


- Meets IEEE 802.3 and ANSI X3.263 requirements including 350µH OCL with 8mA DC bias
- For use with Broadcom BCM5400, BCM5401, BCM5402 and the Marvell 88E1000 Gigabit phy transceivers
- Includes integrated LEDs. LED signal leads are isolate from the Ethernet signal leads to reduce EMI and crosstalk
- Contact Plating: 6u-inch gold flashed



Mechanical and Schematic (All dimensions in millimetres)

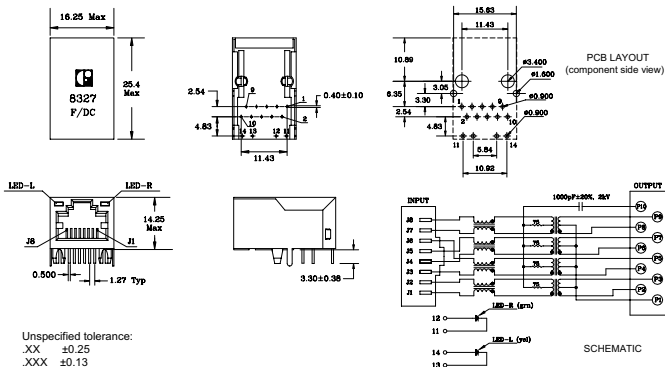

ELECTRICAL SPECIFICATION @ 25°C

Insertion Loss (dB MAX)				Return Loss (dB MIN)					Crosstalk Attenuation (dB MIN)					CMRR (dB MIN)						
0.1 to 1.0	1.0 to 15.0	15.1 to 60.0	60.1 to 80.0	80.1 to 100	0.1 to .999	1.0 to 15.0	15.1 to 60.0	60.1 to 80.0	80.1 to 100	0.1 to .999	1.0 to 15.0	15.1 to 60.0	60.1 to 80.0	80.1 to 100	0.1 to .999	1.0 to 15.0	15.1 to 60.0	60.1 to 80.0	80.1 to 100	
MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
-1.0	-0.3	-0.6	-1.1	-1.1	-18	-18	-15	-12	-10	-43	-35	-26	-24	-24	-46	-46	-35	-35	-30	

Turns Ratio: (P2-P3):(J1-J2) & (P4-P5):(J3-J6) & (P6-P7):(J4-J5) & (P8-P9):(J7-J8) : 1CT:1CT±3%

Inductance: (P3-P2) & (P4-P5) & (P6-P7) & (P8-P9) @ 100 kHz, 0.1 V, 8mA DC Bias : 350µH MIN

LED Forward Current: @ Input 2 VDC : 20mA Max

Hipot: (Input to Output) @ 1.0 mA, 1 sec : 1500 VAC