

UTC RCR03

CMOS


3 FUNCTION DECODER FOR REMOTE CONTROLLER

DESCRIPTION

The UTC RCR03 is CMOS LST designed for the remote controlled toy. The received signal is amplified by the three-stage amplifier, and then the appropriate amplified signal is sampled, fault-tolerantly checked and decoded to control the actions of the remotecontrolled toy. There is an oscillator in the RCR03. By adding an external resistor conveniently, the oscillator will be constructed. The oscillator frequency can be adjusted by the external resistor. Pressing the ON/OFF button can control the output level of the PC pin.

The UTC RCR03, the auto-power-off function is achieved by an internal counter. When the RCR03 is powered on the counter is reset and begin to count. Any received encoding signal also reset the counter. The PC output pin will keep on a high level until the counter counts up to about 6 minutes. The PC output is used to control on/off state of the external power supply.

The UTC RCR03 have four output pins corresponding with the three actions: Forward, Backward and Left.

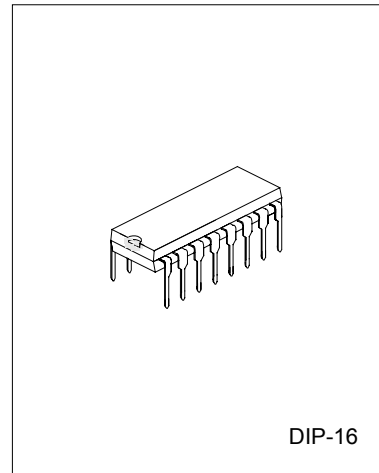

FEATURES

- * Operating power-supply voltage range: 2.5 to 5.5V
- * Manual-power-on/off with ON/OFF button
- * One output pin used for external power control
- * On-chip oscillator with an external resistor
- * On-chip reversing amplifiers
- * Low operating current
- * Few external components needed
- * Four output pins for three function
- * Manual Power on/off function

DataSheet4U.com

DataShee


UTC UNISONIC TECHNOLOGIES CO., LTD. 1

QW-R502-003.A


UTC RCR03

CMOS

RCR03 LOCK DIAGRAM

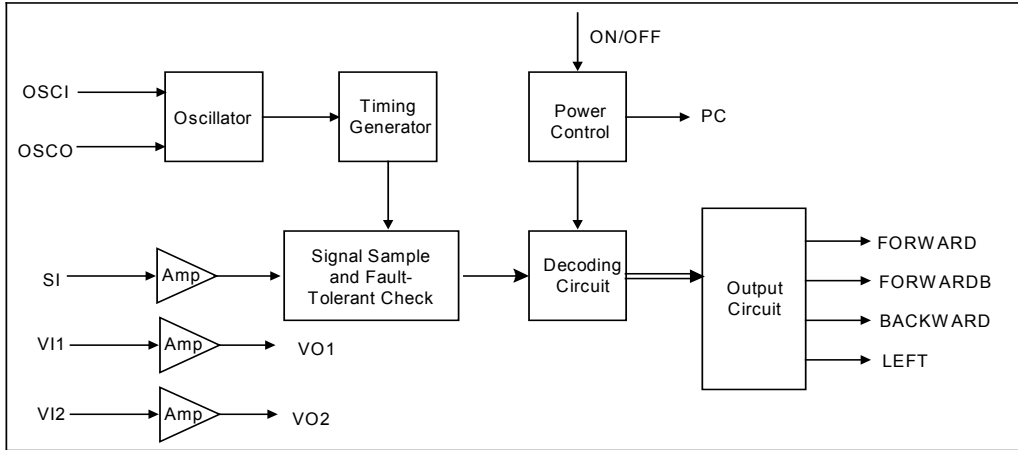

PRODUCT PIN CONFIGURATION AND DESCRIPTION

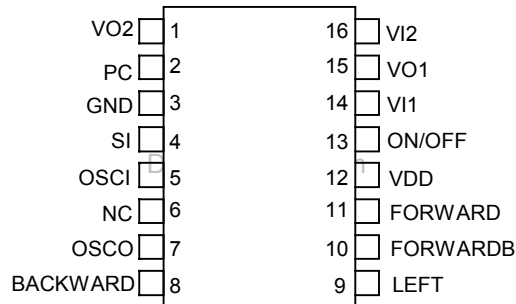

PIN NO.	PIN NAME	DESCRIPTION
1	VO2	Output pin for the amplifier 2
2	PC	Power control output pin
3	GND	Negative power supply
4	SI	Input pin of the encoding signal
5	OSCI	Oscillator input pin
6	NC	No Connection
7	OSCO	Oscillator output pin
8	BACKWARD	Backward output pin
9	LEFT	Left output pin
10	FORWARDB	Reversing output of the forward pin
11	FORWARD	Forward output pin
12	VDD	Positive power supply
13	ON/OFF	Input pin used to control the output level of the PC
14	VI1	Input pin for the amplifier 1
15	VO1	Output pin for the amplifier 1
16	VI2	Input pin for the amplifier 2

UTC RCR03

CMOS

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
DC Input Voltage	V_{IN}	-0.5 ~ +6.5	V
Supply Voltage to Ground Potential(Inputs &V _{DD} Only)		-0.5 ~ +6.5	V
Supply Voltage to Ground Potential(Outputs &D/O Only)		-0.5 ~ +6.5	V
DC Output Current	I_O	20	mA
Power Dissipation	P_D	500	mW
Ambient Temperature With Power Applied	T_A	-10 to +40	°C
Storage Temperature	T_{STG}	-25 to +85	°C

DC ELECTRICAL CHARACTERISTICS (Over the operating rating, $T_A = -10^{\circ}\text{C} \sim +40^{\circ}\text{C}$, $V_{DD} = 4.0\text{V} \pm 10\%$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Operating Voltage	V_{DD}		2.5	4.0	5.5	V
Supply Current	I_{DD}	*			3.0	mA
Standby Current	I_{STB}	*			20	μA
Input Current	I_{IN}	For ON/OFF pin			60	μA
Input Low Voltage	V_{IL}	Guaranteed Logic Low Level			0.5	V
Input High Voltage	V_{IH}	Guaranteed Logic High Level			$V_{DD}-0.5$	V
Output High Voltage	V_{OH}	$I_{OUT}=200\mu\text{A}$			$V_{DD}-0.5$	V
Output High Current	I_{OH}	$V_{OUT}=1.4\text{V}$	-1.5			mA
Output Low Voltage	V_{OL}	$I_{OUT}=500\mu\text{A}$			0.5	V
Output Low Current	I_{OL}	$V_{OUT}=0.5\text{V}$	500			μA

Note*: Output unload: $2.2\text{M}\Omega$ feedback resistors for the two reversing amplifiers; $470\text{k}\Omega$ external resistor for the on-chip oscillator.

AC ELECTRICAL CHARACTERISTICS (Over the operating rating, $T_A = -10^{\circ}\text{C}$ to $+40^{\circ}\text{C}$, $V_{DD} = 4.0\text{V} \pm 10\%$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Oscillator Frequency	F_{OSC}	$T_A=25^{\circ}\text{C}, R=470\text{K}\Omega$	70	88	106	KHz
Frequency of received backward code	F_{BACK}	$F_{OSC}=88\text{KHz}$	200		400	Hz
Frequency of received forward code	F_{FOR}	$F_{OSC}=88\text{KHz}$	0.8		1.2	KHz
Frequency of received left code	F_{LEFT}	$F_{OSC}=88\text{KHz}$	2.4		3.6	KHz
SI Pin V _{pp} Receive Sensitivity	V_{SI}	Guaranteed EffectiveDecoding	300			mV
Time of Auto-Power-Off	T_{OFF}^*	$F_{OSC}=70$ to 106 KHz	4.8	6	7.2	min.

Note*: when adjust the external oscillator resistor, the auto-power-off time will vary relevantly. Effect decoding frequency variation, Typical $\pm 20\%$.

UTC UNISONIC TECHNOLOGIES CO., LTD.

3


QW-R502-003.A

UTC RCR03

CMOS


OUTPUT TIMING

Backward Output Timing

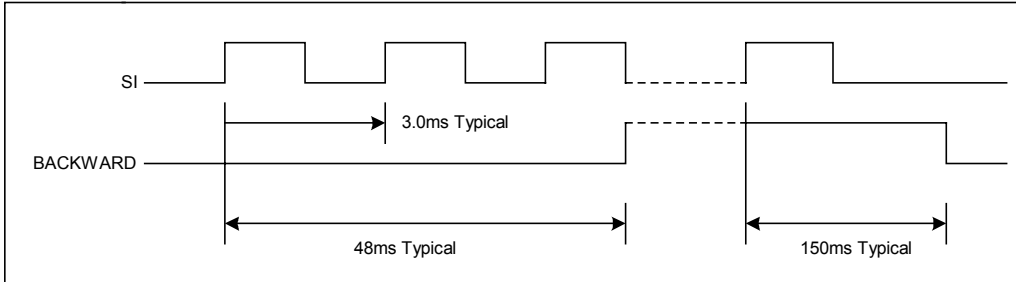


wave 1

Forward Output Timing

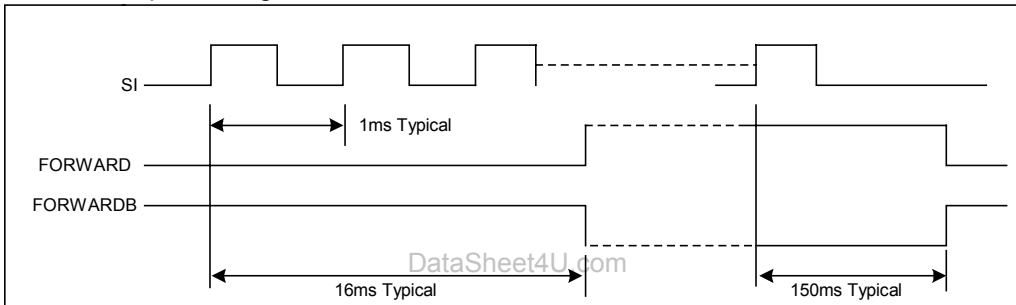

wave 2

Left Output Timing

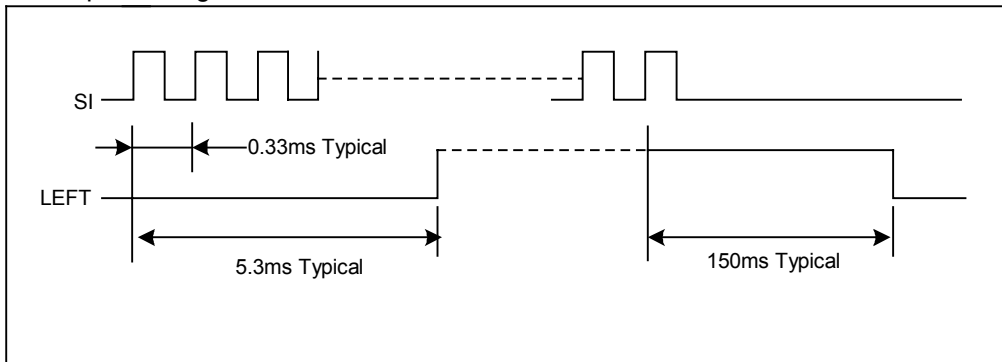


wave 3

UTC RCR03

CMOS

PC Output Timing

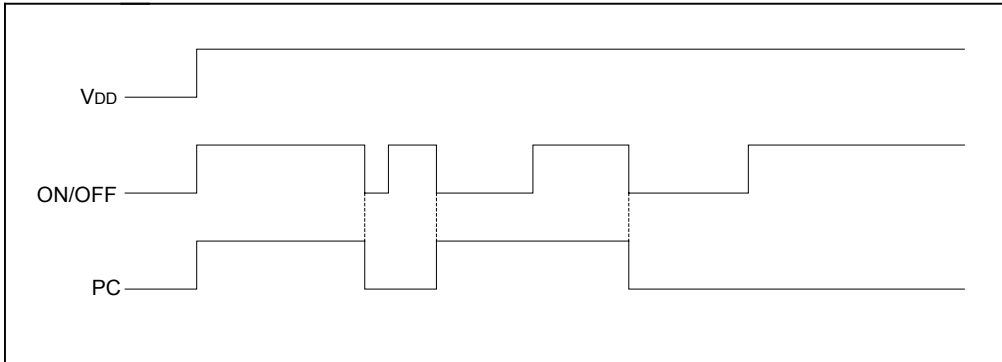

wave 4

TEST CIRCUIT

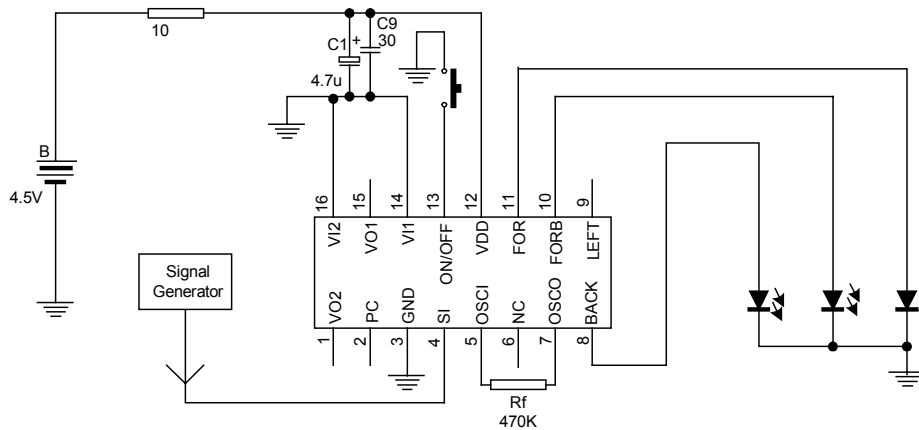


Figure 1
 *Forward Signal F=1kHz
 *Backward Signal F=340Hz
 *Left Signal F=3kHz

UTC RCR03

CMOS

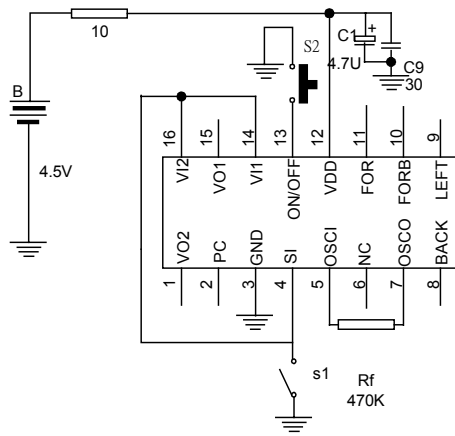


Figure2 Testing stand-by current

The Sender Circuit

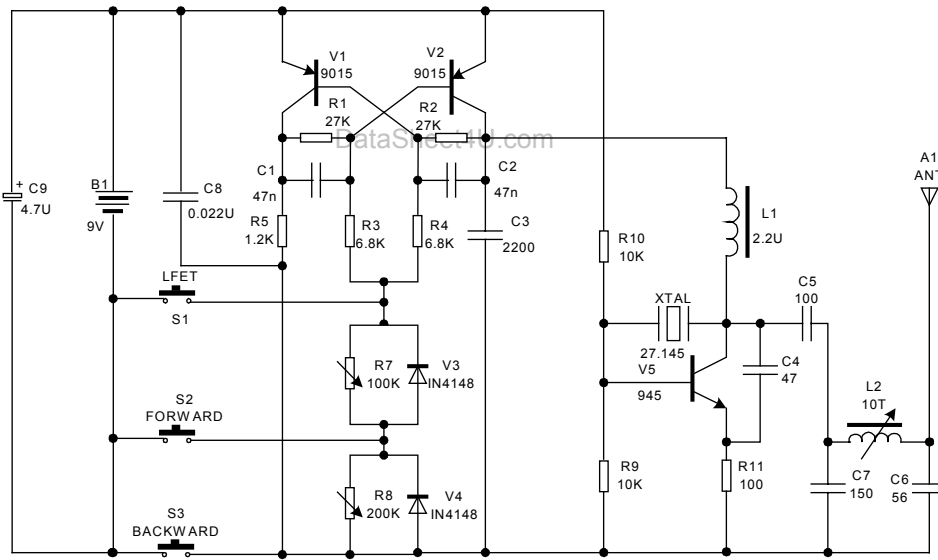


Figure 3

Note: Typical R7=4.4K
R8=22.3K

UTC RCR03

CMOS

Application Circuit(6~12V)

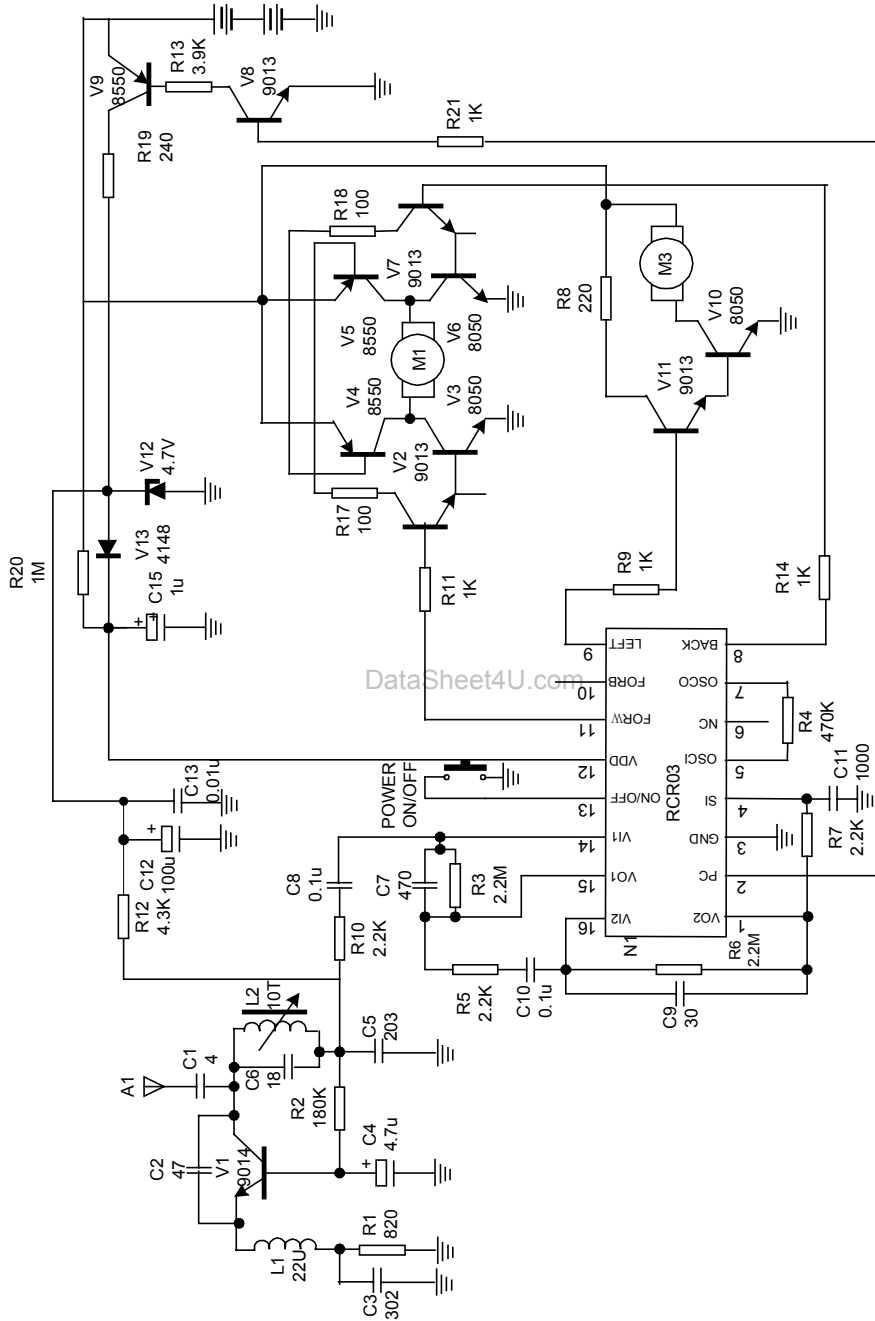


Figure 4
APPLICATION CIRCUIT (6-12V)

UTC UNISONIC TECHNOLOGIES CO., LTD.

UTC RCR03

CMOS

et4U.com

DataSheet4U.com

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

UTC UNISONIC TECHNOLOGIES CO., LTD. 9

QW-R502-003.A

DataSheet4U.com

www.DataSheet4U.com

DataSheet4U.com