

**KPC714A • KPC724A • KPC744A**

These Photocouplers consist of two Gallium Arsenide Infrared Emitting Diodes connected in a reverse-paralled configuration for AC-input and a Silicon NPN Phototransistor per a channel

- The KPC714A has one channel in a 4-pin DIP package
- The KPC724A has two channels in a 8-pin DIP package
- The KPC744A has four channels in a 16-pin DIP package

**FEATURES**


- Small Package Size
- Collector-Emitter Voltage : Min.35V
- Current Transfer Ratio : 50% Min.(at  $I_F = \pm 1\text{mA}$ )
- Electrical Isolation Voltage : AC2500Vrms
- UL Recognized File No. E107486

**APPLICATIONS**

- AC Signal Input
- Interface between two circuits of difference
- Vending Machine
- Cordless Phone, Key Phone
- Programmable Logic Control

**DIMENSION**

(Unit : mm)

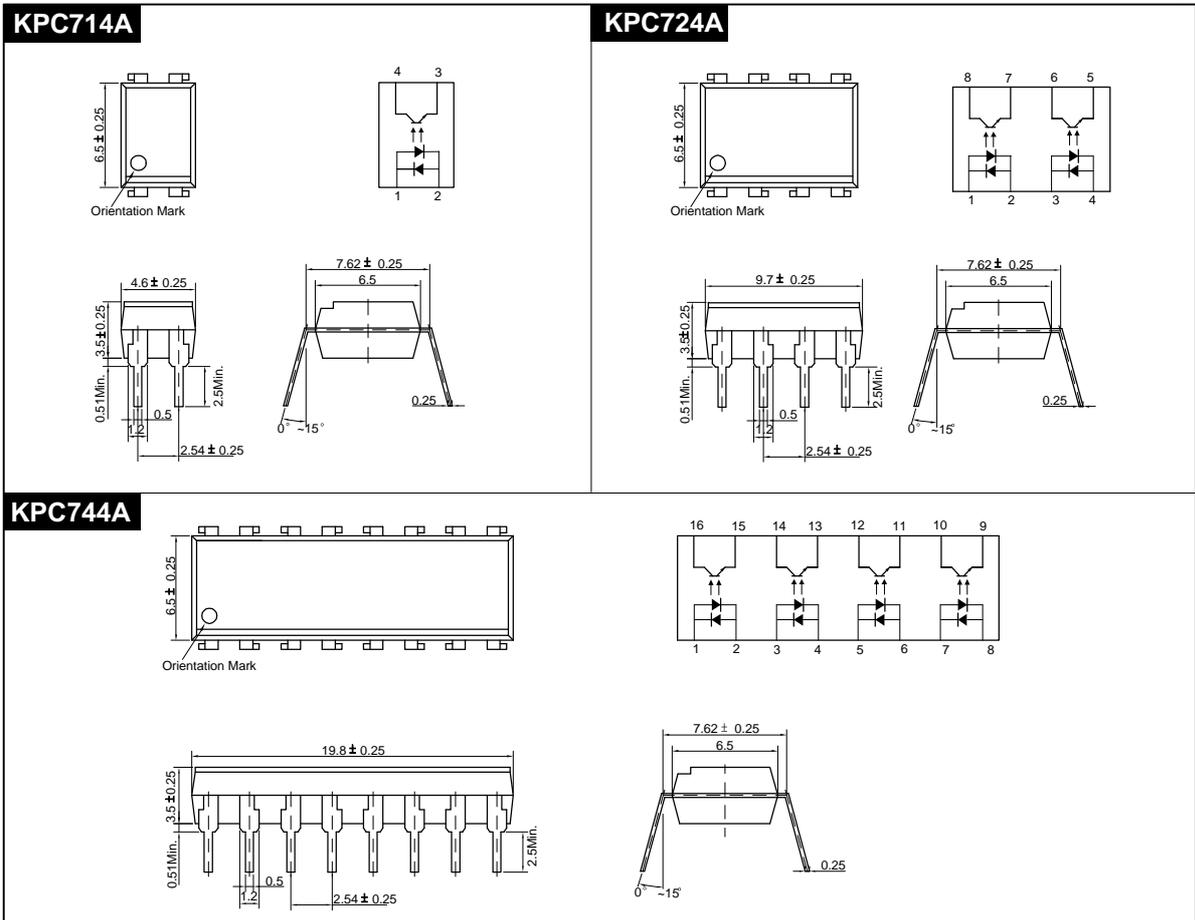

# KPC714A • KPC724A • KPC744A

## MAXIMUM RATINGS

(Ta=25 )

Parameter		Symbol	Rating	Unit
Input	Forward Current	IF	50	mA
	Peak Forward Current <sup>*1</sup>	IFP	1	A
	Power Dissipation	PD	70	mW
Output	Collector-Emitter Breakdown Voltage	BVCEO	35	V
	Emitter-Collector Breakdown Voltage	BVECO	6	V
	Collector Current	IC	50	mA
	Collector Power Dissipation	PC	150	mW
Input to Output Isolation Voltage <sup>*2</sup>		Viso	AC2500	V <sub>rms</sub>
Storage Temperature		T <sub>stg</sub>	-55~+125	
Operating Temperature		T <sub>opr</sub>	-30~+100	
Lead Soldering Temperature <sup>*3</sup>		T <sub>sol</sub>	260	
Total Power Dissipation		P <sub>tot</sub>	200	mW

\*1. Input current with 100μs pulse width, 1% duty cycle

\*2. Measured at RH=40~60% for 1min

\*3. 1/16 inch form case for 10sec

## ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25 , unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V <sub>F</sub>	IF= ±10mA	-	1.15	1.30	V
	Capacitance	C <sub>T</sub>	V=0, f=1kHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BVCEO	IC=0.5mA	35	-	-	V
	Emitter-Collector Breakdown Voltage	BVECO	IE=0.1mA	6	-	-	V
	Collector Dark Current	ICEO	IF=0, VCE=24V	-	-	100	nA
	Capacitance	C <sub>CE</sub>	VCE=0, f=1kHz	-	10	-	pF
Coupled	Current Transfer Ratio <sup>*4</sup>	CTR	IF= ±1mA, VCE=5V	50	-	600	%
	Collector-Emitter Saturation Voltage	VCE(SAT)	IF= ±5mA, IC=1mA	-	0.2	0.4	V
	Input-Output Capacitance	C <sub>IO</sub>	V=0, f=1kHz	-	1	-	pF
	Input-Output Isolation Resistance	R <sub>IO</sub>	RH=40~60%, V=500V	-	10 <sup>11</sup>	-	
	Rise Time	t <sub>r</sub>	VCE=5V, RL=100	-	4	-	μs
	Fall Time	t <sub>f</sub>	IC=2mA	-	4	-	μs
Symmetry Ratio		CTR1/CTR2		1	-	3	


\*4. CTR=(IC/IF) X 100 (%)

**KPC714A • KPC724A • KPC744A**


**Forward Current vs. Ambient Temperature**

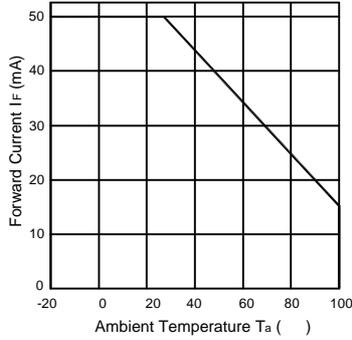


**Collector Power Dissipation vs. Ambient Temperature**

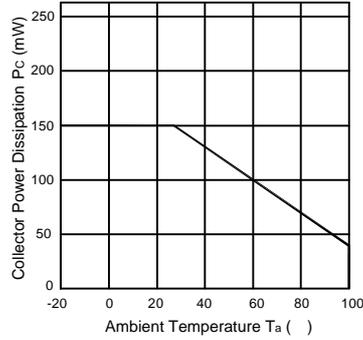


**Forward Current vs. Forward Voltage**

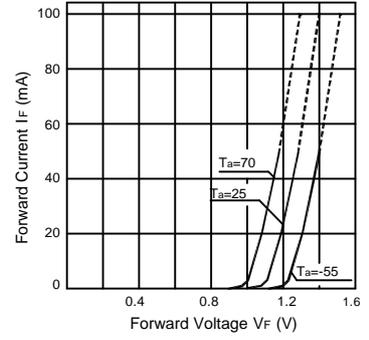


**Collector Current vs. Collector-Emitter Voltage**

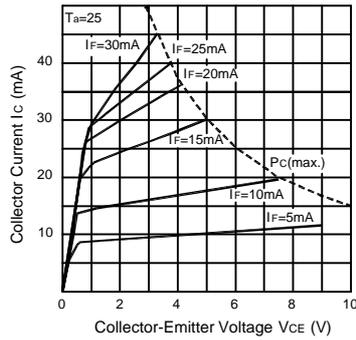


**Dark Current vs. Ambient Temperature**

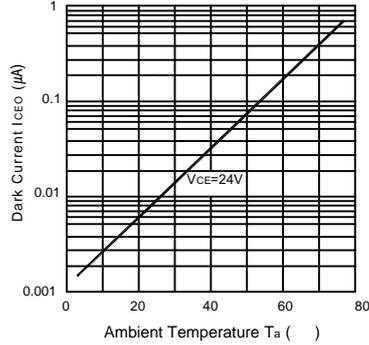


**Collector Current vs. Ambient Temperature**

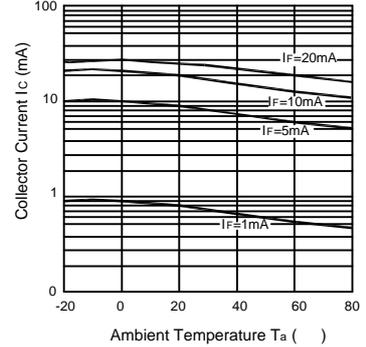

**Response Time vs. Load Resistance**

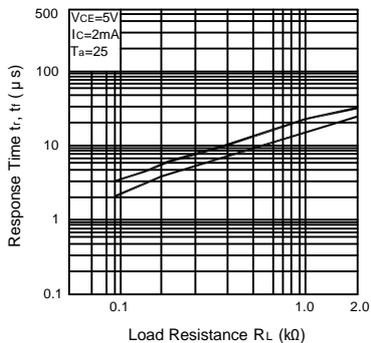

**Collector Current vs. Forward Current**

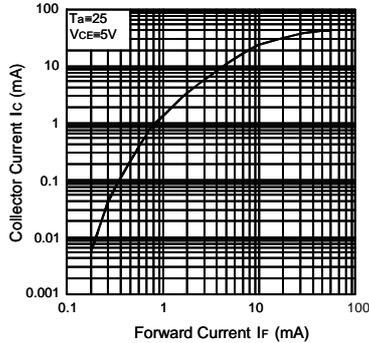

**Switching Time Test Circuit**

