

Silicon NPN RF Transistor

BFQ540

DESCRIPTION



- High Gain
- High Output Voltage
- Low Noise

APPLICATIONS

- Designed for use in VHF, UHF and CATV amplifiers.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	20	V
V_{CES}	Collector-Emitter Voltage	15	V
V_{EBO}	Emitter-Base Voltage	2	V
I_c	Collector Current-Continuous	120	mA
P_c	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	1.2	W
T_j	Junction Temperature	175	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$

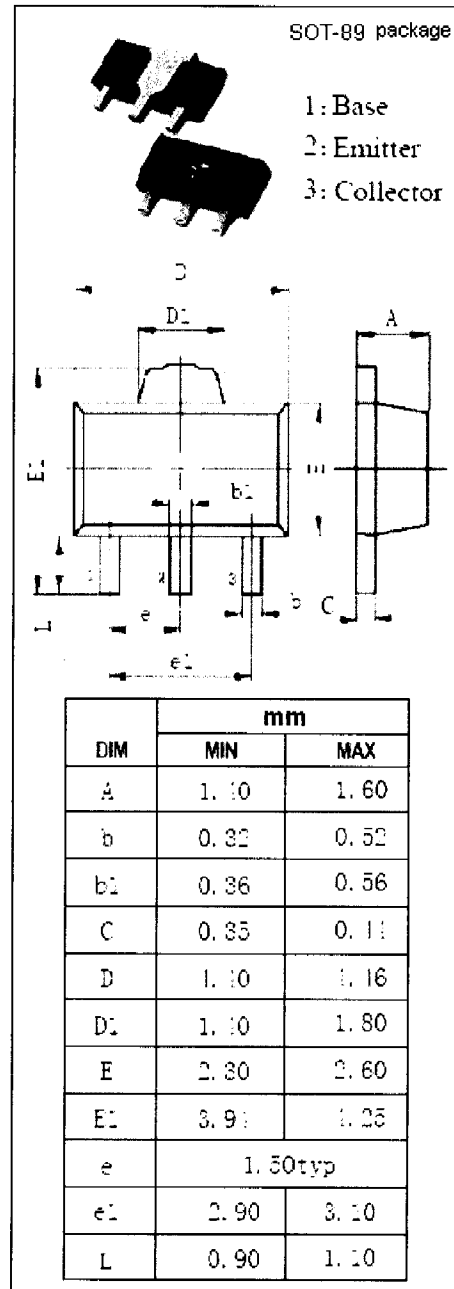

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Silicon NPN RF Transistor

BFQ540

ELECTRICAL CHARACTERISTICS

$T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$I_C=40\ \mu\text{A}$; $R_{BE}=0$	15			V
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=10\ \mu\text{A}$; $I_E=0$	20			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=100\ \mu\text{A}$; $I_C=0$	2			V
I_{CBO}	Collector Cutoff Current	$V_{CB}=8\text{V}$; $I_E=0$			0.05	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=1\text{V}$; $I_C=0$			0.2	μA
h_{FE}	DC Current Gain	$I_C=40\text{mA}$; $V_{CE}=8\text{V}$	60		250	
f_T	Current-Gain—Bandwidth Product	$I_C=40\text{mA}$; $V_{CE}=8\text{V}$; $f=1\text{GHz}$		9		GHz
C_{re}	Feedback Capacitance	$I_E=0$; $V_{CB}=8\text{V}$; $f=1\text{MHz}$		0.9		pF
$ S_{21e} ^2$	Insertion Power Gain	$I_C=40\text{mA}$; $V_{CE}=8\text{V}$; $f=900\text{MHz}$	12	13		dB
NF	Noise Figure	$I_C=40\text{mA}$; $V_{CE}=8\text{V}$; $f=900\text{MHz}$		1.9	2.4	dB

