

TG2206F


RF SPDT SWITCH

SWITCH THE RECEIVE FILTER FOR MOBILE COMMUNICATION
 SWITCH THE DIVERSITY ANTENNA
 SWITCH THE LOCAL SIGNAL



FEATURES

- Low Insertion LOSS : $L_{OSS} = 0.4 \text{ dB (Typ.)}$
- High Isolation : $ISL = 28 \text{ dB (Typ.)}$
- Low Voltage Operation : $V_C = 0 \text{ V} / 2.5 \text{ V}$
- Small Package : SM6 package (2.9*1.6*1.1 mm)

PIN CONNECTION (TOP VIEW)

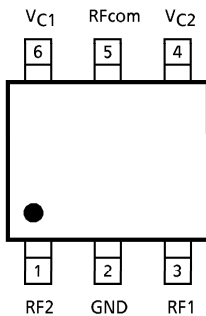

MARKING

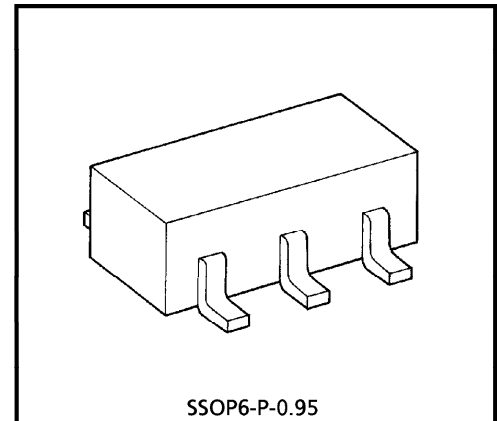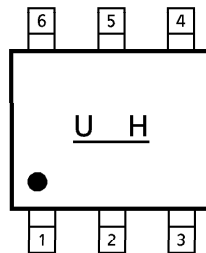

SSOP6-P-0.95
 Weight : 0.014 g (Typ.)

MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Control Voltage	VC1	5	V
	VC2	5	V
Input Power	P _i	1	W
Operating Temperature Range	T _{opr}	-40~85	°C
Storage Temperature Range	T _{stg}	-55~125	°C

CAUTION

This device is electrostatic sensitivity. Please handle with caution.


980910EBC1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

ELECTRICAL CHARACTERISTICS ($f = 1 \text{ GHz}$, $T_a = 25^\circ\text{C}$, $Z_g = Z_l = 50 \Omega$)

CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Insertion Loss	LOSS (1)	1	$V_{C1} = 2.5 \text{ V}$, $V_{C2} = 0 \text{ V}$, $P_i = 0 \text{ dBmW}$	—	0.4	0.7	dB
	LOSS (2)	1	$V_{C1} = 0 \text{ V}$, $V_{C2} = 2.5 \text{ V}$, $P_i = 0 \text{ dBmW}$	—	0.4	0.7	
Isolation	ISL (1)	1	$V_{C1} = 2.5 \text{ V}$, $V_{C2} = 0 \text{ V}$, $P_i = 0 \text{ dBmW}$	25	28	—	dB
	ISL (2)	1	$V_{C1} = 0 \text{ V}$, $V_{C2} = 2.5 \text{ V}$, $P_i = 0 \text{ dBmW}$	25	28	—	
Output Power at 1dB Gain Compression	P_{o1dB}	1	$V_{C1} = 2.5 \text{ V}$, $V_{C2} = 0 \text{ V}$ or $V_{C1} = 0 \text{ V}$, $V_{C2} = 2.5 \text{ V}$	15	20	—	dBmW
Control Current	I_{C1}	—	$V_{C1} = 0 \text{ V}$, $V_{C2} = 3 \text{ V}$ or $V_{C1} = 3 \text{ V}$, $V_{C2} = 0 \text{ V}$	—	—	0.01	mA
	I_{C2}	—		—	—	0.01	
Switching Time	t_{sw}	—	$V_{C1} = 0 \text{ V}$, $V_{C2} = 3 \text{ V}$ or $V_{C1} = 3 \text{ V}$, $V_{C2} = 0 \text{ V}$	—	0.01	—	μs


BLOCK DIAGRAM

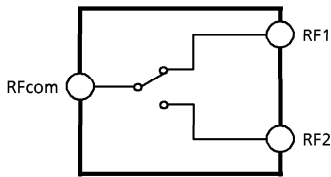

SWITCH CONDITION

CONTROL VOLTAGE	SWITCH CONDITION
$V_{C1} = 2.5 \text{ V}$ $V_{C2} = 0 \text{ V}$	RFcom-RF1 OFF RFcom-RF2 ON
$V_{C1} = 0 \text{ V}$ $V_{C2} = 2.5 \text{ V}$	RFcom-RF1 ON RFcom-RF2 OFF

TEST CIRCUIT1 (RF TEST CIRCUIT)

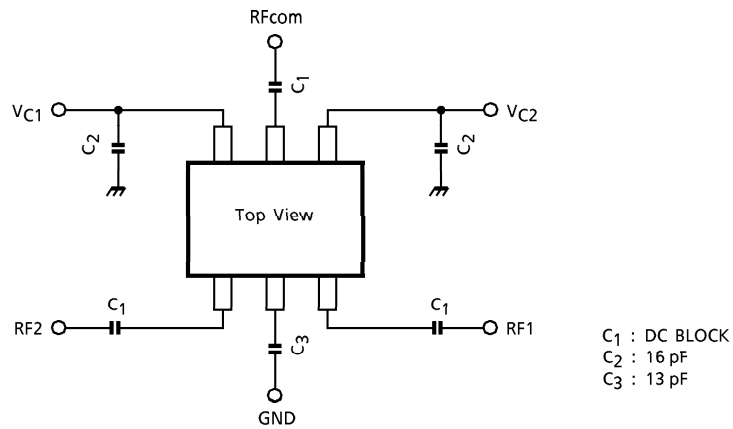







Please fix the value of each capacity for using frequency and circuit.

NOTICE

The circuits and measurements contained in this document are given only in the context of as examples of applications for these products. Moreover, these example application circuits are not intended for mass production, since the high-frequency characteristics (the AC characteristics) of these devices will be affected by the external components which the customer uses, by the design of the circuit and by various other conditions. It is the responsibility of the customer to design external circuits which correctly implement the intended application, and to check the characteristics of the design. TOSHIBA assume no responsibility for the integrity of customer circuit designs or applications.


RECOMMEND CAPACITY

	85 MHz	0.8~1 GHz	1.6 GHz	2 GHz
C1	100 pF	100 pF	22 pF	9 pF
C2	100 pF	16 pF	10 pF	9 pF
C3	150 pF	13 pF	4 pF	3 pF

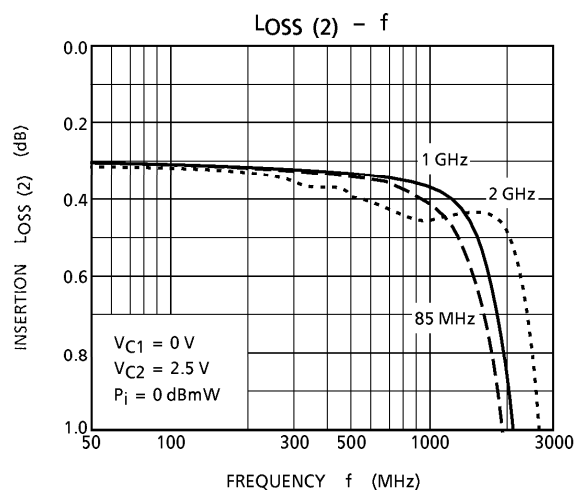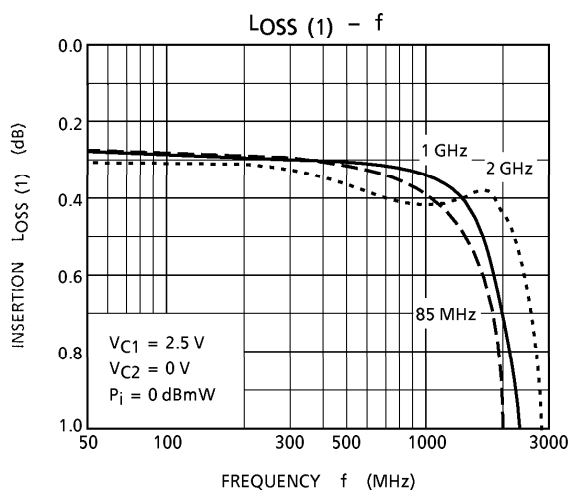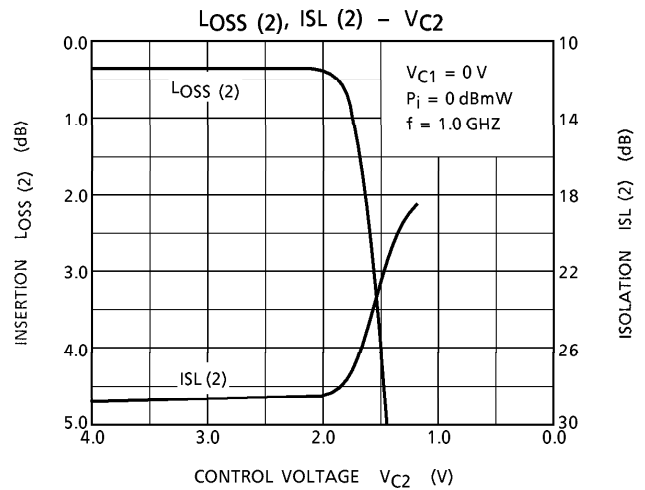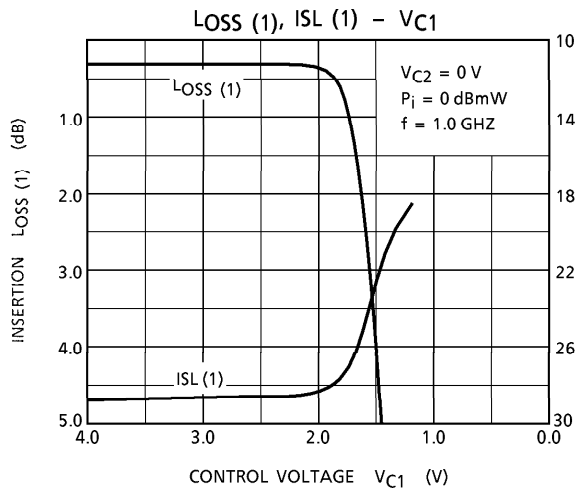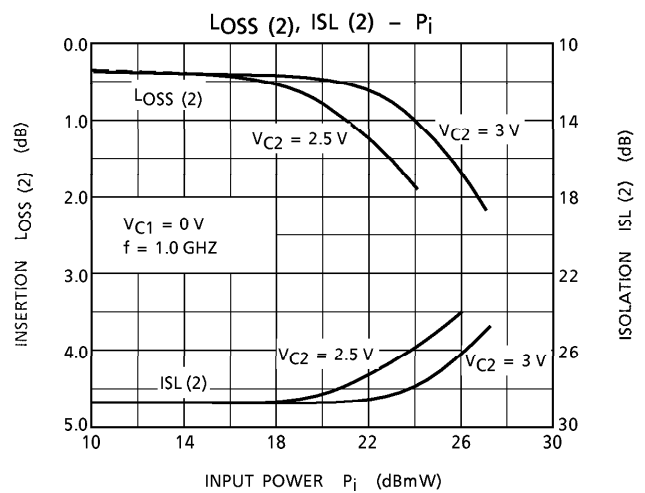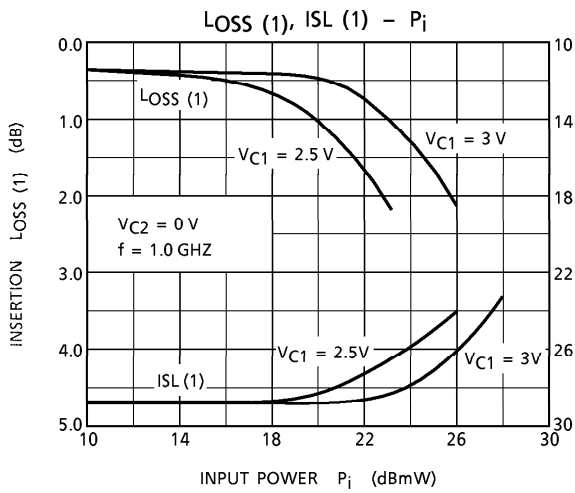


This curve shows the frequency characteristics when recommended capacitance for each frequency added.

This curve shows the frequency characteristics when recommended capacitance for each frequency added.

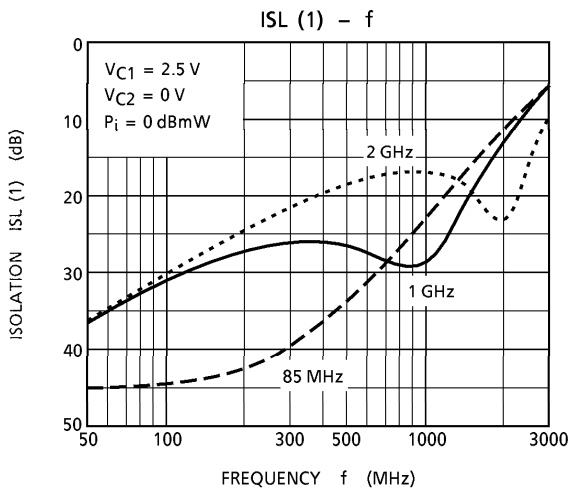


This curve shows the frequency characteristics when recommended capacitance for each frequency added.

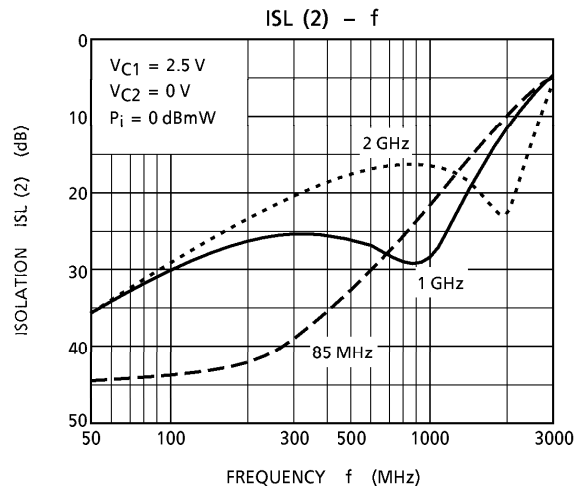

This curve shows the frequency characteristics when recommended capacitance for each frequency added.

PACKAGE DIMENSIONS
SSOP6-P-0.95

Unit : mm

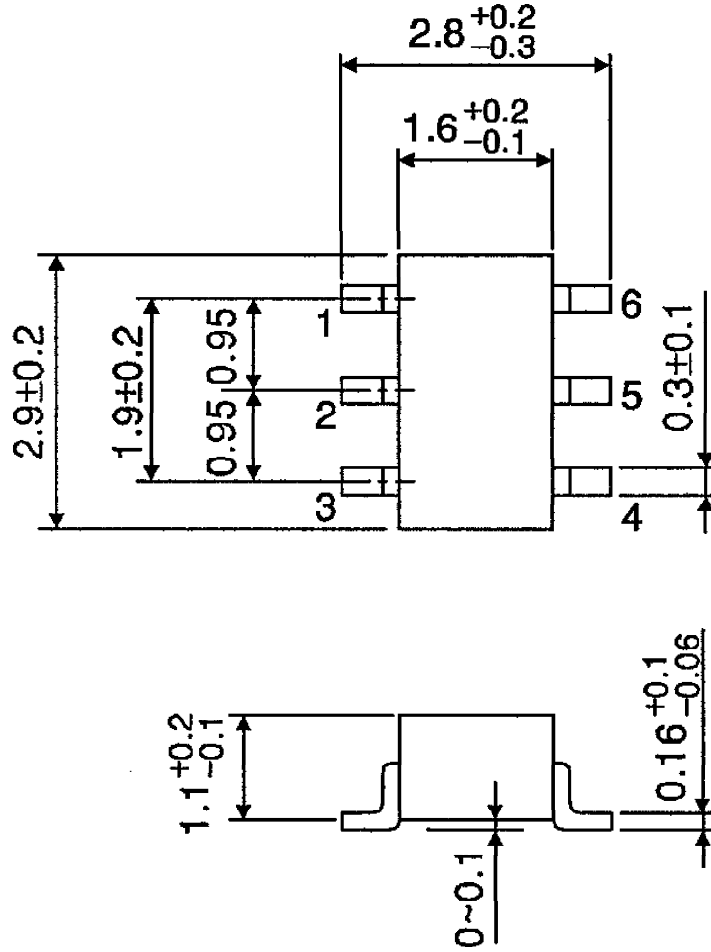

Weight : 0.014 g (Typ.)