

TOSHIBA Transistor Silicon NPN Epitaxial Planar Type

2SC3268


VHF~UHF Band Low Noise Amplifier Applications

- NF = 1.7dB, $|S_{21e}|^2 = 15.0\text{dB}$ (f = 500 MHz)
- NF = 2dB, $|S_{21e}|^2 = 9.5\text{dB}$ (f = 1000 MHz)

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Collector-base voltage	V _{CBO}	17	V
Collector-emitter voltage	V _{CEO}	12	V
Emitter-base voltage	V _{EBO}	3	V
Base current	I _B	30	mA
Collector current	I _C	70	mA
Collector power dissipation	P _C	300	mW
Collector power dissipation	P _C (Note 1)	800	mW
Junction temperature	T _j	125	°C
Storage temperature range	T _{stg}	-55~150	°C

Note 1: When mounted ceramic substrate of 250 mm² × 0.8 mm^t

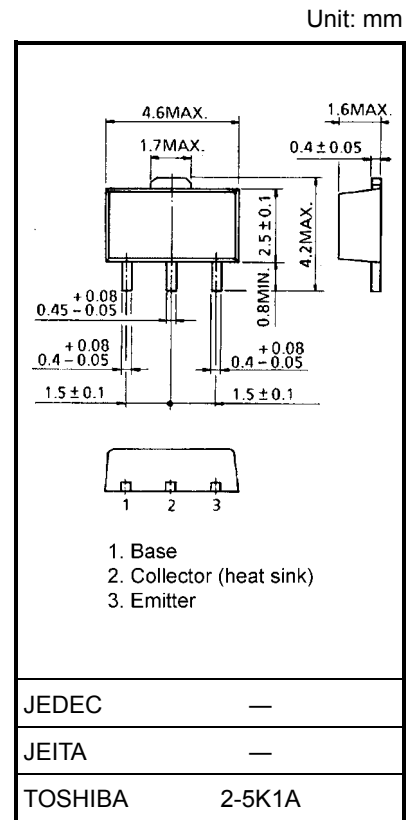

Microwave Characteristics (Ta = 25°C)

Weight: 0.052 g (typ.)







Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Transition frequency	f _T	V _{CE} = 10 V, I _C = 20 mA	—	5	—	GHz
Insertion gain	$ S_{21e} ^2$ (1)	V _{CE} = 10 V, I _C = 20 mA, f = 500 MHz	—	15.0	—	dB
	$ S_{21e} ^2$ (2)	V _{CE} = 10 V, I _C = 20 mA, f = 1 GHz	—	9.5	—	
Noise figure	NF (1)	V _{CE} = 10 V, I _C = 5 mA, f = 500 MHz	—	1.7	—	dB
	NF (2)	V _{CE} = 10 V, I _C = 5 mA, f = 1 GHz	—	2.0	—	



Electrical Characteristics (Ta = 25°C)

Characteristics	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current	I _{CBO}	V _{CB} = 10 V, I _E = 0	—	—	1	μA
Emitter cut-off current	I _{EBO}	V _{EB} = 1 V, I _C = 0	—	—	1	μA
DC current gain	h _{FE}	V _{CE} = 10 V, I _C = 20 mA	25	—	—	
Collector output capacitance	C _{ob}	V _{CB} = 10 V, I _E = 0, f = 1 MHz (Note 2)	—	1.05	—	pF
Reverse transfer capacitance	C _{re}		—	0.7	—	pF


Note 2: C_{re} is measured by 3 terminal method with capacitance bridge.

Marking: ME

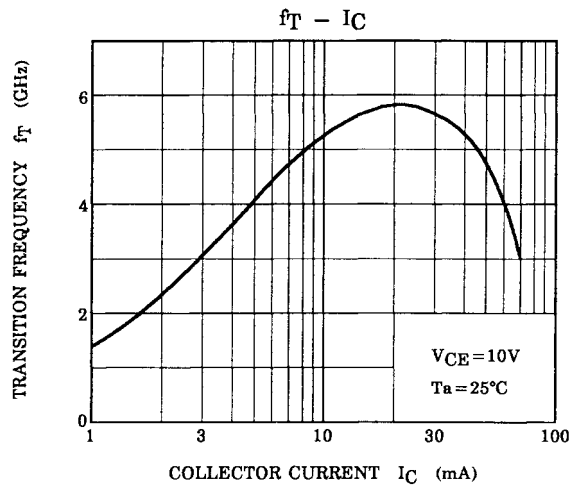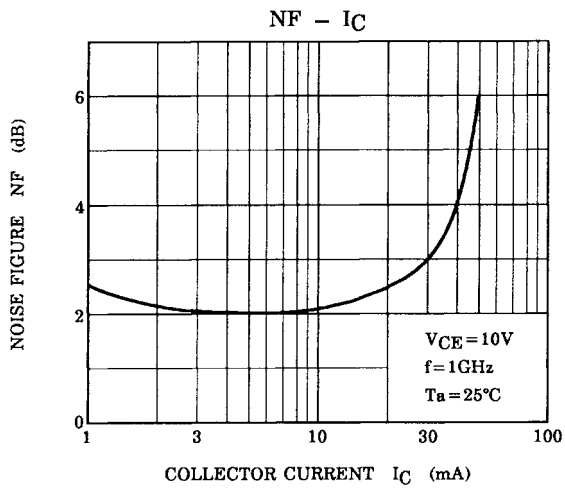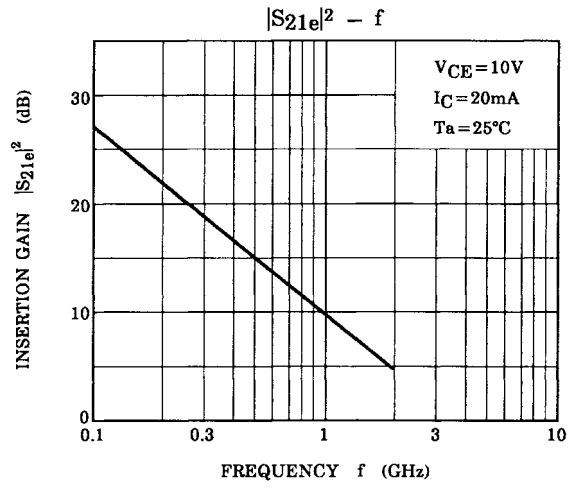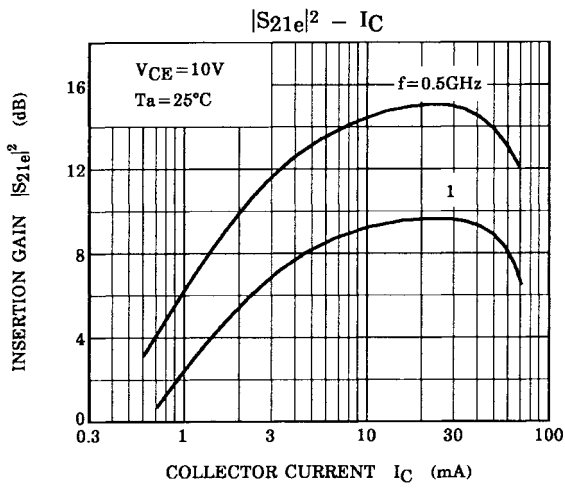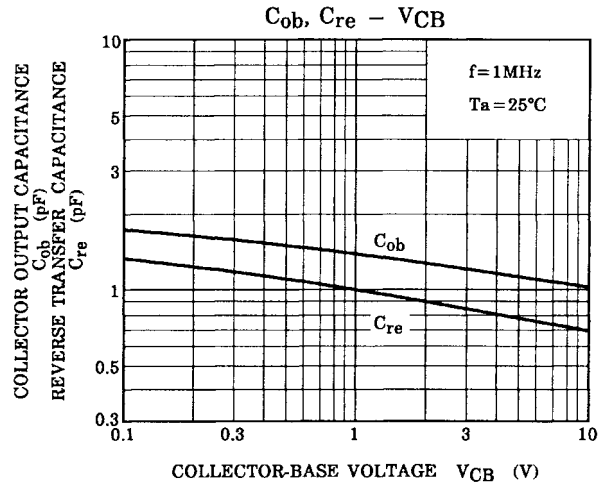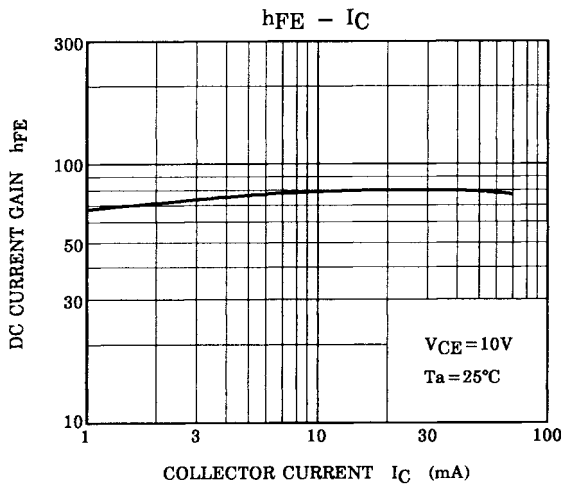


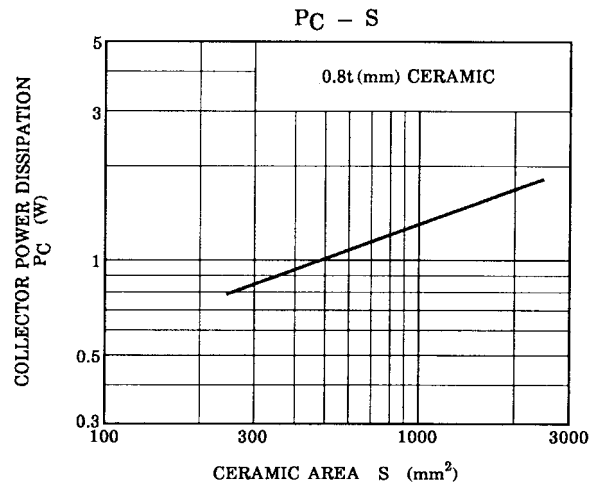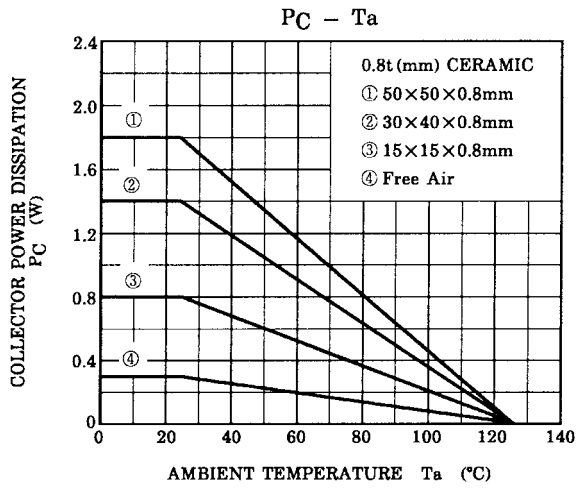


S11e
 VCE=10V
 IC=20mA
 Ta=25°C
 (UNIT : Ω)

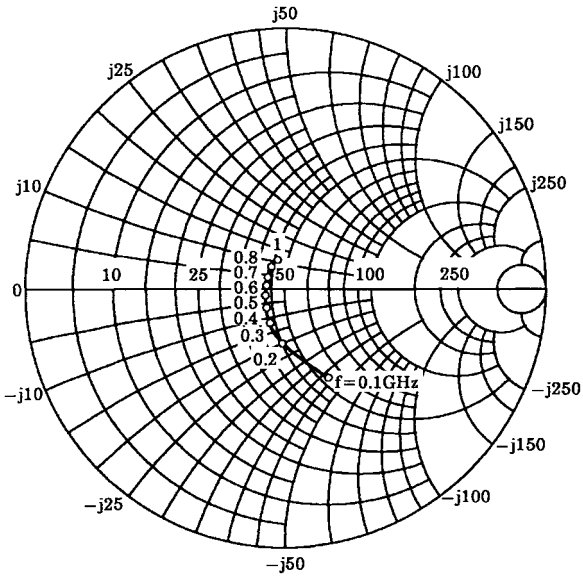


S22e
 VCE=10V
 IC=20mA
 Ta=25°C
 (UNIT : Ω)

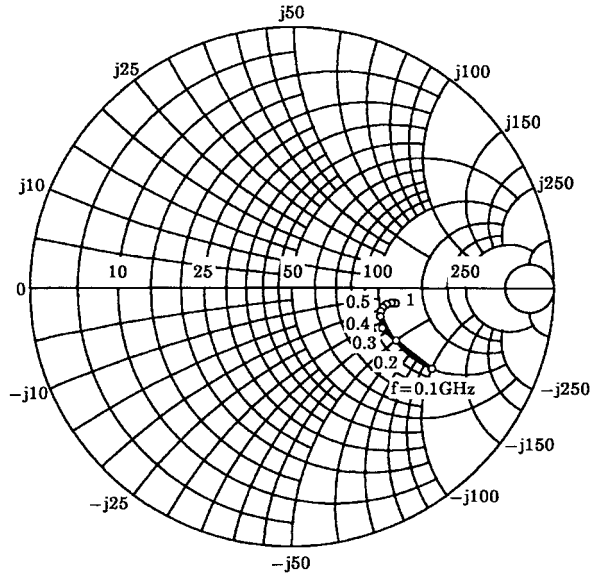

S21e
 VCE=10V
 IC=20mA
 Ta=25°C

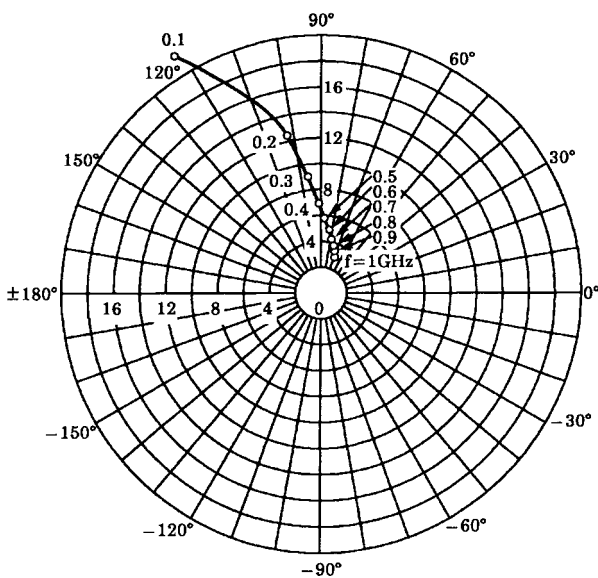

S12e
 VCE=10V
 IC=20mA
 Ta=25°C

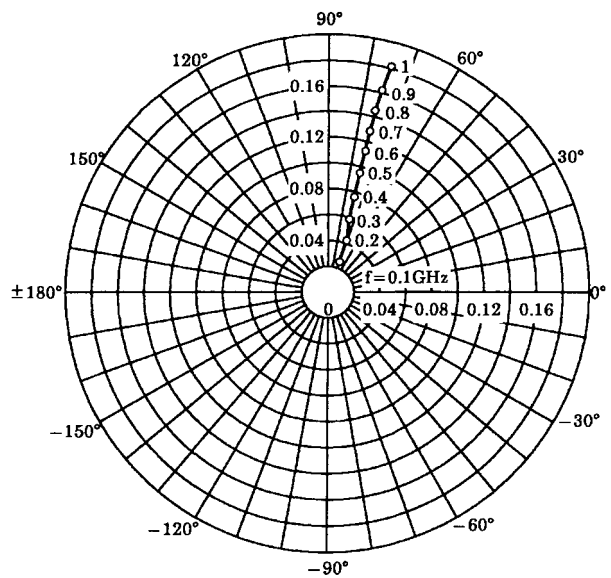

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.