



# SAW Components

Data Sheet B5035





**SAW Components**

**B5035**

**Low-Loss Filter**

**208,0 MHz**

**Data Sheet**


**Features**

- IF low-loss filter for W-CDMA base station
- Usable bandwidth 3,84 MHz
- Balanced or unbalanced operation possible
- Temperature stable
- Ceramic SMD package

**Terminals**

- Gold plated


Ceramic package **QCC10B**

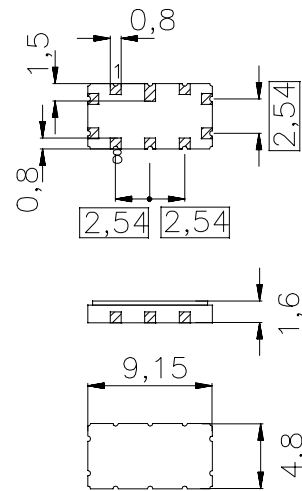

Dimensions in mm, appr. weight 0,23 g

**Pin configuration**

- |            |                |
|------------|----------------|
| 10, 9      | Input          |
| 5, 4       | Output         |
| 1, 3, 6, 8 | Case ground    |
| 2, 7       | To be grounded |

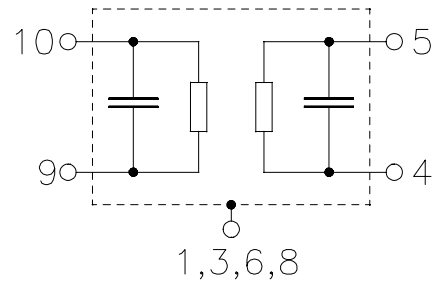

Type	Ordering code	Marking and Package according to	Packing according to
B5035	B39211-B5035-Z710	C61157-A7-A49	F61074-V8172-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	-40 / +85	°C	
Storage temperature range	$T_{stg}$	-40 / +85	°C	
DC voltage	$V_{DC}$	0	V	
Source power	$P_s$	0	dBm	


**SAW Components**
**B5035**
**Low-Loss Filter**
**208,0 MHz**
**Data Sheet**
**Characteristics**

Operating temperature range:  $T = +5 \dots +75 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 200 \text{ } \Omega$  balanced and matching network  
 Terminating load impedance:  $Z_L = 200 \text{ } \Omega$  balanced and matching network

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	208,0	—	MHz
<b>Minimum insertion attenuation</b>	$\alpha_{\min}$	—	11	13	dB
<b>Passband width</b>	$\alpha_{\text{rel}} \leq 1 \text{ dB}$ $B_{1\text{dB}}$	—	4,2	—	MHz
<b>Amplitude ripple (p-p)</b>	$f_N \pm 1,92 \text{ MHz}$ $\Delta\alpha$	—	0,6	1,0	dB
<b>Phase ripple (p-p)</b>	$f_N \pm 1,92 \text{ MHz}$ $\Delta\phi$	—	5	—	$^\circ$
<b>Phase ripple (rms)</b>	$f_N \pm 1,92 \text{ MHz}$ $\Delta\phi$	—	1,1	1,5	$^\circ$
<b>Error vector magnitude</b>	$EVM$	—	2,6	6,0	%
<b>Absolute group delay (mean within <math>f_N \pm 1,92 \text{ MHz}</math>)</b>	$\tau_{\text{mean}}$	1,129	1,134	1,139	$\mu\text{s}$
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
$f_N \pm 2,515 \text{ MHz} \dots f_N \pm 2,6 \text{ MHz}$		17	20	—	dB
$f_N \pm 2,6 \text{ MHz} \dots f_N \pm 2,8 \text{ MHz}$		25	30	—	dB
$f_N \pm 2,8 \text{ MHz} \dots f_N \pm 3,3 \text{ MHz}$		30	35	—	dB
$f_N \pm 3,3 \text{ MHz} \dots f_N \pm 20 \text{ MHz}$		40 <sup>1)</sup>	45	—	dB
$f_N \pm 20 \text{ MHz} \dots f_N \pm 28 \text{ MHz}$		45	50	—	dB
$f_N \pm 28 \text{ MHz} \dots f_N \pm 60 \text{ MHz}$		55 <sup>2)</sup>	60	—	dB
<b>Adjacent channel selectivity</b>	$ACS$				
5,0 MHz offset of carrier		45	49	—	dB
<b>Input IP3</b>		40	—	—	dBm
<b>Temperature coefficient of frequency <sup>3)</sup></b>	$TC_f$	—	-0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	20	—	$^\circ\text{C}$

<sup>1)</sup> Except for two narrow-band responses between 219 and 222 MHz which may reach 2 dB above

<sup>2)</sup> Except for two narrow-band responses between 236 and 240 MHz which may reach 2 dB above

<sup>3)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



**SAW Components**

**B5035**

**Low-Loss Filter**

**208,0 MHz**

**Data Sheet**

**Characteristics**

Operating temperature range:  $T = -40 \dots +85 \text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 200 \text{ } \Omega$  balanced and matching network  
 Terminating load impedance:  $Z_L = 200 \text{ } \Omega$  balanced and matching network

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	208,0	—	MHz
<b>Minimum insertion attenuation</b>	$\alpha_{\min}$	—	11	13,2	dB
<b>Passband width</b>	$\alpha_{\text{rel}} \leq 1 \text{ dB}$ $B_{1\text{dB}}$	—	4,2	—	MHz
<b>Amplitude ripple (p-p)</b>	$f_N \pm 1,92 \text{ MHz}$ $\Delta\alpha$	—	0,6	1,2	dB
<b>Phase ripple (p-p)</b>	$f_N \pm 1,92 \text{ MHz}$ $\Delta\phi$	—	5	—	$^\circ$
<b>Phase ripple (rms)</b>	$f_N \pm 1,92 \text{ MHz}$ $\Delta\phi$	—	1,1	1,5	$^\circ$
<b>Error vector magnitude</b>	$EVM$	—	2,6	6,0	%
<b>Absolute group delay (mean within <math>f_N \pm 1,92 \text{ MHz}</math>)</b>	$\tau_{\text{mean}}$	1,129	1,134	1,139	$\mu\text{s}$
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
$f_N \pm 2,515 \text{ MHz} \dots f_N \pm 2,6 \text{ MHz}$		17	20	—	dB
$f_N \pm 2,6 \text{ MHz} \dots f_N \pm 2,8 \text{ MHz}$		25	30	—	dB
$f_N \pm 2,8 \text{ MHz} \dots f_N \pm 3,3 \text{ MHz}$		30	35	—	dB
$f_N \pm 3,3 \text{ MHz} \dots f_N \pm 20 \text{ MHz}$		40 <sup>1)</sup>	45	—	dB
$f_N \pm 20 \text{ MHz} \dots f_N \pm 28 \text{ MHz}$		45	50	—	dB
$f_N \pm 28 \text{ MHz} \dots f_N \pm 60 \text{ MHz}$		55 <sup>2)</sup>	60	—	dB
<b>Adjacent channel selectivity</b>	$ACS$				
5,0 MHz offset of carrier		45	49	—	dB
<b>Input IP3</b>		40	—	—	dBm
<b>Temperature coefficient of frequency <sup>3)</sup></b>	$TC_f$	—	- 0,036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	$T_0$	—	20	—	$^\circ\text{C}$

<sup>1)</sup> Except for two narrow-band responses between 219 and 222 MHz which may reach 2 dB above

<sup>2)</sup> Except for two narrow-band responses between 236 and 240 MHz which may reach 2 dB above


<sup>3)</sup> Temperature dependance of  $f_c$ :  $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



Data Sheet

Matching network to 200  $\Omega$

Transformers are only required for measurement in a 50  $\Omega$  environment

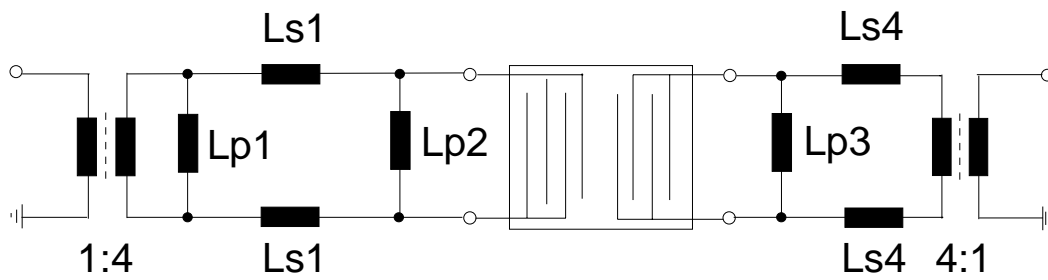

- $L_{s1} = 100 \text{ nH}$
- $L_{p2} = 100 \text{ nH}$
- $L_{p1} = 560 \text{ nH}$  (for trimming)


- $L_{p3} = 150 \text{ nH}$
- $L_{s4} = 150 \text{ nH}$

Element values depend upon board layout.




Data Sheet

Transfer function

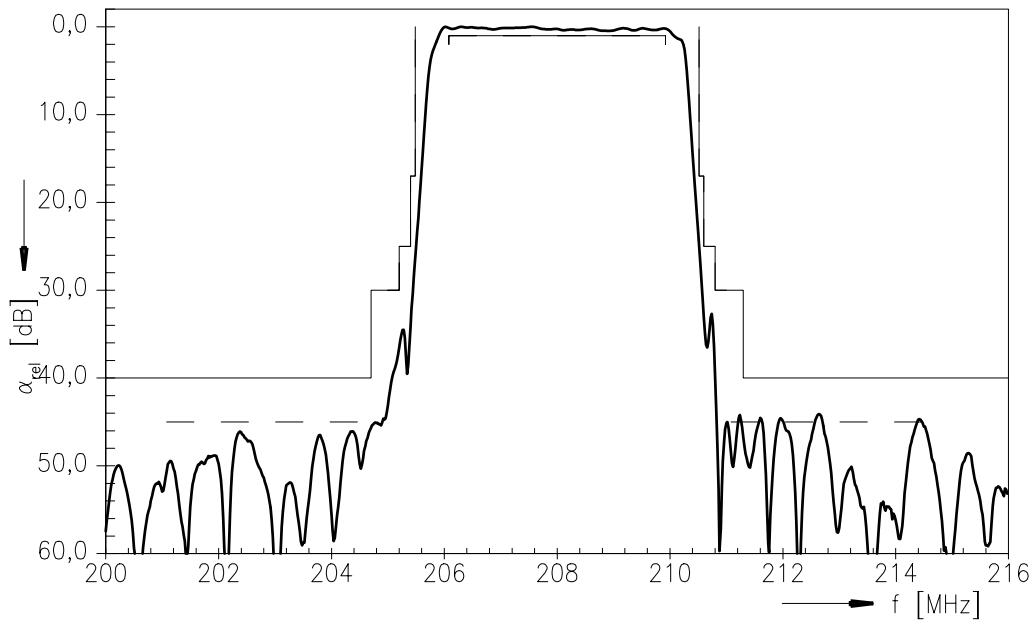

Transfer function (pass band)

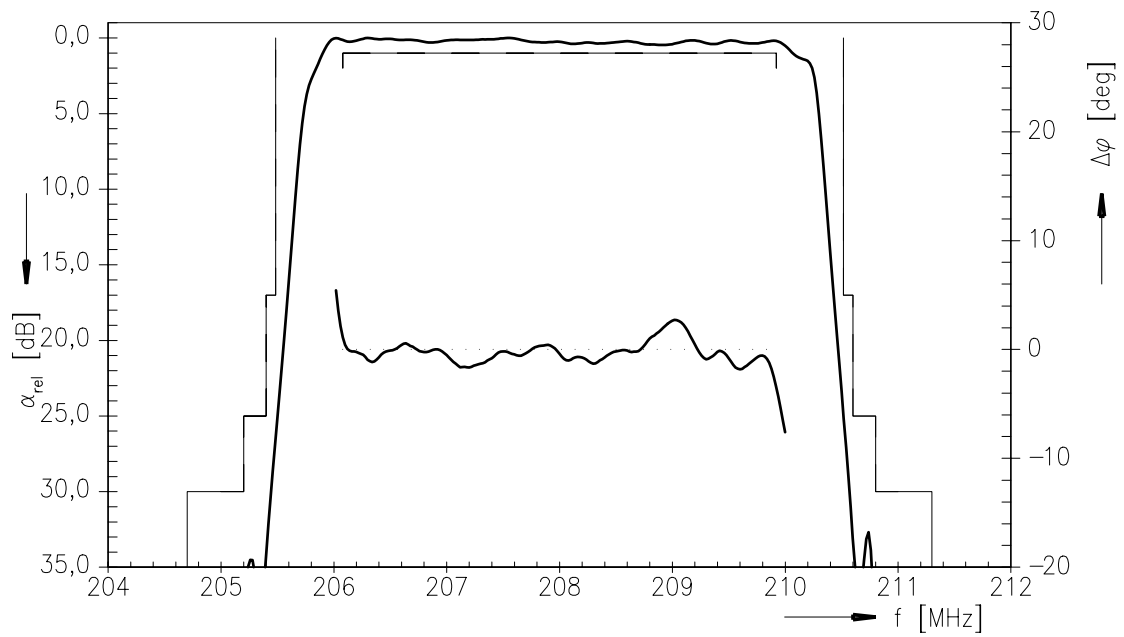



**SAW Components**

**B5035**

**Low-Loss Filter**

**208,0 MHz**

Data Sheet

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW COM**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.