

# GP1S38/GP1S381

## Optical Guide Photointerrupter

### ■ Features

1. Optical guide for setting detecting position that can be devided into Assy substrate (mather substrate ) without leads, connectors, etc.
2. PWB mounting type
3. Easy mounting to PWB due to the holder with hook
4. Gap between light emitter and detector

**GP1S38:**2mm

**GP1S381:**3mm


### ■ Applications

1. VCRs



### ■ Outline Dimensions

(Unit : mm)

**GP1S38**

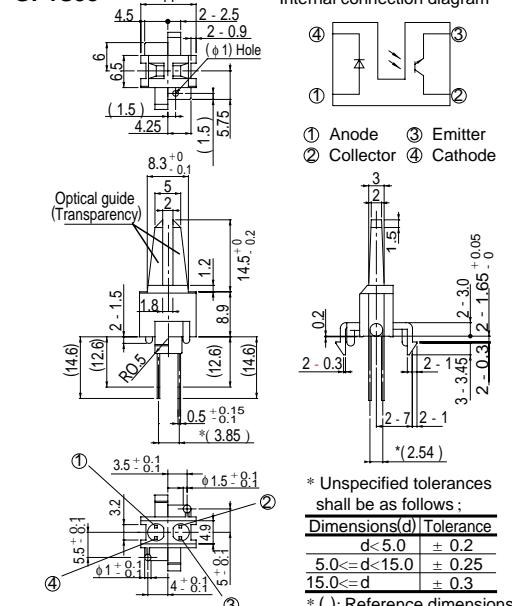

Internal connection diagram




\* Unspecified tolerances shall be as follows;


| Dimensions(d)       | Tolerance  |
|---------------------|------------|
| $d < 5.0$           | $\pm 0.2$  |
| $5.0 \leq d < 15.0$ | $\pm 0.25$ |
| $15.0 \leq d$       | $\pm 0.3$  |

\* ( ): Reference dimensions

**GP1S381**

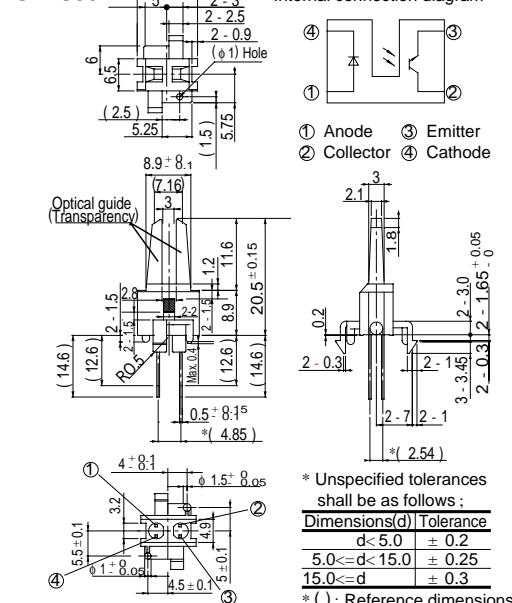

Internal connection diagram



\* Unspecified tolerances shall be as follows;

| Dimensions(d)       | Tolerance  |
|---------------------|------------|
| $d < 5.0$           | $\pm 0.2$  |
| $5.0 \leq d < 15.0$ | $\pm 0.25$ |
| $15.0 \leq d$       | $\pm 0.3$  |

\* ( ): Reference dimensions

## ■ Absolute Maximum Ratings

(Ta = 25°C)

| Parameter                |                             | Symbol           | Rating       | Unit |
|--------------------------|-----------------------------|------------------|--------------|------|
| Input                    | Forward current             | I <sub>F</sub>   | 60           | mA   |
|                          | *1 Peak forward current     | I <sub>FM</sub>  | 1            | A    |
|                          | Reverse voltage             | V <sub>R</sub>   | 6            | V    |
|                          | Power dissipation           | P                | 150          | mW   |
| Output                   | Collector-emitter voltage   | V <sub>CEO</sub> | 35           | V    |
|                          | Emitter-collector voltage   | V <sub>ECO</sub> | 6            | V    |
|                          | Collector current           | I <sub>C</sub>   | 20           | mA   |
|                          | Collector power dissipation | P <sub>C</sub>   | 50           | mW   |
| Operating temperature    |                             | T <sub>opr</sub> | - 25 to + 80 | °C   |
| Storage temperature      |                             | T <sub>stg</sub> | - 40 to + 80 | °C   |
| *2 Soldering temperature |                             | T <sub>sol</sub> | 260          | °C   |

\*1 Pulse width &lt;= 100μ s, Duty ratio: 0.01



\*2 3 seconds or less at the position of 1mm or more from the surface of resin

## ■ Electro-optical Characteristics


(Ta = 25°C)

| Parameter                |                                      | Symbol               | Conditions                                    | MIN. | TYP. | MAX. | Unit |
|--------------------------|--------------------------------------|----------------------|---|------|------|------|------|
| Input                    | Forward voltage                      | V <sub>F</sub>       | I <sub>F</sub> = 50mA                         | -    | -    | 1.5  | V    |
|                          | Peak forward voltage                 | V <sub>FM</sub>      | I <sub>FM</sub> = 0.5A                        | -    | -    | 3.5  | V    |
|                          | Reverse current                      | I <sub>R</sub>       | V <sub>R</sub> = 3V                           | -    | -    | 10   | μ A  |
| Output                   | Collector dark current               | I <sub>CEO</sub>     | V <sub>CE</sub> = 20V                         | -    | -    | 100  | nA   |
| Transfer characteristics | Collector current                    | I <sub>C</sub>       | V <sub>CE</sub> = 5V, I <sub>F</sub> = 20mA   | 100  | -    | -    | μ A  |
|                          | Collector-emitter saturation voltage | V <sub>CE(sat)</sub> | I <sub>F</sub> = 40mA, I <sub>C</sub> = 30μ A | -    | -    | 0.4  | V    |
|                          | Response time                        | t <sub>r</sub>       | V <sub>CE</sub> = 10V, I <sub>C</sub> = 50μ A | -    | 0.85 | 2.5  | ms   |
|                          |                                      | t <sub>f</sub>       | R <sub>L</sub> = 100k Ω                       | -    | 0.75 | 2.1  | ms   |


## ■ Test Circuit for Response Time

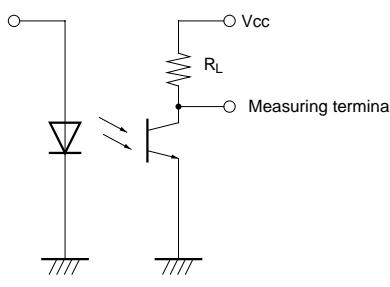


**Fig. 1 Forward Current vs.  
Ambient Temperature**

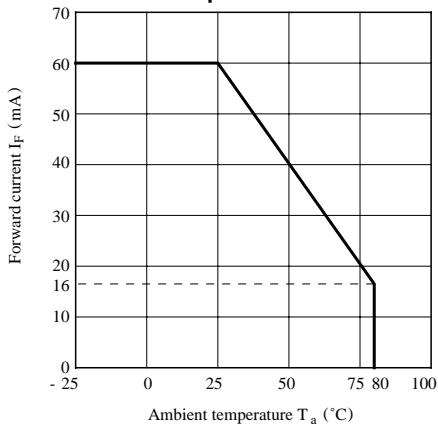


**Fig. 2 Collector Power Dissipation vs.  
Ambient Temperature**

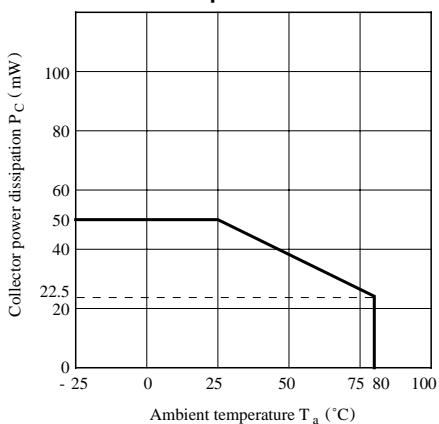


**Fig. 3 Peak Forward Current vs.  
Duty Ratio**

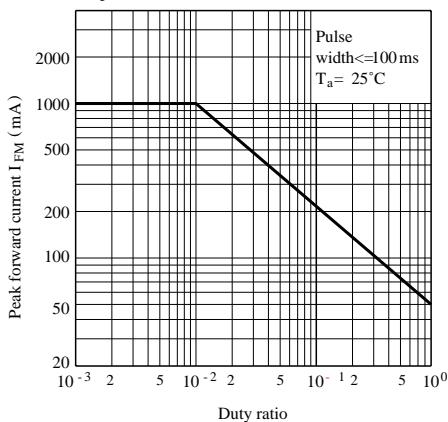


**Fig. 4 Forward Current vs.  
Forward Voltage**

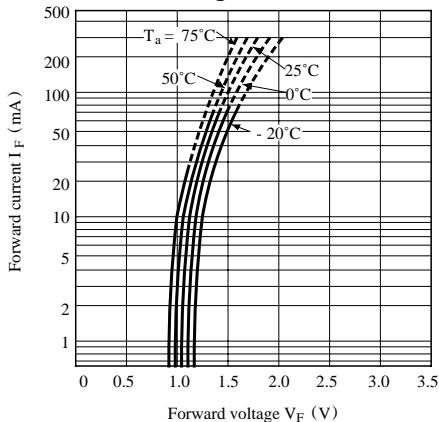


**Fig. 5 Collector Current vs.  
Forward Current**

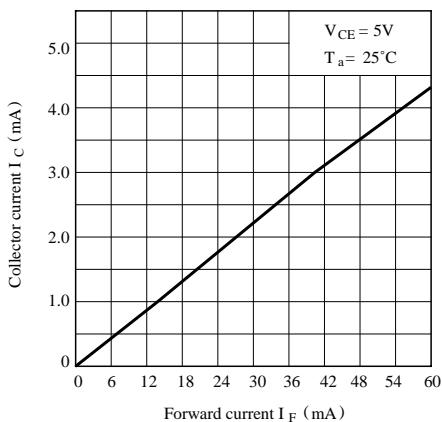


**Fig. 6 Collector Current vs.  
Collector-emitter Voltage**

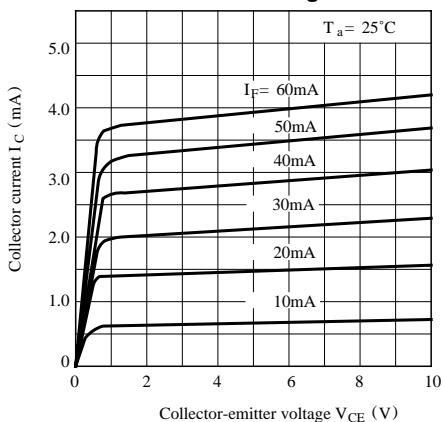


**Fig. 7 Collector Current vs.  
Ambient Temperature**

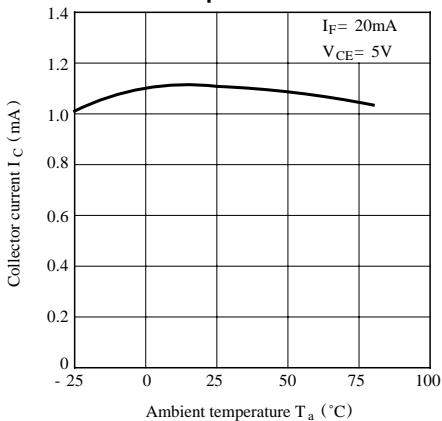


**Fig. 8 Collector-emitter Saturation Voltage vs.  
Ambient Temperature**

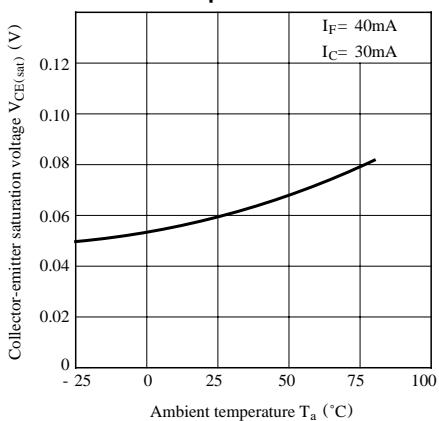


**Fig. 9 Response Time vs.  
Load Resistance**

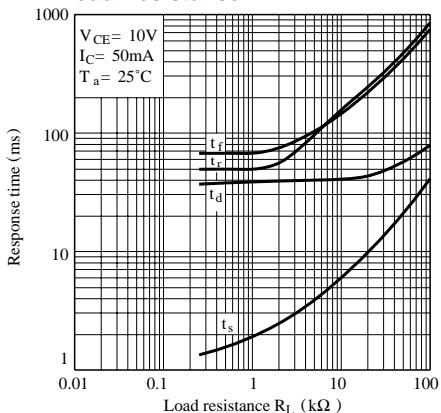

**Fig.10 Collector Dark Current vs.  
Ambient Temperature**

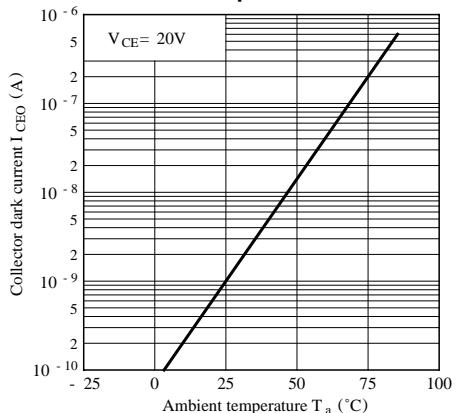

**Fig.11 Relative Collector Current vs.  
Shield Distance (1) (GP1S38)**

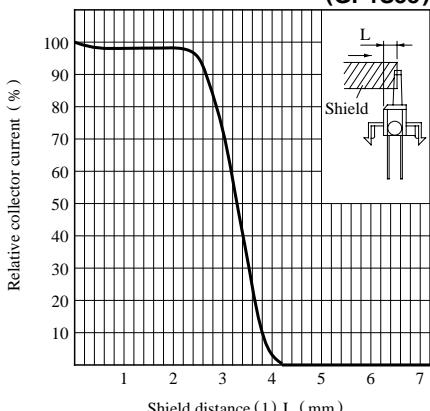

**Fig.12 Relative Collector Current vs.  
Shield Distance (2) (GP1S38)**

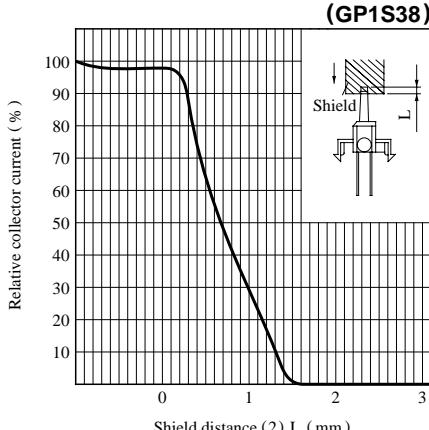


Fig.13 Relative Collector Current vs.  
Shield Distance (1)


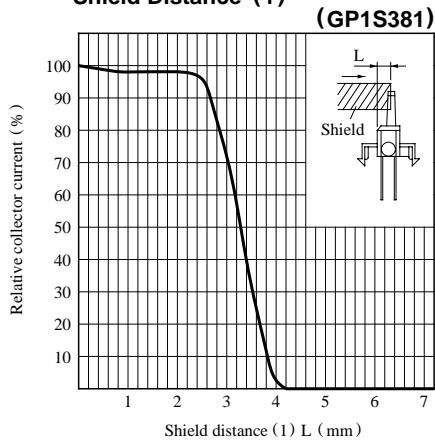


Fig.14 Relative Collector Current vs.  
Shield Distance (2)

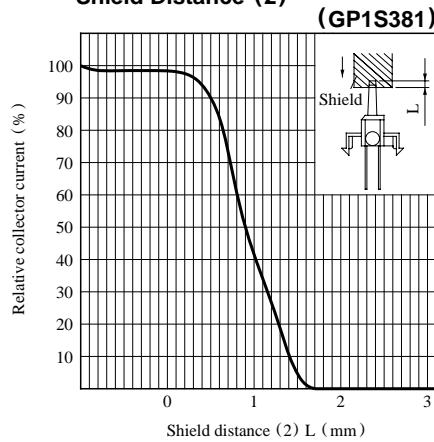

- Please refer to the chapter “Precautions for Use”.