

MGF0953P

L & S BAND GaAs FET [Plastic Mold Lead-less PKG]

DESCRIPTION

The MGF0953P GaAs FET with an N-channel schottky gate, is designed for use L & S band amplifiers.

FEATURES

- High output power
Po = 28.0dBm(TYP.) @f=2.15GHz,Pin=10dBm
- High linear power gain
GLP = 16.5dB(TYP.) @f=2.15GHz
- High power added efficiency
PAE = 40%(TYP.) @f=2.15GHz,Pin=10dBm
- Plastic Mold Lead-less PKG

APPLICATION

- For L & S band amplifiers

QUALITY GRADE

- GG

RECOMMENDED BIAS CONDITIONS

VDS = 10 (V)
ID = 0.15 (A)
RG = 1000 Ohm (MAX)

PACKAGING

Tape & Reel (1.5K/Reel)

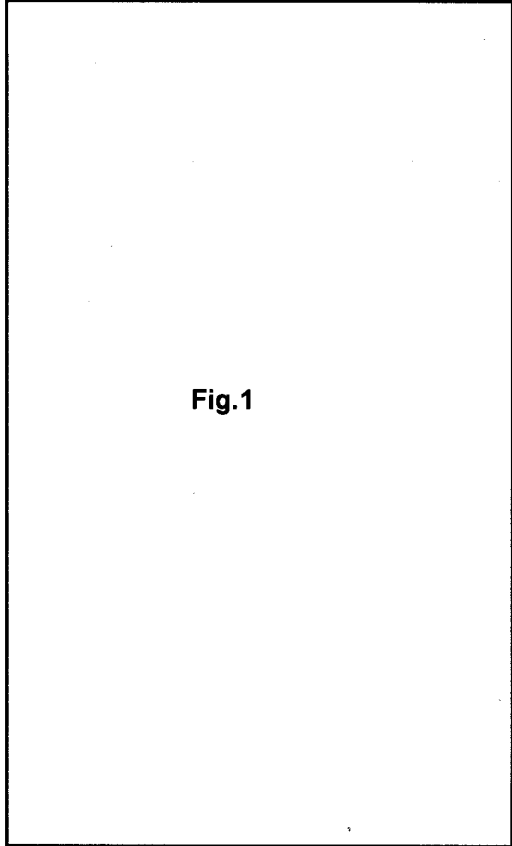


Fig.1

ABSOLUTE MAXIMUM RATINGS

(Ta=25deg.C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain voltage	-15	V
VGSO	Gate to source voltage	-15	V
ID	Drain current	0.4	A
IGR	Reverse gate current	-1.25	mA
IGF	Forward gate current	5	mA
PT *1	Total power dissipation	6.25	W
Tch	Channel temperature	150	deg.C
Tstg	Storage temperature	-40 to +150	deg.C

*1 : Tc=25deg.C

< Keep safety first in your circuit designs! >

Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1) placement of substitutive, auxiliary circuits, (2) use of non-flammable material or (3) prevention against any malfunction or mishap.

ELECTRICAL CHARACTERISTICS

(Ta=25deg.C)


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
Vgs(off)	Gate to source cut-off voltage	VDS=3V, ID=0.1mA	-2.0	--	-5.0	V
Po *1	Output Power	VDS=10V, ID(Rfoff)=0.15A, f=2.15GHz	26	28	--	dBm
PAE *1	Power added Efficiency		--	40	--	%
GLP *2	Linear power gain	*2 : Pin=0dBm	16.5	18.0	--	dB
Rth (Ch-C)	Thermal resistance	Channel to Case	--	14	20	deg.C/W



MITSUBISHI
ELECTRIC

TYPICAL CHARACTERISTICS

VD=10V, Idq=0.15A

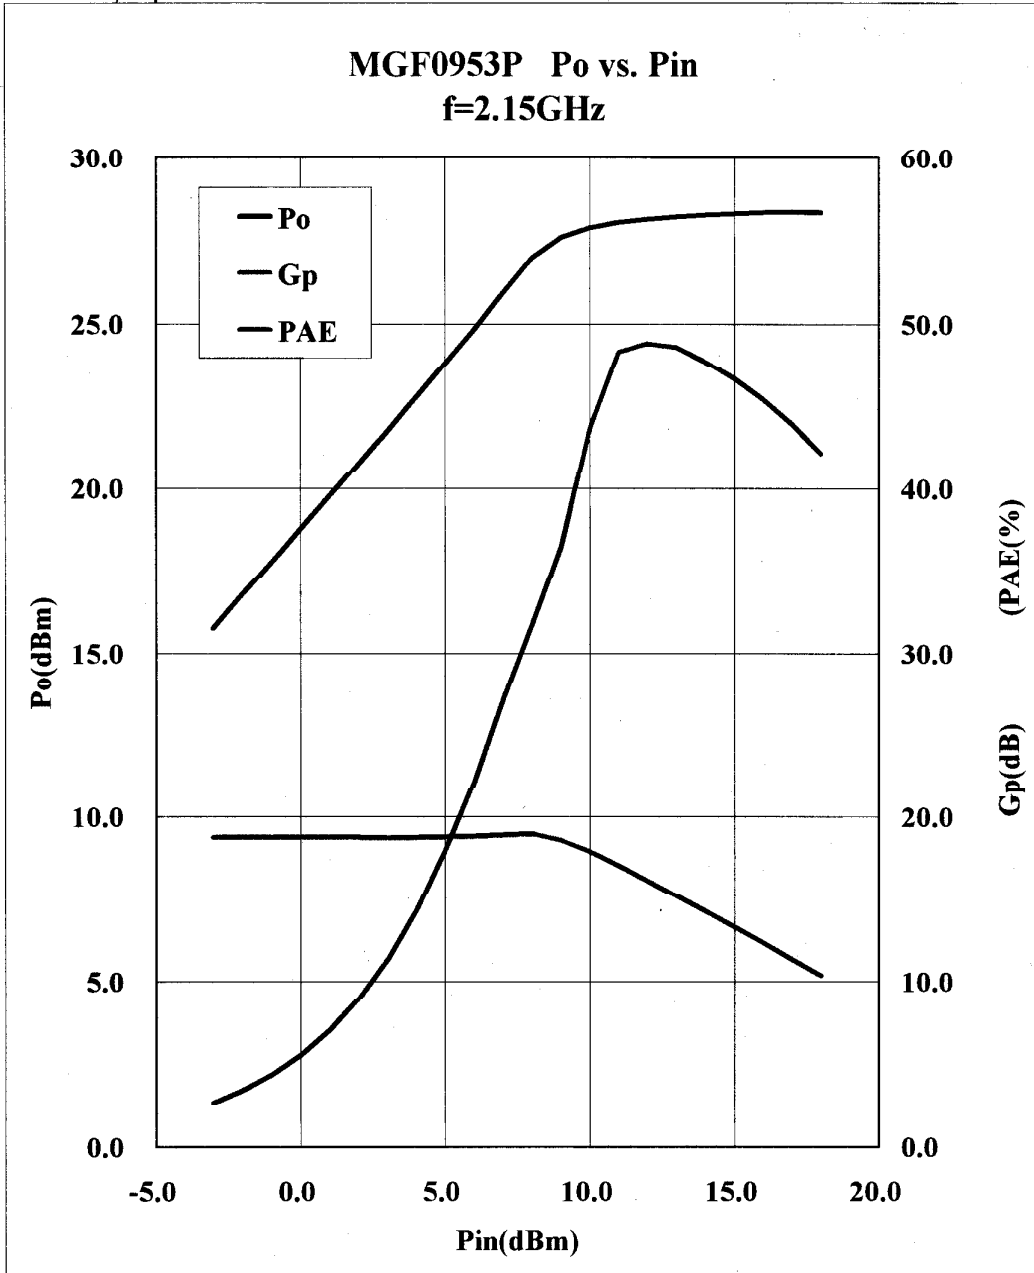


MITSUBISHI
ELECTRIC

TYPICAL CHARACTERISTICS

S PARAMETERS (Ta=25deg.C,VDS=10V,ID=0.15A)

freq (GHz)	S11		S21		S12		S22		K	MSG/MAG (dB)
	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)	(mag)	(ang)		
0.60	0.966	-52.1	6.046	143.4	0.031	55.5	0.266	-61.3	0.09	22.8
0.80	0.941	-66.3	5.525	133.3	0.038	47.3	0.290	-73.4	0.15	21.6
1.00	0.931	-77.5	5.068	124.9	0.043	40.5	0.314	-82.8	0.14	20.7
1.20	0.923	-87.8	4.650	117.3	0.047	33.7	0.331	-88.9	0.16	20.0
1.40	0.943	-95.7	4.306	111.1	0.051	28.6	0.350	-93.6	0.05	19.3
1.60	0.934	-103.0	4.031	104.4	0.052	22.6	0.377	-97.3	0.07	18.9
1.80	0.939	-110.0	3.751	98.1	0.055	17.7	0.393	-101.3	0.04	18.3
2.00	0.917	-115.3	3.446	93.4	0.056	13.6	0.404	-103.9	0.13	17.9
2.20	0.903	-120.1	3.221	89.3	0.057	10.3	0.413	-104.6	0.20	17.5
2.40	0.905	-127.8	2.952	83.3	0.056	5.7	0.417	-110.0	0.22	17.2
2.60	0.900	-131.8	2.816	79.3	0.058	2.8	0.435	-111.7	0.23	16.9
2.80	0.897	-135.3	2.666	75.7	0.059	-1.0	0.449	-113.1	0.25	16.6
3.00	0.882	-138.0	2.521	71.5	0.059	-4.4	0.460	-116.3	0.35	16.3
3.20	0.875	-141.2	2.424	67.6	0.059	-7.4	0.479	-117.9	0.38	16.1
3.40	0.871	-143.6	2.316	64.0	0.059	-10.4	0.493	-120.1	0.42	15.9
3.60	0.860	-147.2	2.221	60.0	0.060	-13.7	0.512	-122.6	0.47	15.7
3.80	0.857	-150.2	2.120	56.5	0.059	-17.6	0.518	-124.9	0.52	15.5
4.00	0.852	-152.5	2.031	53.3	0.059	-20.2	0.528	-127.1	0.57	15.3
4.20	0.856	-155.1	1.965	49.5	0.059	-23.4	0.547	-128.6	0.57	15.2
4.40	0.857	-157.3	1.896	46.3	0.059	-24.6	0.560	-130.2	0.57	15.1
4.60	0.851	-159.5	1.840	43.1	0.059	-26.8	0.574	-132.0	0.60	14.9
4.80	0.851	-161.5	1.793	40.0	0.060	-28.2	0.589	-132.9	0.60	14.7
5.00	0.843	-163.4	1.750	37.1	0.061	-30.1	0.598	-133.6	0.64	14.6

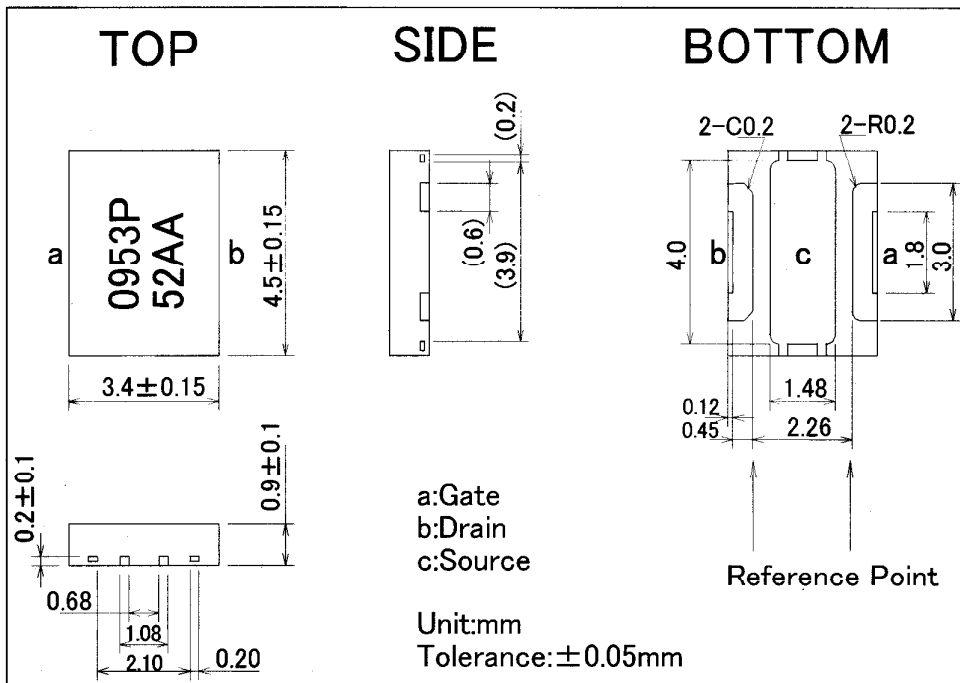

**MITSUBISHI
ELECTRIC**

Requests Regarding Safety Designs

Mitsubishi Electric constantly strives to raise the level of its quality and reliability. Despite these concerted efforts, however, there will be occasions when our semiconductor products suffer breakdowns, malfunctions or other problems. In view of this reality, it is requested that every feasible precaution be taken in the pursuit of redundancy design, malfunction prevention design and other safety-related designs, to prevent breakdowns or malfunctions in our products from resulting in accidents involving people, fires, social losses or other problems, thereby upholding the highest levels of safety in the products when in use by customers.

Matters of Importance when Using these Materials

1. These materials are designed as reference materials to ensure that all customers purchase Mitsubishi Electric semiconductors best suited to their specific use applications. Please be aware, however, that the technical information contained in these materials does not comprise consent for the execution or use of intellectual property rights or other rights owned by Mitsubishi Electric Corporation.
2. Mitsubishi Electric does not assume responsibility for damages resulting from the use of product data, graphs, charts, programs, algorithms or other applied circuit examples described in these materials, or for the infringement of the rights of third-party owners resulting from such use.
3. The data, graphs, charts, programs, algorithms and all other information described in these materials were current at the issue of these materials, with Mitsubishi Electric reserving the right to make any necessary updates or changes in the products or specifications in these materials without prior notice. Before purchasing Mitsubishi Electric semiconductor products, therefore, please obtain the latest available information from Mitsubishi Electric directly or an authorized dealer.
4. Every possible effort has been made to ensure that the information described in these materials is fully accurate. However, Mitsubishi Electric assumes no responsibility for damages resulting from inaccuracies occurring within these materials.
5. When using the product data, technical contents indicated on the graphs, charts, programs or algorithms described in these materials, assessments should not be limited to only the technical contents, programs and algorithm units. Rather, it is requested that ample evaluations be made of each individual system as a whole, with the customer assuming full responsibility for decisions on the propriety of application. Mitsubishi Electric does not accept responsibility for the propriety of application.
6. The products described in these materials, with the exception of special mention concerning use and reliability, have been designed and manufactured with the purpose of use in general electronic machinery. Accordingly these products have not been designed and manufactured with the purpose of application in machinery or systems that will be used under conditions that can affect human life, or in machinery or systems used in social infrastructure that demand a particularly high degree of reliability. When considering the use of the products described in these materials in transportation machinery (automobiles, trains, vessels), for objectives related to medical treatment, aerospace, nuclear power control, submarine repeaters or systems or other specialized applications, please consult with Mitsubishi Electric directly or an authorized dealer.
7. When considering use of products for purposes other than the specific applications described in these materials, please inquire at Mitsubishi Electric or an authorized dealer.
8. The prior consent of Mitsubishi Electric in writing is required for any reprinting or reproduction of these materials.
9. Please direct any inquiries regarding further details of these materials, or any other comments or matters of attention, to Mitsubishi Electric or an authorized dealer.



MITSUBISHI
ELECTRIC