


**PHASE NOISE (1 Hz BW, typical)**

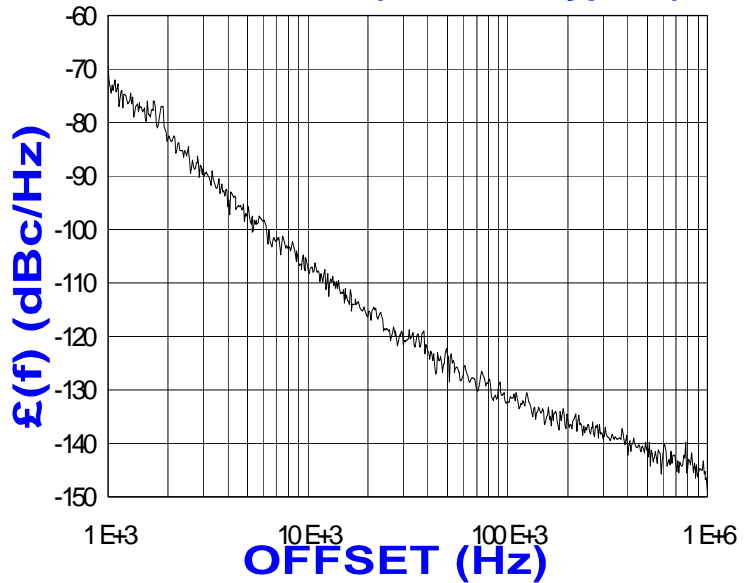

**FEATURES**

- Frequency Range: 3205 - 3235 MHz
- Step Size: 125 KHz
- PLL-24H - Style Package

**APPLICATIONS**

- Digital Radio Equipment
- Fixed Wireless Access
- Satellite Communication Systems

**PERFORMANCE SPECIFICATIONS**

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Frequency Range	3205 - 3235	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-107	dBc/Hz
Harmonic Suppression (2nd, typ.)	-12	dBc
Sideband Spurs (typ.)	-70	dBc
Power Output	0±3	dBm
Load Impedance	50	$\Omega$
Step Size	125	KHz
Charge Pump Output Current	5000	$\mu$ A
Switching Speed (typ., adjacent channel)	3	mSec
Startup Lock Time (typ.)	1	mSec
Operating Temperature Range	-40 to 85	$^{\circ}$ C
Package Style	PLL-24H	

**POWER SUPPLY REQUIREMENTS**

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	35	mA

All specifications are typical unless otherwise noted and subject to change without notice.


**APPLICATION NOTES**

- AN-107 : How to Solder Z-COMM VCOs / PLLs
- AN-200 : Mounting and Grounding of Z-COMM PLLs
- AN-201 : PLL Fundamentals      AN-202 : PLL Functional Description


**NOTES:**

Reference Oscillator Signal:  $5 \text{ MHz} < f_{\text{osc}} < 100 \text{ MHz}$       Prescaler: 32  
 Frequency Synthesizer: Analog Devices - ADF4106


**VCO TUNING CURVE, typ.**

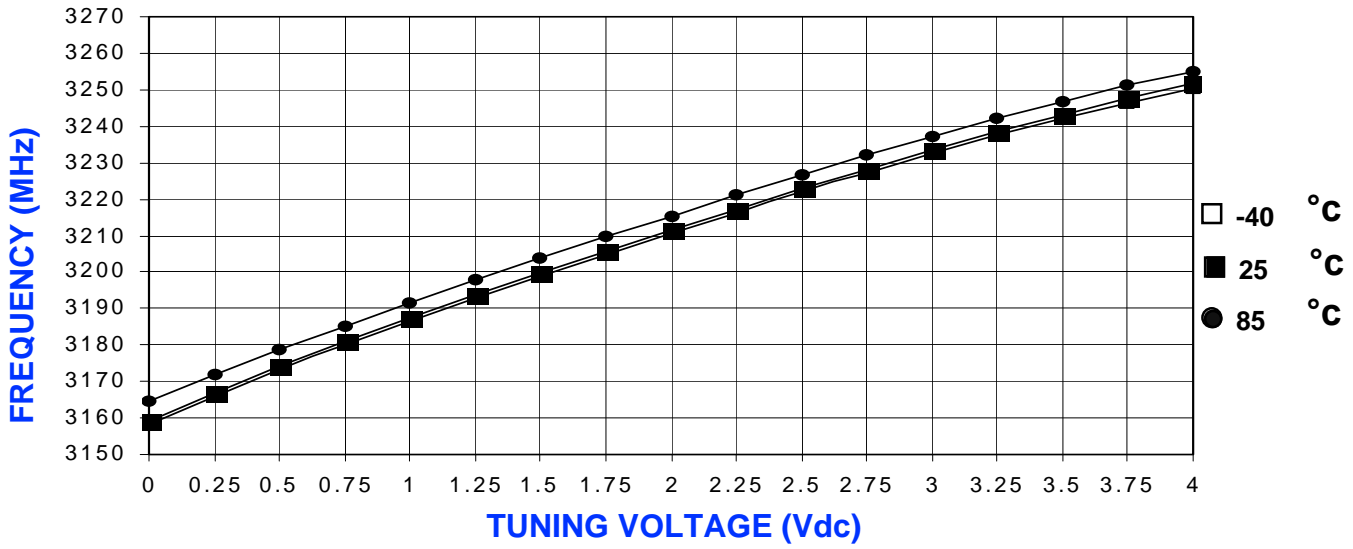

**VCO POWER CURVE, typ.**

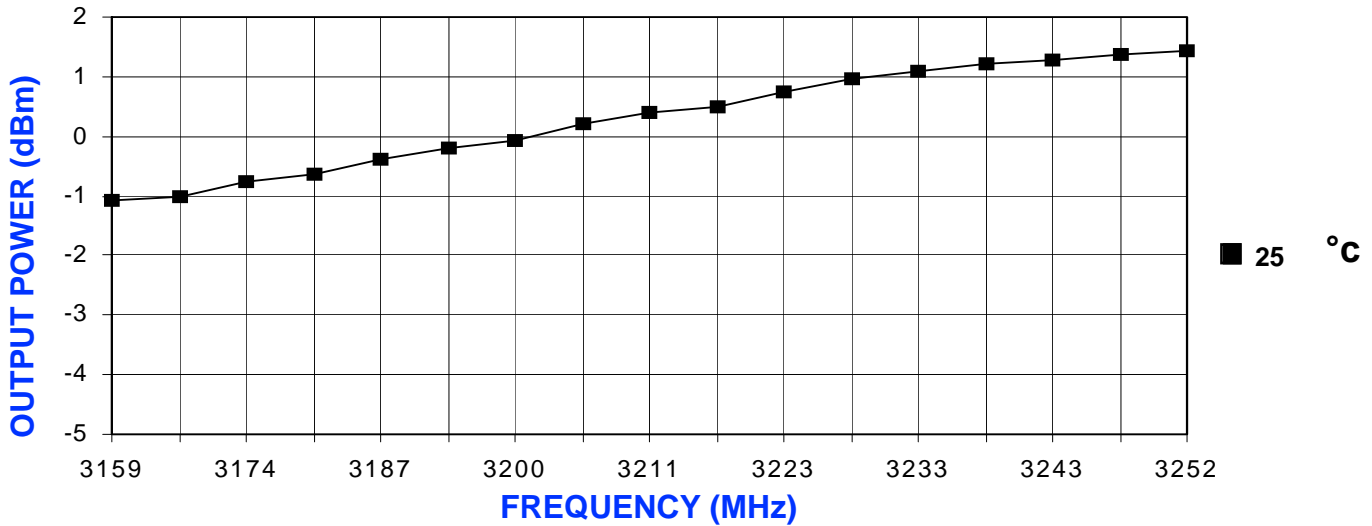

**PHYSICAL DIMENSIONS**

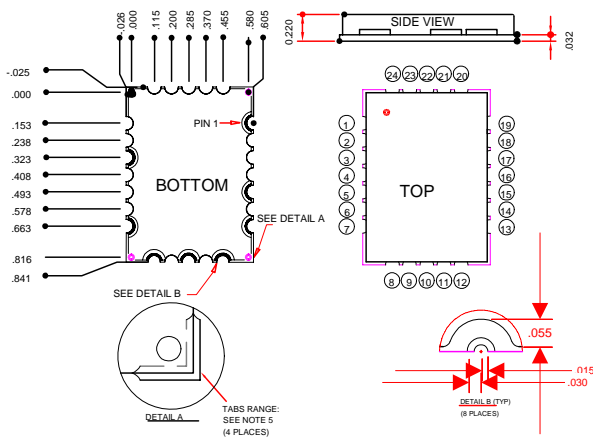

1. The inside radius of all 24 half holes at the perimeter of the board are plated to provide a surface for the attachment of the PLL Module to the PCB. 16 pads are for grounding, 8 pads are for signal interface.
2. The surface of the shield is tin-plated and may be soldered to. The shield's base metal is cold-rolled steel.
3. The ground plane on the bottom side is ground and attaches to a ground track on the top side of the board as well as to the shield.
4. Unless otherwise noted all dimensions are in inches.
5. Unless otherwise noted all tolerances are as follows:  
.xxx = ± .010.

- P1 RF OUTPUT
- P2-4 GROUND
- P5 REFERENCE OSCILLATOR INPUT
- P6 GROUND
- P7 CLOCK
- P8 DATA
- P9 GROUND
- P10 LOAD ENABLE
- P11 GROUND
- P12 LOCK DETECT
- P13 VCC
- P14 GROUND
- P15 GROUND
- P16 GROUND
- P17 NO CONNECTION
- P18-24 GROUND