

# TC75S58AFE, TC75S58AFC


## Single Comparator (Open-Drain Output)

The TC75S58AFE and TC75S58AFC are CMOS general-purpose single comparators. The devices can operate from a single supply voltage and are designed for a lower supply-current than conventional general-purpose bipolar comparators. The output is designed for Open-Drain Output and can supply a higher voltage than the power supply. Therefore, it is possible to pull-up the voltage to a level higher than that of the power supply. The Open-Drain Output can be wired-OR with another Open-Drain Output circuit.

\* Output voltage should not exceed the maximum rating

### Feature


- Low Supply Current:  $I_{DD} = 10 \mu A$  (Typ.)
- Single Power Supply Operation
- Wide Common Mode Input :  $V_{SS} \sim V_{DD} - 0.9 V$
- Open-Drain Output Circuit
- Low Input Bias Current
- Small Package

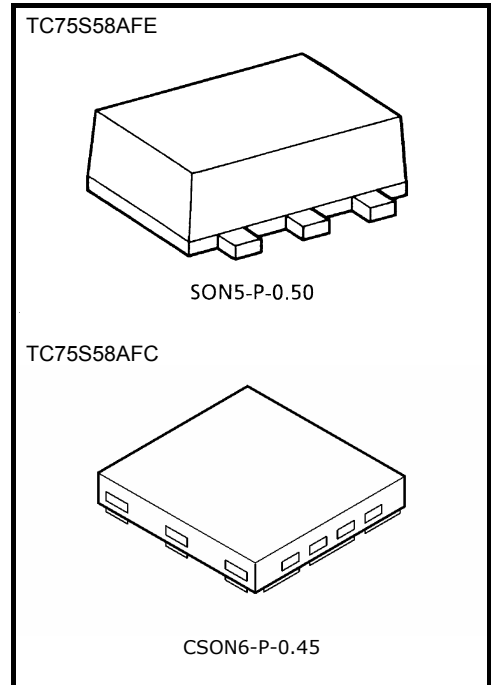


Weight  
 SON5-P-0.50 : 0.003 g (Typ.)  
 CSON6-P-0.45 : 0.002 g (Typ.)

### Marking (top view)

TC75S58AFE




TC75S58AFC

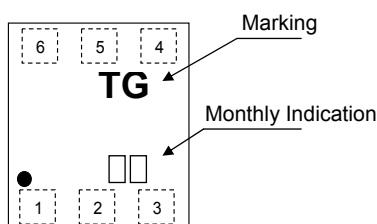


### Pin Assignment (top view)

TC75S58AFE



TC75S58AFC



## Absolute Maximum Ratings (Ta = 25°C)

| Characteristics            | Symbol                            | Rating                                | Unit        |    |
|----------------------------|-----------------------------------|---------------------------------------|-------------|----|
| Supply Voltage             | V <sub>DD</sub> , V <sub>SS</sub> | ±3.5 or 7                             | V           |    |
| Differential Input Voltage | DV <sub>IN</sub>                  | ±7                                    | V           |    |
| Input Voltage              | V <sub>IN</sub>                   | V <sub>SS</sub> ~V <sub>DD</sub>      | V           |    |
| Output Current             | I <sub>O</sub>                    | ±35                                   | mA          |    |
| Output Voltage             | V <sub>O</sub>                    | V <sub>SS</sub> ~ V <sub>SS</sub> + 7 | V           |    |
| Power Dissipation          | P <sub>D</sub>                    | TC75S58AFE                            | 100         | mW |
|                            |                                   | TC75S58AFC                            | 100 (Note1) |    |
| Operating Temperature      | T <sub>opr</sub>                  | -40~85                                | °C          |    |
| Storage Temperature        | T <sub>stg</sub>                  | -55~125                               | °C          |    |

Note: Due to the CMOS structure, this device may be susceptible to latch-up . To prevent latch-up, please take the following precautions;

- Ensure that no I/O pin's voltage level ever exceeds V<sub>dd</sub> or drops below V<sub>ss</sub>. In addition, check the power-on timing.
- Do not subject the device to excessive noise.

(Note 1) : FR4 in board implementation

(25.4mm × 25.4mm × 1.6t, Cu Pad: 0.4mm<sup>2</sup>)



## Electrical Characteristics ( $V_{DD} = 5\text{ V}$ , $V_{SS} = \text{GND}$ , $T_a = 25^\circ\text{C}$ )




| Characteristics                | Symbol        | Test Circuit | Test Condition                             | Min. | Typ.    | Max.    | Unit          |
|--------------------------------|---------------|--------------|--|------|---------|---------|---------------|
| Input Offset Voltage           | $V_{IO}$      | —            | —  | —    | $\pm 1$ | $\pm 7$ | mV            |
| Input Offset Current           | $I_{IO}$      | —            | —  | —    | 1       | —       | pA            |
| Input Bias Current             | $I_I$         | —            | —  | —    | 1       | —       | pA            |
| Common Mode Input Voltage      | $CMV_{IN}$    | —            | —  | 0    | —       | 4.1     | V             |
| Supply Current                 | $I_{DD}$ (注)  | —            | —  | —    | 11      | 22      | $\mu\text{A}$ |
| Voltage Gain                   | $G_V$         | —            | —  | —    | 94      | —       | dB            |
| Sink Current                   | $I_{sink}$    | —            | $V_{OL} = 0.5\text{ V}$                    | 13   | 25      | —       | mA            |
| Output Leakage Current         | $I_{LEAK}$    | —            | $V_{DD} = 5\text{ V}$ , $V_O = 5\text{ V}$ | —    | 5       | —       | nA            |
| Off-State Leakage Current      | $I_{OFF}$     | —            | $V_{DD} = 0\text{ V}$ , $V_O = 5\text{ V}$ | —    | 5       | —       | nA            |
| Output-Low Voltage             | $V_{OL}$      | —            | $I_{sink} = 5.0\text{ mA}$                 | —    | 0.1     | 0.3     | V             |
| Operating Supply Voltage Range | $V_{DD}$      | —            | —  | 1.8  | —       | 7.0     | V             |
| Propagation Delay (Turn On)    | $t_{PLH}$ (1) | —            | Over Drive = 100 mV                        | —    | 800     | —       | ns            |
|                                | $t_{PLH}$ (2) | —            | TTL Step Input                             | —    | 620     | —       |               |
| Propagation Delay (Turn Off)   | $t_{PHL}$ (1) | —            | Over Drive = 100 mV                        | —    | 230     | —       | ns            |
|                                | $t_{PHL}$ (2) | —            | TTL Step Input                             | —    | 350     | —       |               |
| Response Time                  | $t_{TLH}$     | —            | Over Drive = 100 mV                        | —    | 190     | —       | ns            |
|                                | $t_{THL}$     | —            | Over Drive = 100 mV                        | —    | 6       | —       |               |

## Electrical Characteristics ( $V_{DD} = 3\text{ V}$ , $V_{SS} = \text{GND}$ , $T_a = 25^\circ\text{C}$ )

| Characteristics              | Symbol          | Test Circuit | Test Condition                             | Min. | Typ.    | Max.    | Unit          |
|------------------------------|-----------------|--------------|--|------|---------|---------|---------------|
| Input Offset Voltage         | $V_{IO}$        | —            | —  | —    | $\pm 1$ | $\pm 7$ | mV            |
| Input Offset Current         | $I_{IO}$        | —            | —  | —    | 1       | —       | pA            |
| Input Bias Current           | $I_I$           | —            | —  | —    | 1       | —       | pA            |
| Common Mode Input Voltage    | $CMV_{IN}$      | —            | —  | 0    | —       | 2.1     | V             |
| Supply Current               | $I_{DD}$ (Note) | —            | —  | —    | 10      | 20      | $\mu\text{A}$ |
| Sink Current                 | $I_{sink}$      | —            | $V_{OL} = 0.5\text{ V}$                    | 6    | 18      | —       | mA            |
| Output Leakage Current       | $I_{LEAK}$      | —            | $V_{DD} = 3\text{ V}$ , $V_O = 3\text{ V}$ | —    | 5       | —       | nA            |
| Off-State Leakage Current    | $I_{OFF}$       | —            | $V_{DD} = 0\text{ V}$ , $V_O = 3\text{ V}$ | —    | 5       | —       | nA            |
| Output-Low Voltage           | $V_{OL}$        | —            | $I_{sink} = 5.0\text{ mA}$                 | —    | 0.15    | 0.35    | V             |
| Propagation Delay (Turn On)  | $t_{PLH}$       | —            | Over Drive = 100 mV                        | —    | 590     | —       | ns            |
| Propagation Delay (Turn Off) | $t_{PHL}$       | —            | Over Drive = 100 mV                        | —    | 230     | —       | ns            |
| Response Time                | $t_{TLH}$       | —            | Over Drive = 100 mV                        | —    | 170     | —       | ns            |
|                              | $t_{THL}$       | —            | Over Drive = 100 mV                        | —    | 5       | —       |               |

Note: The current consumption of this device increases as its operating frequency increases. Note that the power dissipation should not exceed the allowable power.

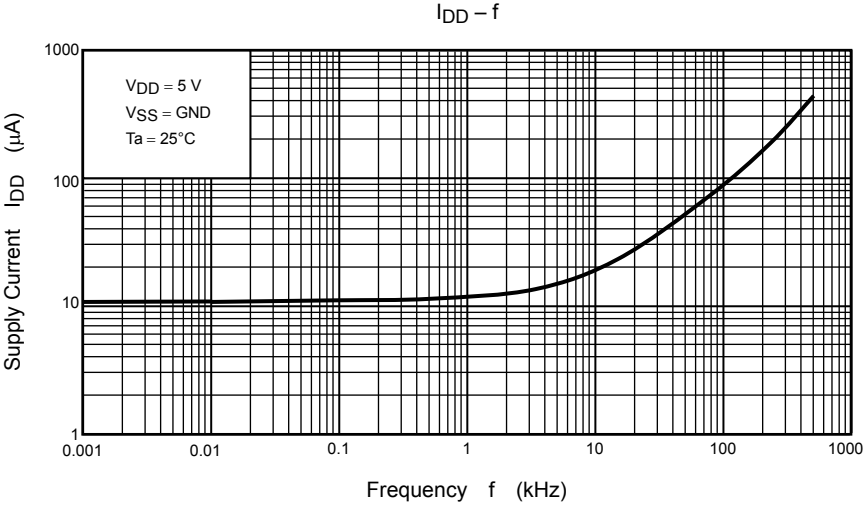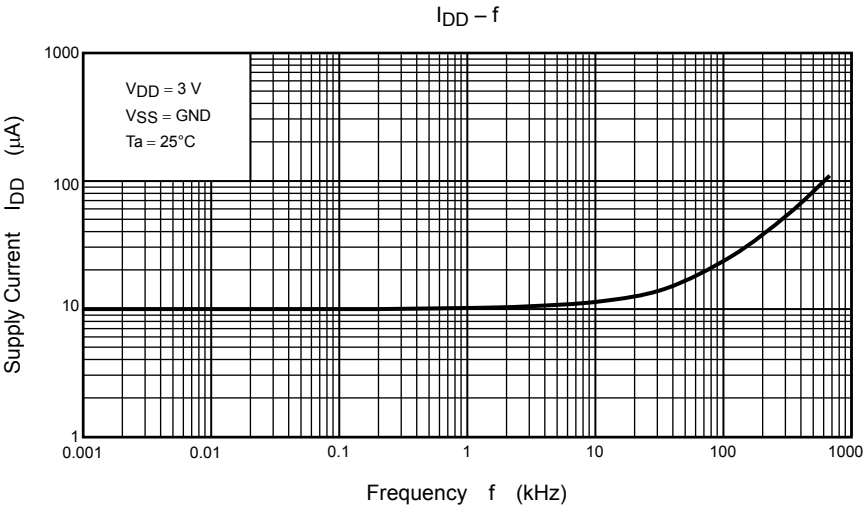


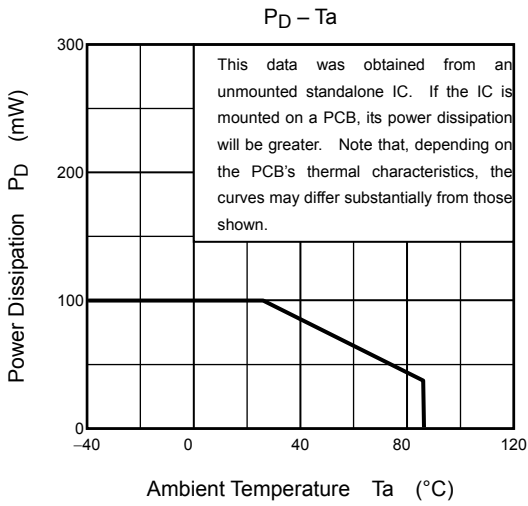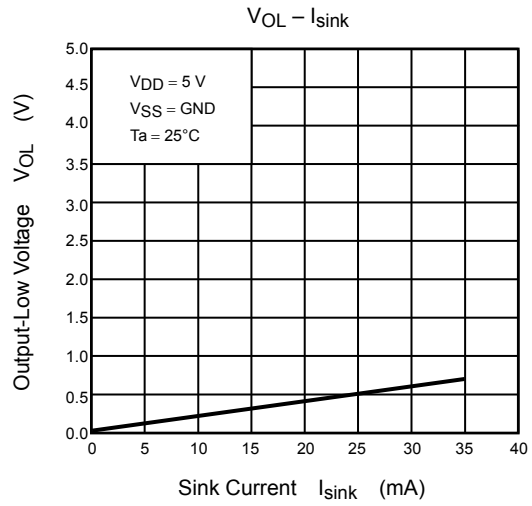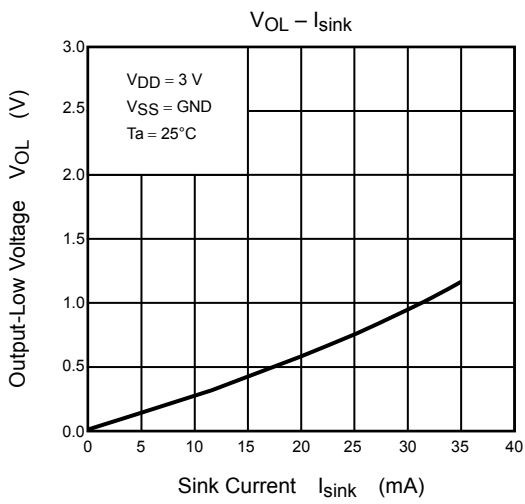

**Package Dimension**

SON5-P-0.50

Unit : mm

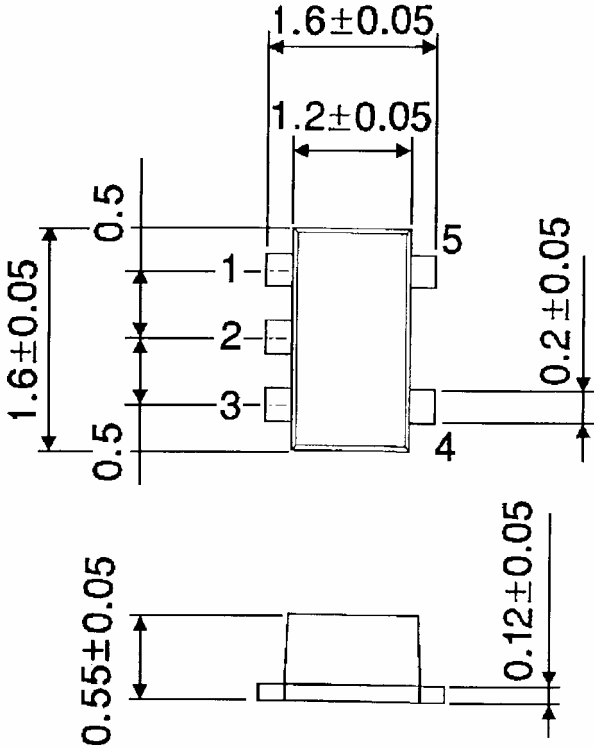

Weight: 0.003 g (Typ.)



**RESTRICTIONS ON PRODUCT USE**

20070701-EN

- The information contained herein is subject to change without notice.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc.
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document shall not be used or embedded to any downstream products of which manufacture, use and/or sale are prohibited under any applicable laws and regulations.
- Please contact your sales representative for product-by-product details in this document regarding RoHS compatibility. Please use these products in this document in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances. Toshiba assumes no liability for damage or losses occurring as a result of noncompliance with applicable laws and regulations.