General Description

This Trench MOSFET has better characteristics, such as fast switching time, low on resistance, low gate charge and excellent avalanche characteristics. It is mainly suitable for DC/DC Converter, Synchronous Rectification and a load switch in battery powered applications

FEATURES

· V_{DSS}= 100V, I_D= 95A

· Drain-Source ON Resistance :

$R_{DS(ON)}$=8.6mΩ(Max.) @V_{GS} = 10V

MAXIMUM RATING (Tc=25℃)

CHARACTERISTIC		SYMBOL	RATING		UNIT
			KU086N10P	KU086N10F	
Drain-Source Voltage		V_{DSS}	100		V
Gate-Source Voltage		V_{GSS}	±20		V
Drain Current	@T_C=25℃	I_D	95	50	A
	@T_C=100℃		60	32.5	
	Pulsed (Note1)	I_{DP}	400*		
Single Pulsed Avalanche Energy (Note 2)		E_{AS}	570		mJ
Repetitive Avalanche Energy (Note 1)		E_{AR}	7.1		mJ
Peak Diode Recovery dv/dt (Note 3)		dv/dt	4.5		V/ns
Drain Power Dissipation	Tc=25℃	P_D	167	50	W
	Derate above 25℃		1.33	0.4	W/℃
Maximum Junction Temperature		T_j	150		℃
Storage Temperature Range		T_{stg}	-55 ~ 150		℃
Thermal Characteristics					
Thermal Resistance, Junction-to-Case		R_{thJC}	0.75	2.5	℃/W
Thermal Resistance, Junction-to-Ambient		R_{thJA}	62.5		℃/W

* : Drain current limited by maximum junction temperature.

KU086N10P

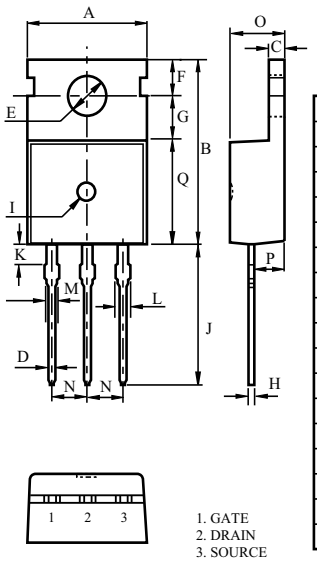

DIM	MILLIMETERS
A	9.9 ± 0.2
B	15.95 MAX
C	1.3+0.1/-0.05
D	0.8 ± 0.1
E	ø3.6 ± 0.2
F	2.8 ± 0.1
G	3.7
H	0.5+0.1/-0.05
I	ø1.5
J	13.08 ± 0.3
K	1.46
L	1.4 ± 0.1
M	1.27 ± 0.1
N	2.54 ± 0.2
O	4.5 ± 0.2
P	2.4 ± 0.2
Q	9.2 ± 0.2

TO-220AB

KU086N10F

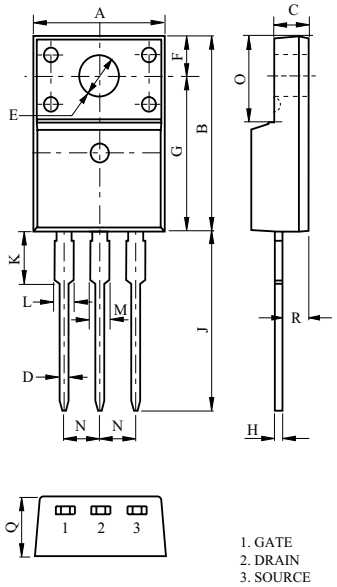

DIM	MILLIMETERS
A	10.16 ± 0.2
B	15.87 ± 0.2
C	2.54 ± 0.2
D	0.8 ± 0.1
E	ø3.18 ± 0.1
F	3.3 ± 0.1
G	12.57 ± 0.2
H	0.5 ± 0.1
J	13.0 ± 0.5
K	3.23 ± 0.1
L	1.47 MAX
M	1.47 MAX
N	2.54 ± 0.2
O	6.68 ± 0.2
Q	4.7 ± 0.2
R	2.76 ± 0.2

TO-220IS (1)

PIN CONNECTION



ELECTRICAL CHARACTERISTICS (Tc=25℃)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	I_D=250 μA, V_{GS}=0V	100	-	-	V
Breakdown Voltage Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_j$	I_D=5mA, Referenced to 25℃	-	0.09	-	V/℃
Drain Cut-off Current	I_{DSS}	V_{DS}=100V, V_{GS}=0V,	-	-	10	μA
Gate Threshold Voltage	V_{th}	V_{DS}=V_{GS}, I_D=250 μA	2.0	-	4.0	V
Gate Leakage Current	I_{GSS}	V_{GS}=±20V, V_{DS}=0V	-	-	±100	nA
Drain-Source ON Resistance	$R_{DS(ON)}$	V_{GS}=10V, I_D=47.5A	-	7.3	8.6	mΩ
Dynamic						
Total Gate Charge	Q_g	V_{DS}=80V, I_D=80A V_{GS}=10V (Note4,5)	-	200	-	nC
Gate-Source Charge	Q_{gs}		-	35	-	
Gate-Drain Charge	Q_{gd}		-	60	-	
Turn-on Delay time	$t_{d(on)}$	V_{DD}=50V I_D=80A R_G=25Ω (Note4,5)	-	120	-	ns
Turn-on Rise time	t_r		-	230	-	
Turn-off Delay time	$t_{d(off)}$		-	520	-	
Turn-off Fall time	t_f		-	200	-	
Input Capacitance	C_{iss}	V_{DS}=25V, V_{GS}=0V, f=1.0MHz	-	8800	-	pF
Output Capacitance	C_{oss}		-	630	-	
Reverse Transfer Capacitance	C_{rss}		-	340	-	
Source-Drain Diode Ratings						
Continuous Source Current	I_S	V_{GS}<V_{th}	-	-	95	A
Pulsed Source Current	I_{SP}		-	-	380	
Diode Forward Voltage	V_{SD}	I_S=95A, V_{GS}=0V	-	-	1.4	V
Reverse Recovery Time	t_{rr}	I_S=80A, V_{GS}=0V, dIs/dt=300A/μs	-	65	-	ns
Reverse Recovery Charge	Q_{rr}		-	0.32	-	μC

Note 1) Repetivity rating : Pulse width limited by junction temperature.

Note 2) L =70 μH, I_S=80A, V_{DD}=80V, R_G=25Ω, Starting T_j=25℃.

Note 3) I_S≤80A, dI/dt≤200A/μs, V_{DD}≤BV_{DSS}, Starting T_j=25℃.

Note 4) Pulse Test : Pulse width ≤ 300μs, Duty Cycle ≤ 2%.

Note 5) Essentially independent of operating temperature.

Marking

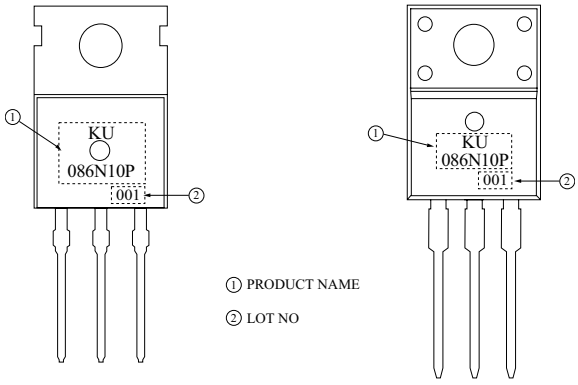

Fig1. I_D - V_{DS}

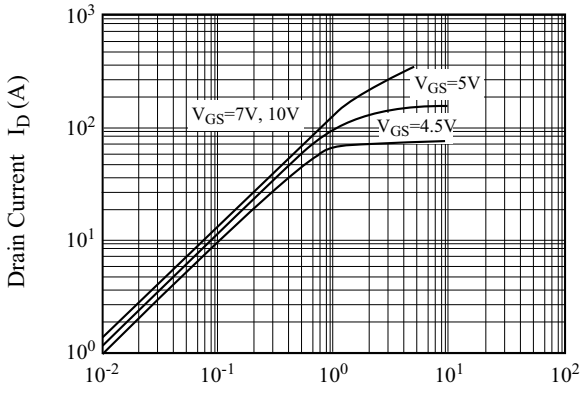

Fig2. I_D - V_{GS}

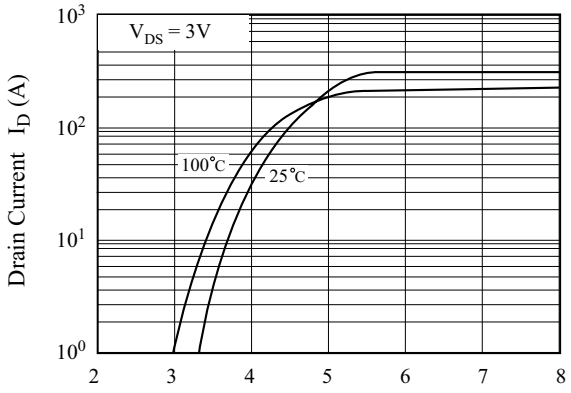

Fig3. BV_{DSS} - T_j

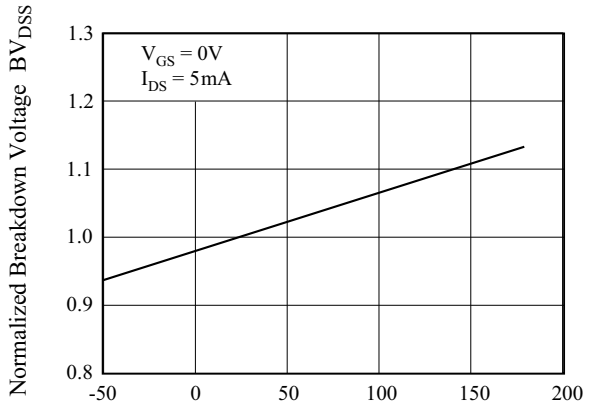

Fig4. $R_{DS(ON)}$ - I_D

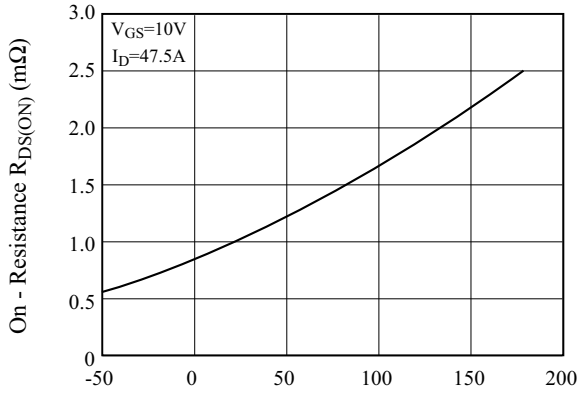

Fig5. I_S - V_{SD} - Ⅰ

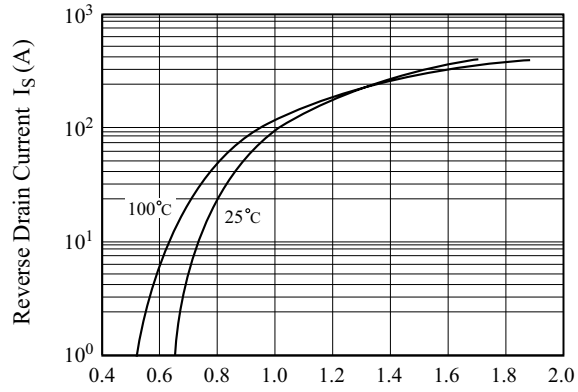

Fig6. I_S - V_{SD} - Ⅱ

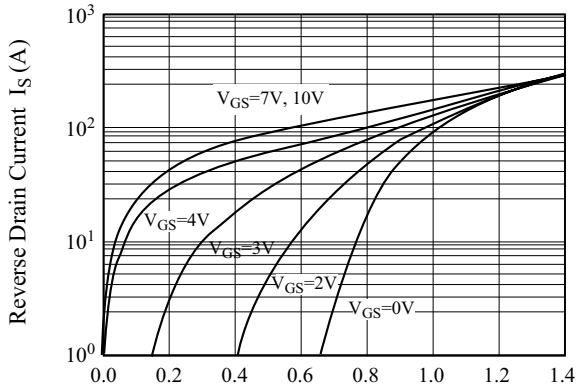

Fig7. $R_{DS(ON)}$ - I_D

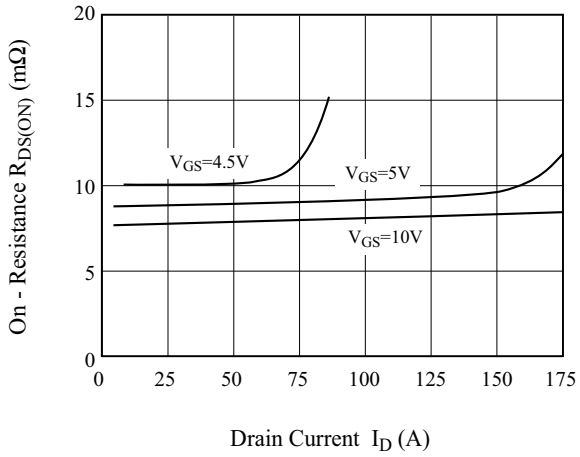

Fig8. I_D- T_j

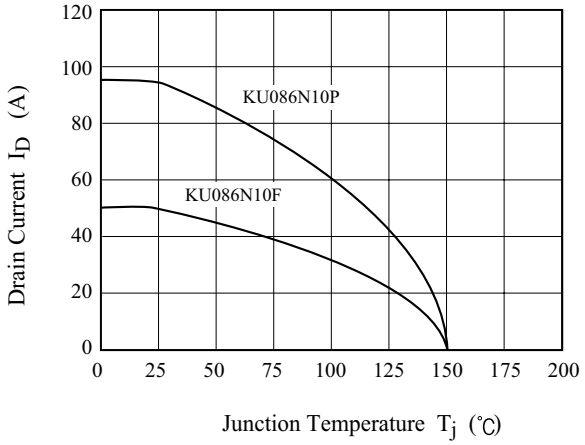

Fig 9. C - V_{DS}

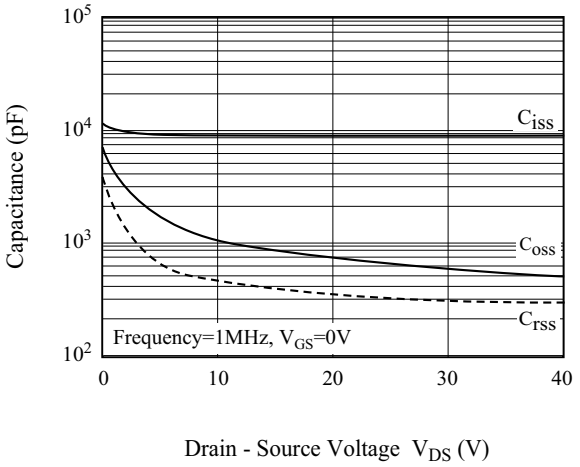

Fig10. Q_g- V_{GS}

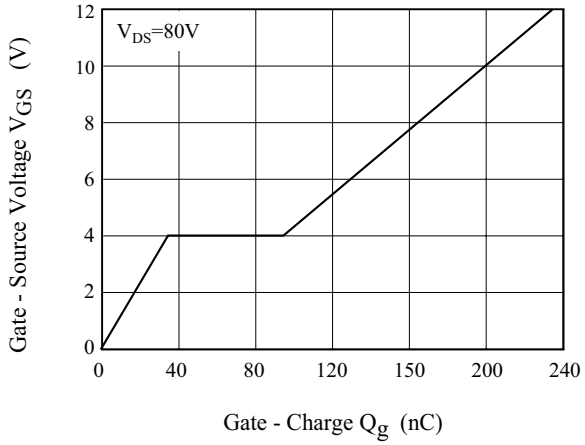

Fig11. Safe Operation Area

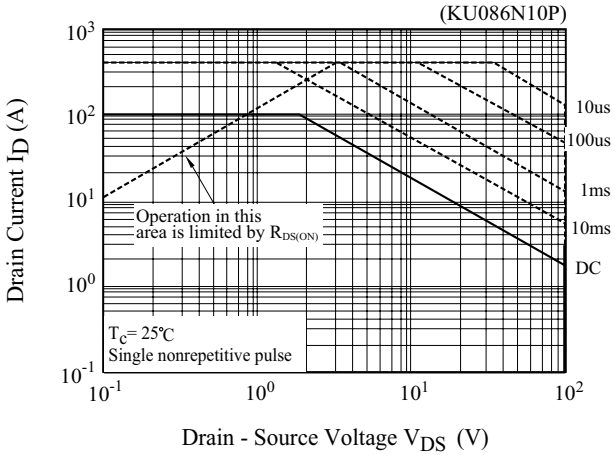

Fig12. Safe Operation Area

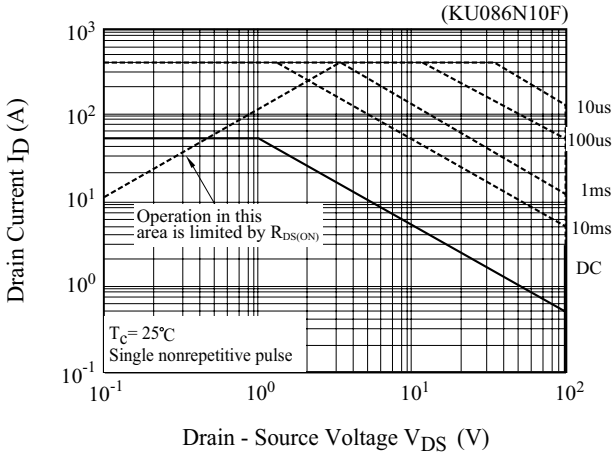

Fig13. Transient Thermal Response Curve

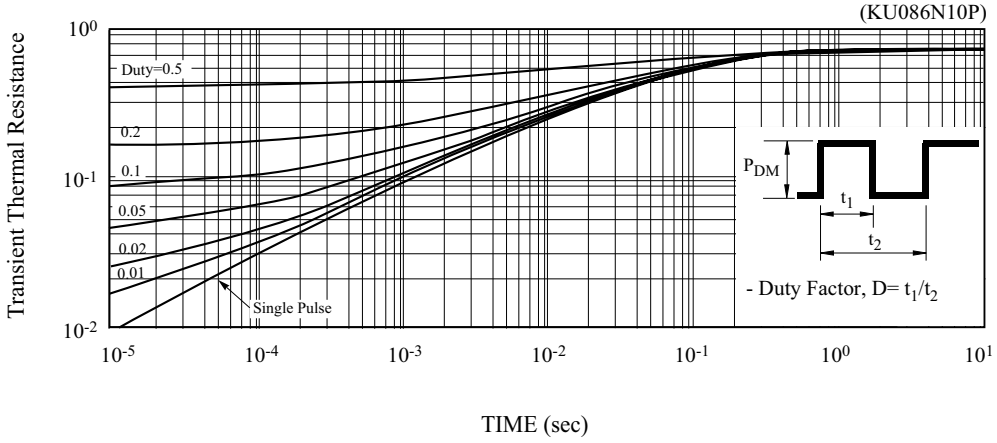

Fig14. Transient Thermal Response Curve

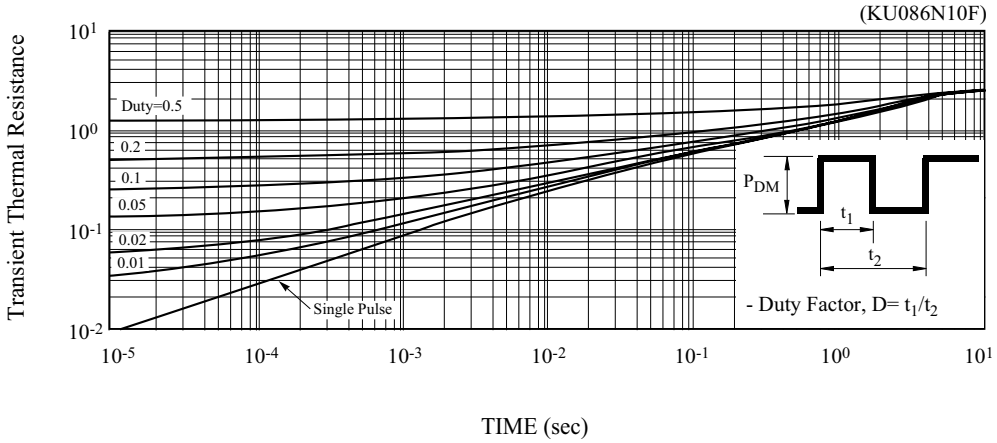

Fig15. Gate Charge

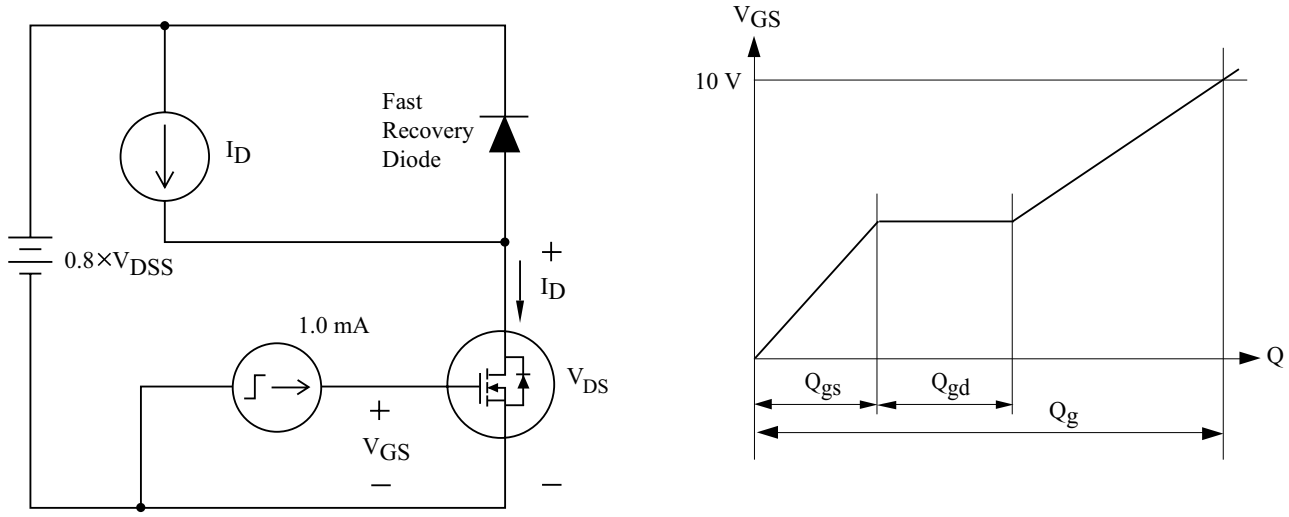

Fig16. Single Pulsed Avalanche Energy

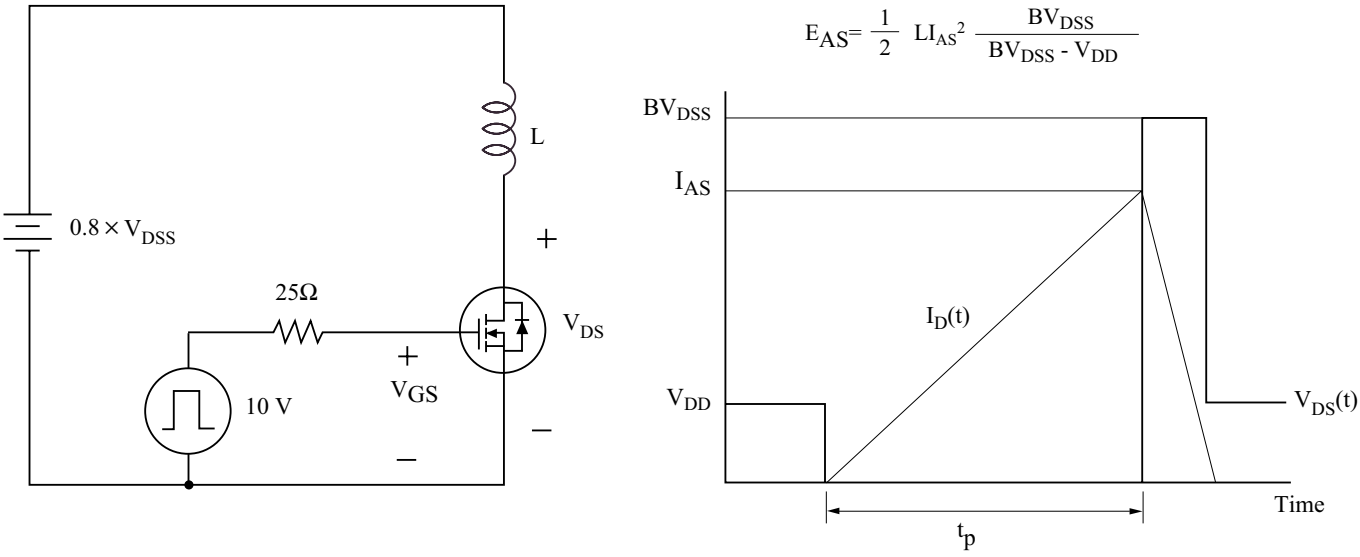

Fig17. Resistive Load Switching

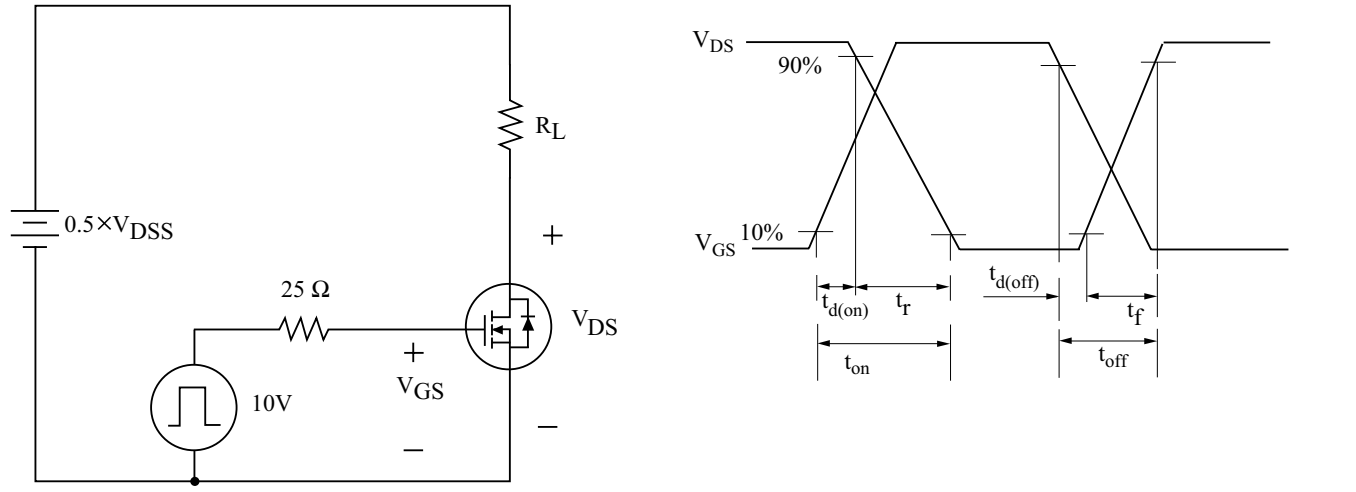

Fig18. Source - Drain Diode Reverse Recovery and dv /dt