

# Quad high-speed differential line receivers

## AM26LS32/ AM26LS33

### DESCRIPTION


The AM26LS32 and AM26LS33 are quad line receivers designed to meet all of the requirements of RS-422 and RS-423 and Federal Standards 1020 and 1030 for balanced and unbalanced digital data transmission.

The AM26LS32 features an input sensitivity of  $\pm 200\text{mV}$  over the common mode input range of  $\pm 7\text{V}$ .

The AM26LS33 features an input sensitivity of  $\pm 500\text{mV}$  over the common mode input voltage range of  $\pm 15\text{V}$ .

The AM26LS32 and AM26LS33 provide an enable and disable function common to all four receivers. Both parts feature 3-State outputs with 8mA sink capability and incorporate a fail-safe input-output relationship which forces the outputs high when the inputs are open.

### PIN CONFIGURATION

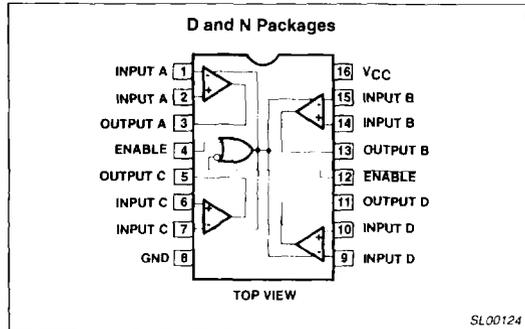

### FEATURES

- Input voltage range of 15V (differential or common mode) on AM26LS33; 7V (differential or common mode) on AM26LS32
- $\pm 0.2\text{V}$  sensitivity over the input voltage range on AM26LS32
- $\pm 0.5\text{V}$  sensitivity on AM26LS33
- 6k $\Omega$  minimum input impedance
- The AM26LS32 meets all the requirements of RS-422 and RS-423

- Operation from single +5V supply
- Fail safe input-output relationship. Output always high when inputs are open
- 3-State drive, with choice of complementary output enables, for receiving directly onto a data bus
- 3-State outputs disabled during power up and power down

### ORDERING INFORMATION

DESCRIPTION	TEMPERATURE RANGE	ORDER CODE	DWG #
16-Pin Plastic Dual In-Line Package (DIP)	0°C to +70°C	AM26LS32CN	SOT28-4
16-Pin Small Outline (SO) Package	0°C to +70°C	AM26LS32CD	SOT109-1
16-Pin Plastic Dual In-Line Package (DIP)	-40°C to +85°C	AM26LS32IN	SOT28-4
16-Pin Small Outline (SO) Package	-40°C to +85°C	AM26LS32ID	SOT109-1
16-Pin Plastic Dual In-Line Package (DIP)	-55°C to +125°C	AM26LS32MN	SOT28-4
16-Pin Plastic Dual In-Line Package (DIP)	0°C to +70°C	AM26LS33CN	SOT28-4
16-Pin Small Outline (SO) Package	0°C to +70°C	AM26LS33CD	SOT109-1
16-Pin Plastic Dual In-Line Package (DIP)	-40°C to +85°C	AM26LS33IN	SOT28-4
16-Pin Small Outline (SO) Package	-40°C to +85°C	AM26LS33ID	SOT109-1
16-Pin Plastic Dual In-Line Package (DIP)	-55°C to +125°C	AM26LS33MN	SOT28-4

### ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	RATING	UNIT
V <sub>CC</sub>	Power supply	7	V
V <sub>IN</sub>	Power supply	7	V
	Output sink current	50	mA
	Common mode range	$\pm 25$	V
V <sub>TH</sub>	Differential input voltage	$\pm 25$	V
T <sub>STG</sub>	Storage temperature range	-65 to +150	°C

### DISSIPATION OPERATING TABLE

PACKAGE	POWER DISSIPATION	DERATING FACTOR	ABOVE T <sub>A</sub>
N	1,275mW	10.2mW/°C	25°C
D	1,262W	10.1mW/°C	25°C

## Quad high-speed differential line receivers

AM26LS32/  
AM26LS33

## DC AND AC ELECTRICAL CHARACTERISTICS

$V_{CC} = 5.0V \pm 10\%$  for AM26LS32/33MX,  $V_{CC} = 5.0V \pm 5\%$  for AM26LS32/33CX and AM26LS32/33IX over operating temperature range unless otherwise specified.

SYMBOL	PARAMETER	TEST CONDITIONS	LIMITS			UNIT	
			AM26LS32/33				
			Min	Typ <sup>1</sup>	Max		
$V_{TH}$	Differential input voltage	$V_{OUT} = V_{OL}$ or $V_{OH}$ AM26LS32, $-7V \leq V_{CM} \leq +7V$	-0.2		0.2	V	
		AM26LS33, $-15V \leq V_{CM} \leq +15V$	-0.5		0.5		
$R_{IN}$	Input resistance	$-15V \leq V_{CM} \leq +15V$ (One input AC ground)	6.0	9.8		k $\Omega$	
$I_{IN}$	Input current (under test)	$V_{IN} = +15V$ Other input $-15V \leq V_{IN} \leq +15V$			2.3	mA	
$I_{IN}$	Input current (under test)	$V_{IN} = -15V$ Other input $+15V \leq V_{IN} \leq -15V$			-2.8	mA	
$V_{OH}$	Output HIGH voltage	$V_{CC} = \text{Min.}$ , $I_{OH} = -440\mu A$ $\Delta V_{IN} = +1.0V$ $V_{ENABLE} = 0.8V$	Com <sup>1</sup>	2.7	3.4	V	
			Mil	2.5	3.4		
$V_{OL}$	Output LOW voltage	$V_{CC} = \text{Min.}$ , $V_{ENABLE} = 0.8V$ $\Delta V_{IN} = +1.0V$	$I_{OL} = 4.0mA$		0.3	0.4	V
			$I_{OL} = 8.0mA$			0.45	
$V_{IL}$	Enable LOW voltage				0.8	V	
$V_{IH}$	Enable HIGH voltage		2.0			V	
$V_I$	Enable clamp voltage	$V_{CC} = \text{Min.}$ , $I_{IN} = -18mA$				-1.5	V
$I_O$	Off state (high impedance) output current	$V_{CC} = \text{Max.}$	$V_O = 2.4V$			20	$\mu A$
			$V_O = 0.4V$			-20	
$I_{IL}$	Enable LOW current	$V_{IN} = 0.4V$		-0.2	-0.36	mA	
$I_{IH}$	Enable HIGH current	$V_{IN} = 2.7V$		0.5	20	$\mu A$	
$I_I$	Enable input HIGH current	$V_{IN} = 5.5V$		1	100	$\mu A$	
$I_{SC}$	Output short circuit current	$V_{CC} = \text{Max.}$ , $\Delta V_{IN} = +1V$ , $V_{OUT} = 0V$	-15	-60	-85	mA	
$I_{CC}$	Power supply current	$V_{CC} = \text{Max.}$ ; All $V_{IN} = \text{GND}$ outputs disabled		52	70	mA	
$V_{HYST}$	Input hysteresis	$T_A = 25^\circ C$ , $V_{CC} = 5.0V$ , $V_{CM} = 0V$	AM26LS32		120		mV
			AM26LS33		120		
$t_{PLH}$	Input to output	$T_A = 25^\circ C$ , $V_{CC} = 5.0V$ $C_L = 15pF$ (see test condition)		10	25	ns	
$t_{PHL}$	Input to output	$T_A = 25^\circ C$ , $V_{CC} = 5.0V$ $C_L = 15pF$ (see test condition)		10	25	ns	
$t_{LZ}$	Enable to output	$T_A = 25^\circ C$ , $V_{CC} = 5.0V$ $C_L = 5pF$ (see test condition)		15	30	ns	
$t_{HZ}$	Enable to output	$T_A = 25^\circ C$ , $V_{CC} = 5.0V$ $C_L = 5pF$ (see test condition)		12	22	ns	
$t_{ZL}$	Enable to output	$T_A = 25^\circ C$ , $V_{CC} = 5.0V$ $C_L = 15pF$ (see test condition)		8	22	ns	
$t_{ZH}$	Enable to output	$T_A = 25^\circ C$ , $V_{CC} = 5.0V$ $C_L = 15pF$		9	22	ns	

## NOTE:

1. All typical values are  $T_A = 25^\circ C$ ,  $V_{CC} = 5.0V$ .

# Quad high-speed differential line receivers


AM26LS32/  
AM26LS33

## FUNCTION TABLE (EACH RECEIVER)


DIFFERENTIAL INPUT	ENABLES		OUTPUT
	E	$\bar{E}$	
$V_{ID} \geq V_{TH}$	H	X	H
	X	L	H
$V_{TL} \leq V_{ID} \leq V_{TH}$	H	X	?
	X	L	?
$V_{ID} \leq V_{TL}$	X	L	L
	H	X	X
X	L	H	Z

**NOTES:**


H = High level, L = Low level, X = Irrelevant  
Z = High impedance (off), ? = Indeterminate  
E = Enable,  $\bar{E}$  = Enable

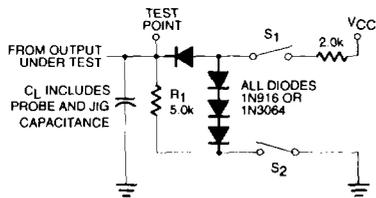

Load Test Circuit for 3-State Outputs

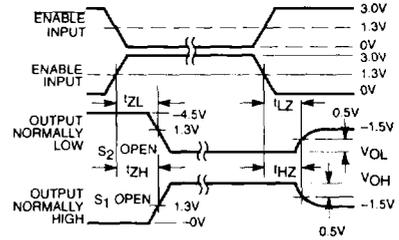

Enable and Disable Times<sup>2, 3, 4</sup>



Propagation Delay<sup>1, 4</sup>

**NOTES:**

1. Diagram shown for Enable Low.
2. Enable is tested with Enable High; Enable is tested with Enable Low.
3. S<sub>1</sub> and S<sub>2</sub> of Load Circuit are closed except where shown.
4. Pulse Generator for All Pulses: Rate  $\leq$  1.0MHz; Z<sub>O</sub> = 50 $\Omega$ ; t<sub>r</sub>  $\leq$  15ns; t<sub>f</sub>  $\leq$  6.0ns.

SL00125