



SO2222AW

SMALL SIGNAL NPN TRANSISTOR


PRELIMINARY DATA

| Type | Marking |
|----------|---------|
| SO2222AW | 20W |

- SILICON EPITAXIAL PLANAR NPN TRANSISTOR
- MINIATURE SOT-323 PLASTIC PACKAGE FOR SURFACE MOUNTING CIRCUITS
- TAPE & REEL PACKING
- THE PNP COMPLEMENTARY TYPE IS SO2907AW

APPLICATIONS

- WELL SUITABLE FOR PORTABLE EQUIPMENT
- SMALL LOAD SWITCH TRANSISTOR WITH HIGH GAIN AND LOW SATURATION VOLTAGE

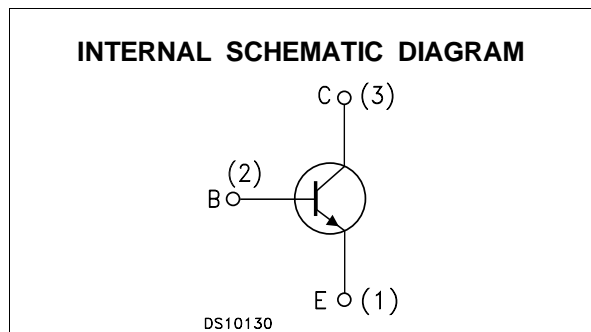

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|-----------|---|------------|------|
| V_{CBO} | Collector-Emitter Voltage ($I_E = 0$) | 75 | V |
| V_{CEO} | Collector-Emitter Voltage ($I_B = 0$) | 40 | V |
| V_{EBO} | Emitter-Base Voltage ($I_C = 0$) | 6 | V |
| I_C | Collector Current | 0.6 | A |
| I_{CM} | Collector Peak Current ($t_p < 5$ ms) | 0.8 | A |
| P_{tot} | Total Dissipation at $T_{amb} = 25$ °C | 200 | mW |
| T_{stg} | Storage Temperature | -65 to 150 | °C |
| T_j | Max. Operating Junction Temperature | 150 | °C |

SO2222AW

THERMAL DATA

| | | | | |
|------------------------|-------------------------------------|-----|-----|------|
| R _{thj-amb} • | Thermal Resistance Junction-Ambient | Max | 625 | °C/W |
|------------------------|-------------------------------------|-----|-----|------|

• Device mounted on a PCB area of 1 cm².

ELECTRICAL CHARACTERISTICS (T_{case} = 25 °C unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|------------------------|--|--|-----------------------------------|------|------------|--------------------------------------|
| I _{CEX} | Collector Cut-off Current (V _{BE} = -3 V) | V _{CE} = 60 V | | | 10 | nA |
| I _{BEX} | Base Cut-off Current (V _{BE} = -3 V) | V _{CE} = 60 V | | | 20 | nA |
| I _{CBO} | Collector Cut-off Current (I _E = 0) | V _{CB} = 75 V V _{CB} = 75 V T _j = 150 °C | | | 10 10 | nA μA |
| I _{EBO} | Emitter Cut-off Current (I _C = 0) | V _{EB} = 3 V | | | 15 | nA |
| V _{(BR)CEO} * | Collector-Emitter Breakdown Voltage (I _B = 0) | I _C = 10 mA | 40 | | | V |
| V _{(BR)CBO} | Collector-Base Breakdown Voltage (I _E = 0) | I _C = 10 μA | 75 | | | V |
| V _{(BR)EBO} | Emitter-Base Breakdown Voltage (I _C = 0) | I _E = 10 μA | 6 | | | V |
| V _{CE(sat)} * | Collector-Emitter Saturation Voltage | I _C = 150 mA I _B = 15 mA I _C = 500 mA I _B = 50 mA | | | 0.3 1 | V V |
| V _{BE(sat)} * | Collector-Base Saturation Voltage | I _C = 150 mA I _B = 15 mA I _C = 500 mA I _B = 50 mA | 0.6 | | 1.2 2 | V V |
| h _{FE} * | DC Current Gain | I _C = 0.1 mA V _{CE} = 10 V I _C = 1 mA V _{CE} = 10 V I _C = 10 mA V _{CE} = 10 V I _C = 150 mA V _{CE} = 10 V I _C = 150 mA V _{CE} = 1 V I _C = 500 mA V _{CE} = 10 V | 35 50 75 100 50 40 | | 300 | |
| f _T | Transition Frequency | I _C = 20 mA V _{CE} = 20V f = 100MHz | 270 | | | MHz |
| C _{CBO} | Collector-Base Capacitance | I _E = 0 V _{CB} = 10 V f = 1 MHz | | 4 | 8 | pF |
| C _{EBO} | Emitter-Base Capacitance | I _C = 0 V _{EB} = 0.5 V f = 1MHz | | 20 | 25 | pF |
| NF | Noise Figure | I _C = 0.1 mA V _{CE} = 10 V f = 1 KHz Δf = 200 Hz R _G = 1 KΩ | | 4 | | dB |
| h _{ie} * | Input Impedance | V _{CE} = 10 V I _C = 1 mA f = 1 KHz V _{CE} = 10 V I _C = 10 mA f = 1 KHz | 2 0.25 | | 8 1.25 | KΩ KΩ |
| h _{re} * | Reverse Voltage Ratio | V _{CE} = 10 V I _C = 1 mA f = 1 KHz V _{CE} = 10 V I _C = 10 mA f = 1 KHz | | | 8 4 | 10 ⁻⁴ 10 ⁻⁴ |
| h _{fe} * | Small Signal Current Gain | V _{CE} = 10 V I _C = 1 mA f = 1 KHz V _{CE} = 10 V I _C = 10 mA f = 1 KHz | 50 75 | | 300 375 | |
| h _{oe} * | Output Admittance | V _{CE} = 10 V I _C = 1 mA f = 1 KHz V _{CE} = 10 V I _C = 10 mA f = 1 KHz | 5 25 | | 35 200 | μS μS |

* Pulsed: Pulse duration = 300 μs, duty cycle ≤ 2 %


ELECTRICAL CHARACTERISTICS (Continued)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|--------|--------------|--|------|------|------|------|
| t_d | Delay Time | $I_C = 150 \text{ mA}$ $I_B = 15 \text{ mA}$ | | 5 | 10 | ns |
| t_r | Rise Time | $V_{CC} = 30 \text{ V}$ | | 12 | 25 | ns |
| t_s | Storage Time | $I_C = 150 \text{ mA}$ $I_{B1} = - I_{B2} = 15 \text{ mA}$ | | 185 | 225 | ns |
| t_f | Fall Time | $V_{CC} = 30 \text{ V}$ | | 24 | 60 | ns |

* Pulsed: Pulse duration = 300 μs , duty cycle $\leq 2 \%$

SOT-323 MECHANICAL DATA

| DIM. | mm | | | inch | | |
|------|------|------|------|-------|-------|-------|
| | MIN. | TYP. | MAX. | MIN. | TYP. | MAX. |
| A | 0.8 | | 1.1 | 0.031 | | 0.043 |
| A1 | 0 | | 0.1 | 0 | | 0.003 |
| b | 0.25 | | 0.4 | 0.009 | | 0.015 |
| c | 0.1 | | 0.26 | 0.004 | | 0.010 |
| D | 1.8 | 2.0 | 2.2 | 0.070 | 0.078 | 0.086 |
| E | 1.15 | 1.25 | 1.35 | 0.045 | 0.049 | 0.053 |
| e | | 0.65 | | | 0.025 | |
| H | 1.8 | 2.1 | 2.4 | 0.070 | 0.082 | 0.094 |
| L | 0.1 | 0.2 | 0.3 | 0.004 | 0.007 | 0.011 |
| Q | 0 | | 10° | 0 | | 10° |

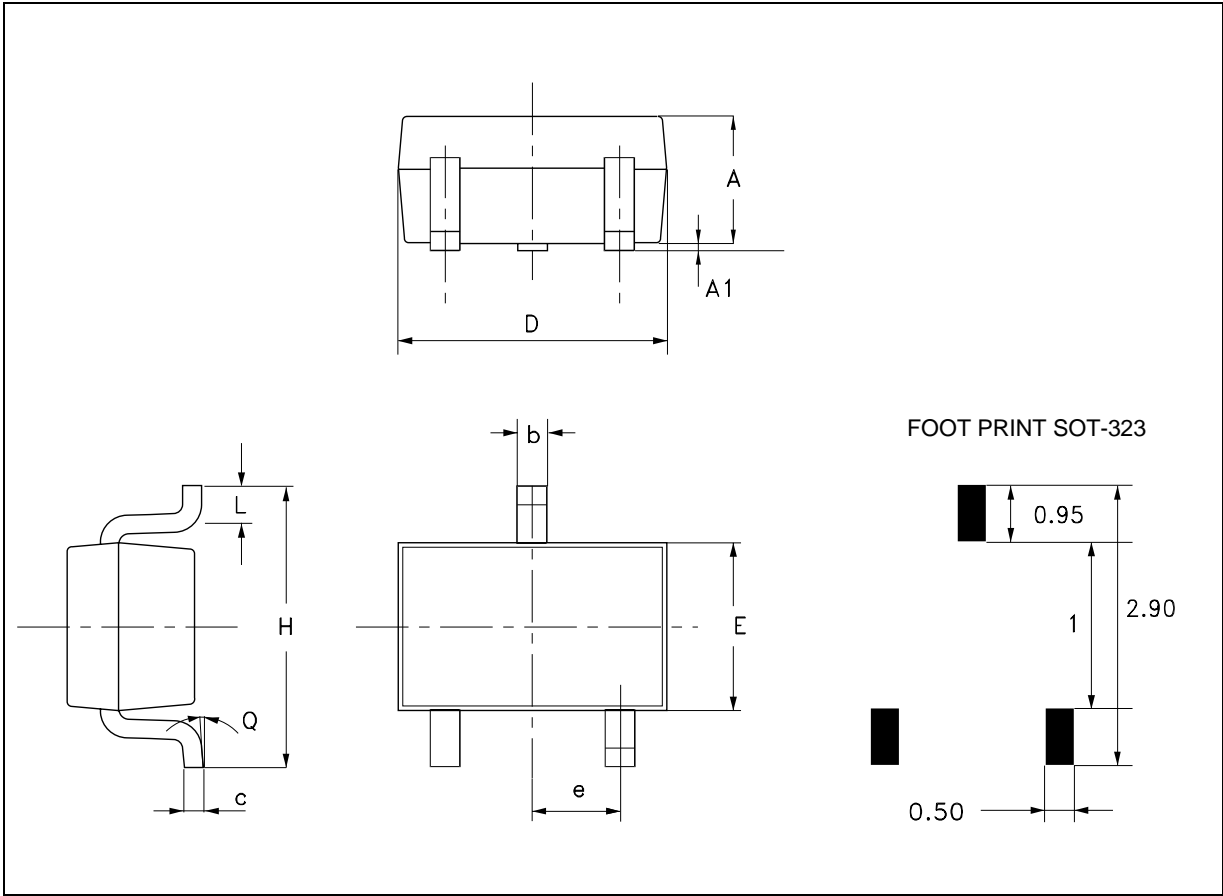

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2003 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>