



Features

- For use with Model 3682 and 3683 digital pushbutton precision potentiometers

H-385 - Panel Seal Assembly

Physical Characteristics¹

Material (Boot).....	Clear silicone rubber
Material (Frame).....	Rigid black plastic
Expected Life.....	100,000 actuations minimum
Weight	
H-385-2.....	Approximately 8.50 gm
H-385-3.....	Approximately 9.92 gm


Application Data

- Protects front of the pot from unwanted entry of rain, dust, grease or oils
- Transparent for easy viewing of numerals
- Tear resistant for long life
- Matte finish black plastic frame to complement most front panels


Bourns® Model H-385 Panel Seal Assembly minimizes accidental entry of liquids or foreign matter through the front of the Model 3682 and 3683 Potentiometers.

H-385 MOUNTING INSTRUCTIONS

1. Cut out and drill panel¹ per chart.
2. Install snap-in potentiometer².
3. Locate silicone boot³ and frame⁴ over potentiometer and holes.
4. Attach panel seal assembly to panel with two #6 screws (not supplied).

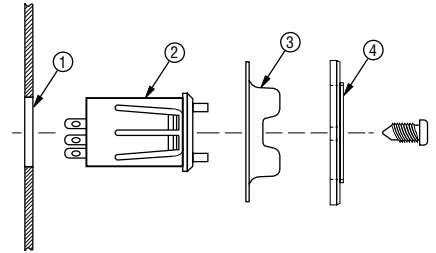

PANEL CUT-OUT/HOLE DIMENSIONS

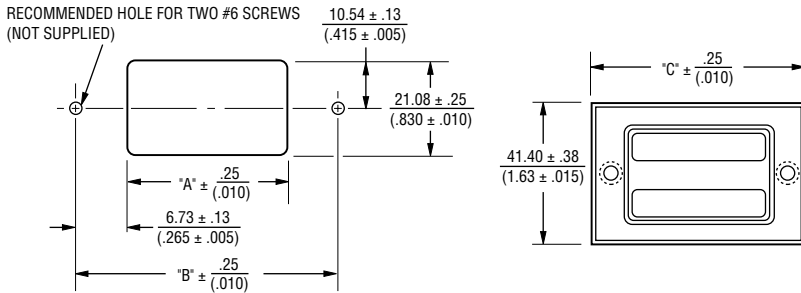

For Use With	Part Number	Frame Dimensions "C"	Panel Cutout/ Hole Dimensions "A" "B"	
3682	H-385-2	50.60 (1.992)	25.91 (1.020)	39.37 (1.550)
3683	H-385-3	60.76 (2.392)	36.07 (1.420)	49.53 (1.950)

¹At room ambient: +25 °C nominal and 50 % relative humidity nominal, except as noted.

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$