



偉詮電子股份有限公司  
**Weltrend Semiconductor, Inc.**

---

# **WT7012**

## **Dual Motor Driver and DC-DC Converter**

**REV. 1.20**

**November 8, 2000**

The information in this document is subject to change without notice.  
©Weltrend Semiconductor, Inc. All Rights Reserved.

---

新竹市科學工業園區工業東九路 24 號 2 樓  
2F, No. 24, Industry E. 9<sup>th</sup> RD., Science-Based Industrial Park, Hsin-Chu, Taiwan  
TEL:886-3-5780241 FAX:886-3-5794278.5770419  
Email:support@weltrend.com.tw

## FUNCTION DESCRIPTION

The WT7012 consist a monolithic bridge driver power MOS FET for its driver stage. It is provided with forward, reverse and brake functions and is ideal as a driver circuit for a motor that winds or rewinds the film in a camera. The DC-DC is PWM control step-up switching regulator which mainly consists of a reference voltage source, an oscillation circuit, and an error amplifier.

## FEATURES


### Motor drive

- High drive current 2.0A, VDD, VM at 5V.
- Low ON resistance
- At Standby will turns OFF charge pump circuit.
- Low voltage drive (1.8V Min.)
- Thermal protection circuit.

### DC-DC Converter

- Low voltage operation.
- Duty ratio: Built-in PWM control circuit
- External parts: Transistor, coil, diode, and capacitor only
- Shutdown function, During shutdown: 1uA (max.)
- Output voltage: 3V

## PIN CONFIGURATION

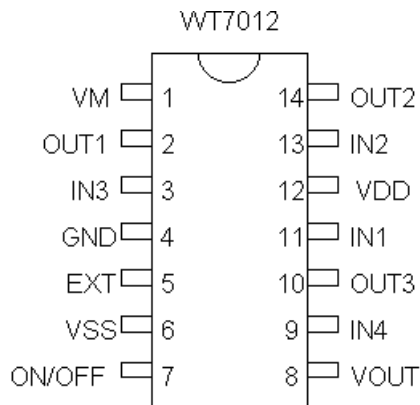

**PIN DESCRIPTION**

No.	Pin Name	I/O	Description
1	VM	I	Motor supply voltage
2	OUT1	O	Loading terminal 1
3	IN3	I	Input control 3
4	GND		Ground
5	EXT	O	External transistor connection (DC Converter).
6	VSS		Ground (DC Converter).
7	ON/OFF	I	Shutdown control (DC Converter). ON:Low/OFF:High .
8	VOUT	I	Output voltage (DC Converter).
9	IN4	I	Input control 4
10	OUT3	O	Loading terminal 3
11	IN1	I	Input control 1
12	VDD	I	Supply voltage
13	IN2	I	Input control 2
14	OUT2	O	Loading terminal 2