

LED SPECIFICATION

1025LB7C



Features

- Single color
- High bright output
- Low power consumption
- High reliability and long life

> Descriptions:


- Dice material:
- Emitting Color:

Super Bright Blue


- Lens Type:

Water Clear

> Directivity:

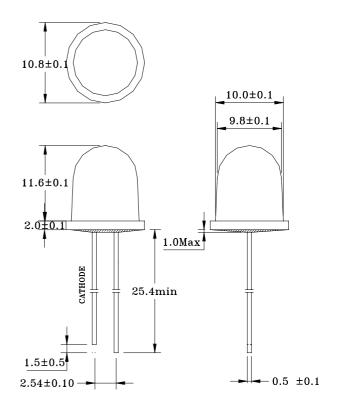

- 1. All dimensions are millimeters
- 2. Tolerance is +/-0.25mm unless otherwise noted

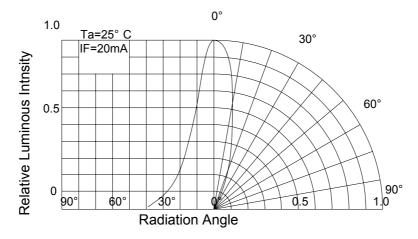



Absolute maximum ratings (Ta = 25° C)

| Parameter | Symbol | Test Condition | Va | Unit | |
|-----------------------|----------------------------|-----------------|------|------|-------|
| Falameter | Parameter Symbol Test Conc | | Min. | Max. | Offic |
| Reverse Voltage | VR | IR = 30 μ A | 5 | | V |
| Forward Current | lF | | | 30 | mA |
| Power Dissipation Pd | | | | 105 | mW |
| Pulse Current | lpeak | Duty=0.1mS,1kHz | | 100 | mA |
| Operating Temperature | Topr | | -20 | +85 | °C |
| Storage Temperature | Tstr | | -25 | +100 | °C |

Electrical and optical characteristics (Ta = 25°)

| Parameter | Symbol | Test Condition | Value | | | Unit |
|--------------------------|----------------|----------------|-------|-------|------|-------|
| Farameter | Symbol | Test Condition | Min. | Тур. | Max. | Offic |
| Forward Voltage | VF | IF = 20mA | | V7~V9 | | |
| Reverse Current | IR | VR = 5V | | | 30 | μA |
| Dominate Wavelength | λ d | IF = 20mA | | B4~B6 | | |
| Spectral Line half-width | Δλ | IF = 20mA | | 22 | | nm |
| Luminous Intensity | IV | IF = 20mA | | V,W | | |
| Viewing Angle | 2 θ 1/2 | IF = 20mA | 17 | | 23 | Deg. |



BRIGHTNESS BIN

| Bin Code | IV(mcd) |
|----------|-----------|----------|-----------|----------|-----------|----------|-----------|
| А | 0-5.0 | Н | 37.2-52.0 | Q | 390-550 | Х | 41805860 |
| В | 5.0-7.0 | J | 52.0-72.8 | R | 550-770 | Y | 5860-8200 |
| С | 7.0-9.8 | K | 72.8-102 | S | 770-1100 | Z1 | 8-10cd |
| D | 9.8-13.7 | L | 102-145 | Т | 1100-1520 | Z2 | 10-12cd |
| E | 13.7-19.0 | М | 145-200 | U | 1520-2130 | Z3 | 12-14cd |
| F | 19.0-26.6 | Ν | 200-280 | V | 2130-3000 | Z4 | 14-16cd |
| G | 26.6-37.2 | Р | 280-390 | W | 3000-4180 | Z5 | 16-18cd |

WAVELENGTH BIN


| Ligth Col. | Bin Code | Wavel. (nm) | Ligth Col. | Bin Code | Wavel. (nm) |
|------------|----------|-------------|-----------------|----------|-------------|
| | B1 | 450-455 | | YG1 | 555-558 |
| | B2 | 455-460 | | YG2 | 558-561 |
| BLUE | B3 | 460-465 | VELLOW | YG3 | 561-564 |
| DLUL | B4 | 465-470 | YELLOW GREEN | YG4 | 564-567 |
| | B5 | 470-475 | GHEEN | YG5 | 567-570 |
| | B6 | 475-480 | | YG6 | 570-573 |
| | G1 | 491-494 | | YG7 | 573-576 |
| | G2 | 494-497 | | Y1 | 582-585 |
| | G3 | 497-500 | | Y2 | 585-588 |
| BLUE | G4 | 500-503 | YELLOW | Y3 | 588-591 |
| GREEN | G5 | 503-506 | | Y4 | 591-594 |
| | G6 | 506-509 | Y5 | 594-597 | |
| | G7 | 509-512 | | YO1 | 597-600 |
| | G8 | 512-515 | YELLOW | YO2 | 600-603 |
| | G9 | 515-518 | ORANGE | YO3 | 603-606 |
| | G10 | 518-521 | | YO4 | 606-609 |
| | G11 | 521-524 | DUDE | 01 | 609-612 |
| | G12 | 524-527 | PURE ORANGE | O2 | 612-615 |
| | G13 | 527-530 | ONANGE | O3 | 615-618 |
| PURE | G14 | 530-533 | | R1 | 618-621 |
| GREEN | G15 | 533-536 | | R2 | 621-624 |
| | G16 | 536-539 | | R3 | 624-627 |
| | G17 | 539-542 | RED | R4 | 627-630 |
| | G18 | 542-545 | | R5 | 630-633 |
| | G19 | 545-548 | | R6 | 633-636 |

FORWARD VOLTAGE (VF) BIN

| Bin Code | VF (V) |
|----------|---------|----------|---------|----------|---------|----------|---------|
| V1 | 1.6-1.8 | V5 | 2.4-2.6 | V9 | 3.2-3.4 | V13 | 4.0-4.2 |
| V2 | 1.8-2.0 | V6 | 2.6-2.8 | V10 | 3.4-3.6 | V14 | 4.2-4.4 |
| V3 | 2.0-2.2 | V7 | 2.8-3.0 | V11 | 3.6-3.8 | V15 | 4.4-4.6 |
| V4 | 2.2-2.4 | V8 | 3.0-3.2 | V12 | 3.8-4.0 | V16 | 4.6-4.8 |



Typical electrical/optical characteristic curves:

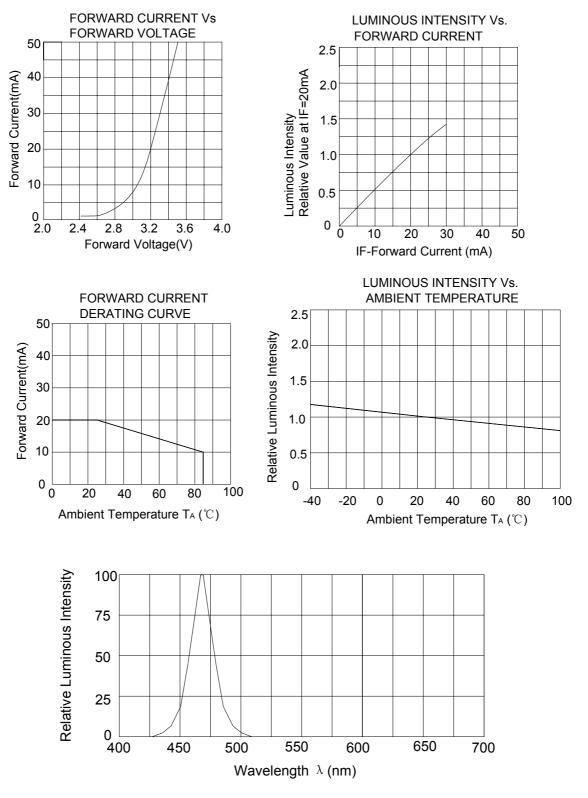





LED LAMP APPLICATION

| •SOLDERIN | G | |
|-------------------|--|---|
| METHOD | SOLDERING CONDITIONS | REMARK |
| DIP SOLDERING | Bath temperature: 260±5℃ Immersion time: with 5 sec | Solder no closer than 3mm from the base of the package Using soldering flux," RESIN FLUX" is recommended. |
| SOLDERING IRON | Soldering iron: 30W or smaller Temperature at tip of iron: 260℃ or lower Soldering time: within 5 sec. | During soldering, take care not to press the tip of iron against the lead. (To prevent heat from being transferred directly to the lead, hold the lead with a pair of tweezers while soldering |

 When soldering the lead of LED in a condition that the package is fixed with a panel (See Fig.1), be careful not to stress the leads with iron tip.



2) When soldering wire to the lead, work with a Fig (See Fig.2) to avoid stressing the package.

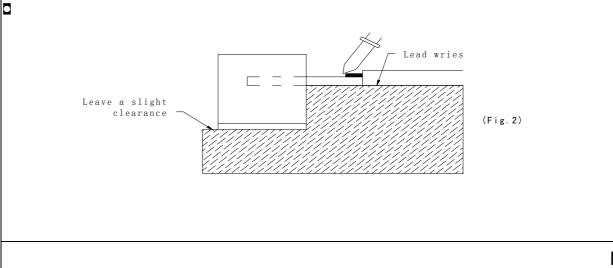




0

LED LAMP APPLICATION


3) Similarly, when a jig is used to solder the LED to PC board, take care as much as possible to avoid steering the leads (See Fig.3).



- 4) Repositioning after soldering should be avoided as much as possible. If inevitable, be sure to preserve the soldering conditions with irons stated above: select a best-suited method that assures the least stress to the LED.
- Lead cutting after soldering should be performed only after the LED temperature has returned to normal temperature.


•LED MOUNTING METHOD

1) When mounting the LED by using a case, as shown Fig.4, ensure that the mounting holds on the PC board match the pitch of the leads correctly-tolerance of dimensions of the respective components including the LED should be taken into account especially when designing the case, PC board, etc. to prevent pitch misalignment between the leads and board holes, the diameter of the board holes should be slightly larger than the size of the lead. Alternatively, the shape of the holes should be made oval. (See Fig.4)

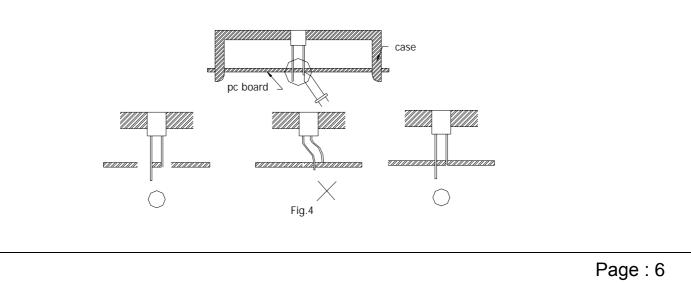



LED LAMP APPLICATION

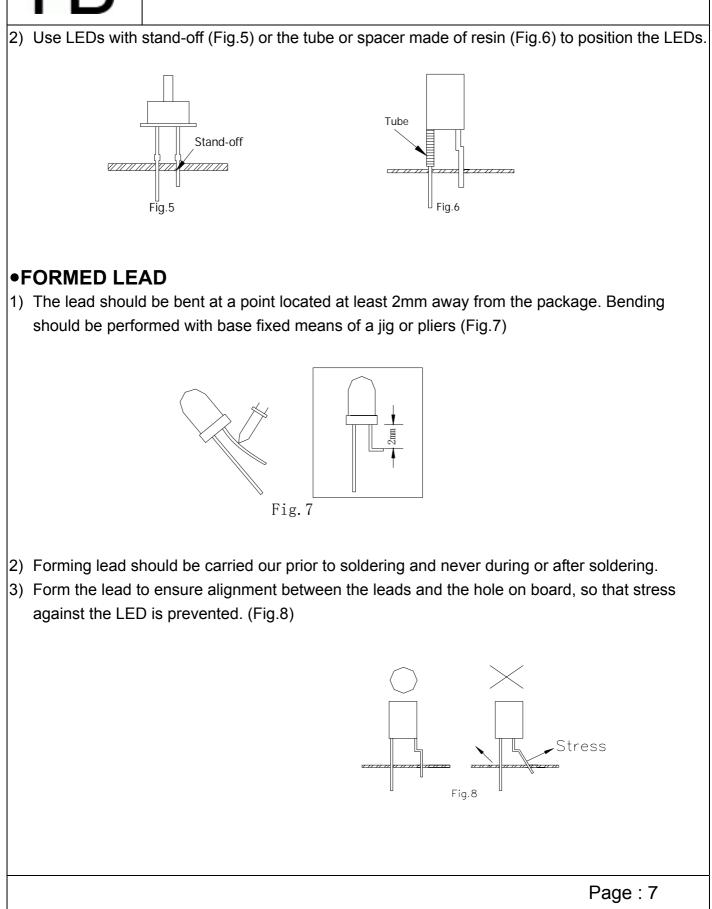


ŀВ

LED LAMP APPLICATION

•LEAD STRENGTH

1) Bend strength

Do not bend the lead more than twice. (Fig.9)



Tensile strength (@Room Temperature)
 If the force is 1kg or less, there will be no problem. (Fig.10)



•HANDLING PRECAUTIONS

Although rigid against vibration, the LEDs may damaged or scratched if dropped. So take care when handling.

•CHEMICAL RESISTANCE

- 1) Avoid exposure to chemicals as it may attack the LED surface and cause discoloration.
- When washing is required, refer to the following table for the proper chemical to be sued. (Immersion time: within 3 minutes at room temperature.)

| SOLVENT | ADAPTABILITY | | |
|--------------------------------|--------------|--|--|
| Freon TE | \odot | | |
| Chlorothene | \times | | |
| Isopropyl Alcohol | \odot | | |
| Thinner | \times | | |
| Acetone | \times | | |
| Trichloroethylene | \times | | |
| \odot Usable X Do not use. | | | |

NOTE: Influences of ultrasonic cleaning of the LED resin body differ depending on such factors as the oscillator output, size of the PC board and the way in which the LED is mounted. Therefore, ultrasonic cleaning should only be performed after confirming there is no problem by conducting a test under practical.



LED LAMP PASSED TESTS

Experiment Item:

| | Test Condition | | | | |
|---|--|--|--|--|--|
| Item | Lamp & IR | Reference Standard | | | |
| OPERATION LIFE | Ta : 25±5°C IF= 20mA RH : <=60%RH ① DYNAMIC:100mA 1ms 1/10 duty ② STATIC STATE: IF=20mA TEST TIME: 168HRS (-24HRS , +24HRS) 500HRS (-24HRS , +24HRS) 1000HRS (-24HRS , +72HRS) | MIL-STD-750 : 1026 MIL-STD-883 : 1005 JIS C 7021 : B-1 | | | |
| HIGH TEMPERATURE HIGH HUMIDITY STORAGE | Ta: 65℃±5℃ RH: 90~95%RH TEST TIME:240HRS±2HRS | MIL-STD-202:103B JIS C 7021:B-1 | | | |
| TEMPERATURE CYCLING | 105℃~25℃~-55℃~25℃ 30min 5min 30min 5min 10CYCLES | MIL-STD-202 : 107D MIL-STD-750 : 1051 MIL-STD-883 : 1010 JIS C 7021 : A-4 | | | |
| THERMAL SHOCK | 105℃±5℃ ~-55℃±5℃ 10min 10min 10CYCLES | MIL-STD-202 : 107D MIL-STD-750 : 1051 MIL-SYD-883 : 1011 | | | |
| SOLDER RESISTANCE | T,sol:260℃±5℃ DWELL TIME:10±lsec | MIL-STD-202 : 210A MIL-STD-750-2031 JIS C 7021 : A-1 | | | |
| SOLDERABILITY | T,sol:230℃±5℃ DWELL TIME:5±lsec | MIL-STD-202 : 208D MIL-STD-750 : 2026 MIL-STD-883 : 2003 JIS C 7021 : A-2 | | | |
| Drive Method | | | | | |
| Circuit m | odel A Circuit model B | | | | |
| | | | | | |
| (A)Recommended cire | cuit. | Page : 9 | | | |

(B)The difference of brightness between LED's could be found due to the Vf-If characteristics of LED.