

## Silicon NPN Power Transistors

## 2N5838 2N5839 2N5840

## DESCRIPTION

- With TO-3 package
- Low collector saturation voltage
- High breakdown voltage

## APPLICATIONS

- For use in switching power supply and other inductive switching circuits.

## PINNING

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

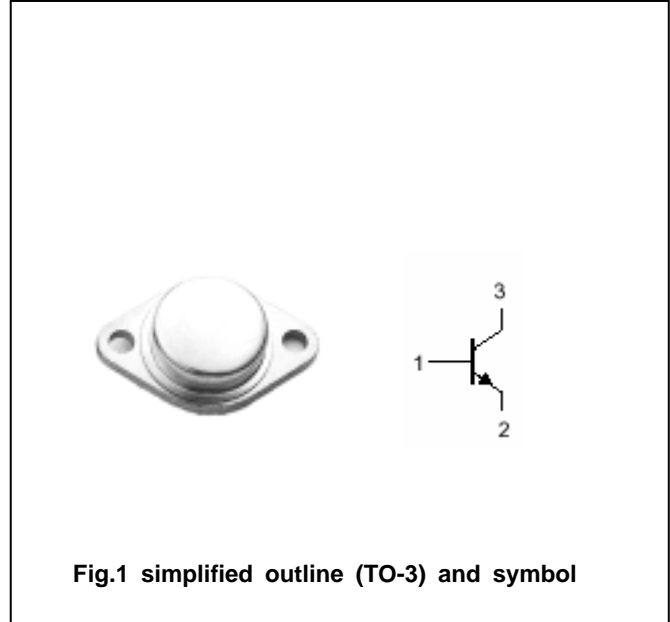


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings( $T_a =$ )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	2N5838	275	V
		2N5839	300	
		2N5840	375	
$V_{CEO}$	Collector-emitter voltage	2N5838	250	V
		2N5839	275	
		2N5840	350	
$V_{EBO}$	Emitter-base voltage	Open collector	6	V
$I_C$	Collector current		3	A
$P_D$	Total power dissipation	$T_C = 25$	100	W
$T_j$	Junction temperature		150	
$T_{stg}$	Storage temperature		-65~200	

## THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-c}$	Thermal resistance junction to case	1.25	/W

## Silicon NPN Power Transistors

## 2N5838 2N5839 2N5840

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEQ(SUS)</sub>	Collector-emitter sustaining voltage	2N5838	I <sub>C</sub> =0.1A ; I <sub>B</sub> =0	250			V
		2N5839		275			
		2N5840		350			
V <sub>CEsat</sub>	Collector-emitter saturation voltage		I <sub>C</sub> =2A; I <sub>B</sub> =0.4A			0.8	V
V <sub>BEsat</sub>	Base-emitter saturation voltage		I <sub>C</sub> =2A; I <sub>B</sub> =0.4A			1.5	V
I <sub>CBO</sub>	Collector cut-off current		V <sub>CB</sub> =Rated V <sub>CB0</sub> ; I <sub>E</sub> =0			1.0	mA
I <sub>CEV</sub>	Collector cut-off current		V <sub>CE</sub> = Rated V <sub>CE0</sub> ; V <sub>BE(off)</sub> =1.5V			1.0	mA
I <sub>EBO</sub>	Emitter cut-off current		V <sub>EB</sub> =5V; I <sub>C</sub> =0			1.0	mA
h <sub>FE</sub>	DC current gain	2N5838	I <sub>C</sub> =3A ; V <sub>CE</sub> =3V	8		40	
		2N5839/5840	I <sub>C</sub> =2A ; V <sub>CE</sub> =3V	10		50	
f <sub>T</sub>	Transition frequency		I <sub>C</sub> =1A ; V <sub>CE</sub> =10V; f=1.0MHz	5			MHz

PACKAGE OUTLINE

