

SANYO Semiconductors DATA SHEET

Bi-CMOS LSI

LV8411GR — For DSC, and Cell Phone Camera Modules 4-channel Single-chip Motor Driver IC

Overview

The LV8411GR is an H bridge motor driver IC and is able to control 4 modes of forward, reverse, brake, and standby. This IC housed in a miniature package is optimum for use in a stepping motor driving system for DSC or a camera module of cell phones.

Features

- Saturation drive H bridge: 4 channels
- Built-in thermal protection circuit
- Built-in low voltage malfunction prevention circuit
- Incorporates a transistor for driving photosensors

Specifications

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Power supply voltage 1	V _M max		6.0	V
Power supply voltage 2	V _{CC} max		6.0	V
Output peak current	I _O peak	Channels 1 to 4, t ≤ 10msec, ON-duty ≤ 20%	600	mA
Output continuous current 1	I _O max1	Channels 1 to 4	400	mA
Output continuous current 2	I _O max2	PI1	30	mA
Allowable power dissipation	Pd max	Mounted on a circuit board*	1.05	W
Operating temperature	Topr		-30 to +85	°C
Storage temperature	Tstg		-55 to +150	°C

^{*} Specified circuit board : 40mm×50mm×0.8mm : glass epoxy four-layer board

- Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.
- Specifications of any and all SANYO Semiconductor Co., Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

LV8411GR


Recommended Operating Conditions at Ta = 25°C


Parameter	Symbol	Conditions	Ratings	Unit
Power supply voltage range 1	٧ _M		2.5 to 5.5	V
Power supply voltage range 2	VCC		2.5 to 5.5	V
Logic input voltage range	V _{IN}		0 to V _{CC} +0.3	V
Input frequency	fIN	IN1 to 8, INA	to 100	kHz

Danamatan	0	Conditions		Ratings		
Parameter	Symbol	Conditions	min	typ	max	Unit
Standby mode current drain	Istn	IN1 to 8 = "L"			1.0	μΑ
VM current drain	IM	IN1 = "H", IM1 + IM2, with no load	50	100	200	μА
V _{CC} current drain	Icc	IN1 = "H"	0.3	0.6	1.2	mA
V _{CC} low-voltage cutoff voltage	VthV _{CC}		2.0	2.25	2.5	V
Low-voltage hysteresis voltage	VthHIS		100	150	200	mV
Thermal shutdown temperature	TSD	Design guarantee value *	160	180	200	°C
Thermal hysteresis width	ΔTSD	Design guarantee value *	10	30	50	°C
OUT1 to 8	1			,		
Logic pin internal pull-down resistance	Rin	IN1 to 8	50	100	200	kΩ
Logic pin input current	linL	V _{IN} = 0V, IN1 to 8			1.0	μА
	linH	V _{IN} = 3.3V, IN1 to 8	16.5	33	60	μΑ
Logic input high-level voltage	Vinh	IN1 to 8	2.5			V
Logic input low-level voltage	Vinl	IN1 to 8			1.0	V
Output on-resistance	Ronu	I _O = 400mA, upper ON resistance		0.75	0.9	Ω
	Rond	I _O = 400mA, lower ON resistance		0.45	0.6	Ω
Output leakage current	lOleak				1.0	μΑ
Diode forward voltage	VD	ID = -400mA	0.7	0.9	1.2	V
PI1	•				•	
Logic pin internal pull-down resistance	Rin	INA	50	100	200	kΩ
Logic pin input current	linL	V _{IN} = 0V, INA			1.0	μΑ
	linH	V _{IN} = 3.3V, INA	16.5	33	60	μΑ
Logic input high-level voltage	Vinh	INA	2.5			V
Logic input low-level voltage	Vinl	INA			1.0	V
Output on-resistance	Ron	I _O = 10mA		3.0	6.0	Ω
Output leakage current	l _O leak				1.0	μА


Package Dimensions

unit : mm (typ)






Pin Assignment



Block Diagram

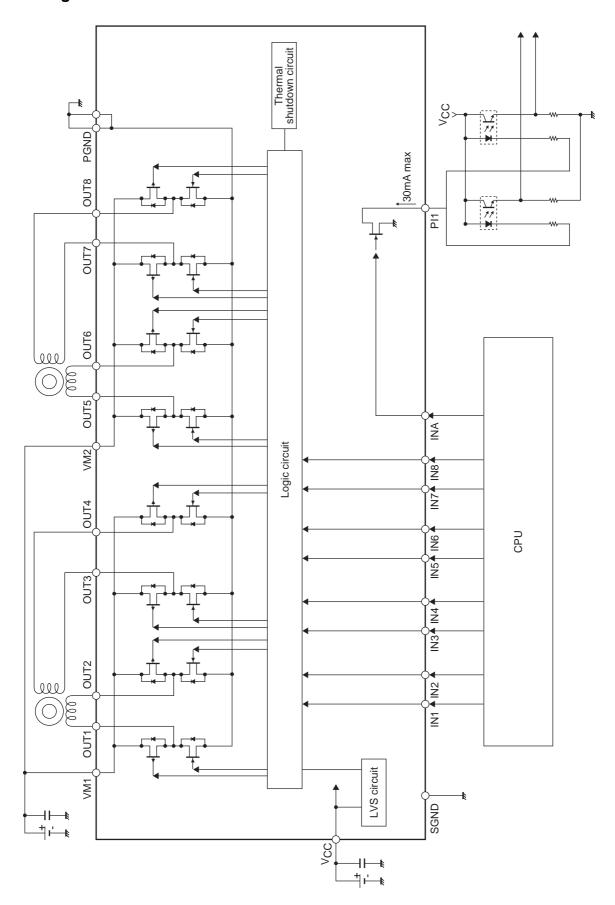

LV8411GR

Pin Functions

Pin No.	Pin name	Pin Function	Equivalent Circuit
	_		Lyurvaient Oncolt
1	INA	Control signal input pin (Photo sensor driving transistor)	Vcc
2	IN1	Control signal input pin	Vcc • • • •
3	IN2	Control signal input pin	
4	IN3	Control signal input pin	
5	IN4	Control signal input pin	"¬
6	IN5	Control signal input pin	★
7	IN6	Control signal input pin	
8	IN7	Control signal input pin	
9	IN8	Control signal input pin	10kΩ
3	1140	Control signal input pin	+ • • • • • • • • • • • • • • • • • • •
			↓
			<u> </u>
			\$100kΩ +
			"
			GND
11	OUT8	Outpin	
13	OUT7	Outpin	VM
14	OUT6	Outpin	Y
15	OUT5	Outpin	
16	OUT4	Outpin	
17	OUT3	Outpin	
18	OUT2	Outpin	
20	OUT1	Outpin	
		·	
			Ţ ·
			<u></u>
			
			lack
			PGND
24	PI1	Photo sensor driving transistor output	
		pin	
			OND
			GND
22	Vcc	Logic system power supply	
		connection pin	
10	VM2	Motor power supply connection pin	
21	VM1	Motor power supply connection pin	
23	SGND	Signal ground	
12	PGND2	Power ground	
19	PGND1	Power ground	
	•	·	•


Logic input specifications

• Common channels 1 to 4

ch1: IN1 to IN2, OUT1 to OUT2 ch2: IN3 to IN4, OUT3 to OUT4 ch3: IN5 to IN6, OUT5 to OUT6 ch4: IN7 to IN8, OUT7 to OUT8

Input		Output		On another words	
IN1	IN2	OUT1	OUT2	Operation mode	
L	L	OFF	OFF	Standby	
Н	L	Н	L	CW (forward)	
L	Н	L	Н	CCW (reverse)	
Н	Н	L	L	Brake	

• Output stage transistor function

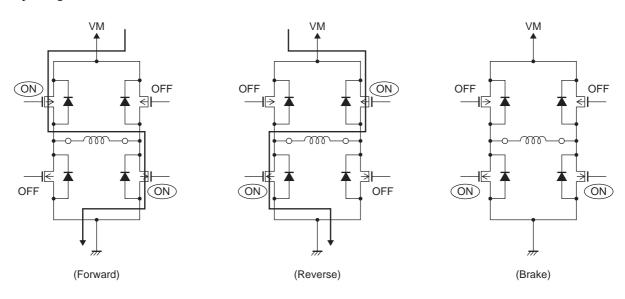

• Photo sensor driving transistor

When thermal shutdown and V_{CC} low-voltage cut circuits are activated, OUT1 through OUT8 are turned OFF under control of the internal circuit. But the output (PI1) of photo sensor driving transistor continues operation.

Input	Photo sensor driving
INA	PI1
L	OFF
Н	ON

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of July, 2008. Specifications and information herein are subject to change without notice.