

2SC3527

Silicon PNP Triple-Diffused Planar Type

High Breakdown Voltage, High Speed Switching


■ Features

- High speed switching
- High collector-base voltage (V_{CBO})
- Good linearity of DC current gain (h_{FE})
- "Full Pack" package for simplified mounting on a heat sink with one screw

■ Absolute Maximum Ratings ($T_c=25^\circ\text{C}$)

Item	Symbol	Value	Unit	
Collector-base voltage	V_{CBO}	500	V	
Collector-emitter voltage	V_{CES}	500	V	
	V_{CEO}	400	V	
Emitter-base voltage	V_{EBO}	7	V	
Peak collector current	I_{CP}	25	A	
Collector current	I_C	15	A	
Base current	I_B	6	A	
Collector power dissipation	P_C	$T_c=25^\circ\text{C}$	100	W
		$T_a=25^\circ\text{C}$	3	
Junction temperature	T_j	150	$^\circ\text{C}$	
Storage temperature	T_{stg}	-55 ~ +150	$^\circ\text{C}$	

■ Package Dimensions

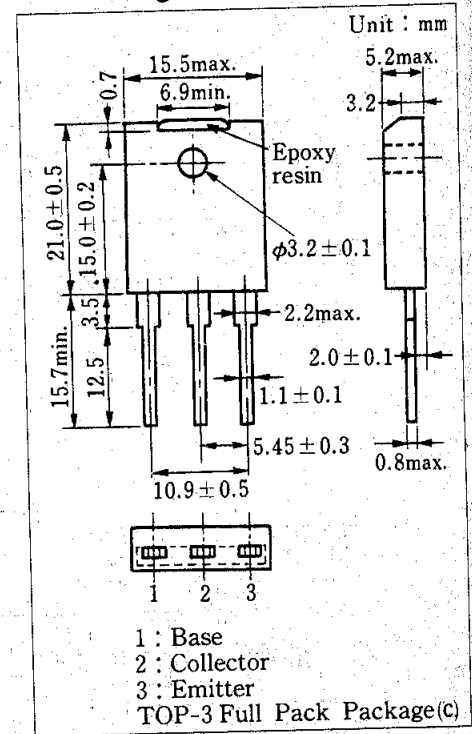

■ Electrical Characteristics ($T_c=25^\circ\text{C}$)

Item	Symbol	Condition	min.	typ.	max.	Unit
Collector cutoff current	I_{CBO}	$V_{CB}=500\text{ V}, I_E=0$			100	μA
Emitter cutoff current	I_{EBO}	$V_{EB}=7\text{ V}, I_C=0$			100	μA
Collector-base voltage	$V_{CEO(sus)}^*$	$I_C=0.5\text{ A}, L=25\text{ mH}$	400			V
DC current gain	h_{FE1}	$V_{CE}=5\text{ V}, I_C=2\text{ A}$	15			
	h_{FE2}	$V_{CE}=5\text{ V}, I_C=7\text{ A}$	10			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=7\text{ A}, I_B=1.4\text{ A}$			1	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=7\text{ A}, I_B=1.4\text{ A}$			1.5	V
Transition frequency	f_T	$V_{CE}=10\text{ V}, I_C=1\text{ A}, f=1\text{ MHz}$		15		MHz
Turn-on time	t_{on}	$I_C=7\text{ A}$			1	μs
Storage time	t_{stg}	$I_{B1}=1.4\text{ A}, I_{B2}=-1.4\text{ A}$			2.5	μs
					1	μs
Collector current fall time	t_f	$V_{CC}=125\text{ V}$			1	μs

* $V_{CEO(sus)}$ Test method
50/60Hz Mercury relay

