

SANYO	No.3146	2SC4600
	NPN Triple Diffused Planar Silicon Transistor Switching Regulator Applications	

Features

- Surface mount type device making the following possible
 - Reduction in the number of manufacturing processes for 2SC4600-applied equipment
 - High density surface mount applications
 - Small size of 2SC4600-applied equipment
- High breakdown voltage, high reliability
- Fast switching speed
- Wide ASO
- Adoption of MBIT process

Absolute Maximum Ratings at Ta = 25°C

			unit
Collector to Base Voltage	V _{CB0}	800	V
Collector to Emitter Voltage	V _{CEO}	500	V
Emitter to Base Voltage	V _{EBO}	7	V
Collector Current	I _C	5	A
Collector Current(Pulse)	I _{CP}	10	A
Base Current	I _B	2	A
Collector Dissipation	P _C	1.65	W
		T _c = 25°C	
Junction Temperature	T _j	50	W
Storage Temperature	T _{stg}	150	°C
		-55 to +150	°C

Electrical Characteristics at Ta = 25°C

Collector Cutoff Current	I _{CBO}	V _{CB} = 500V, I _E = 0	min	typ	max
Emitter Cutoff Current	I _{EBO}	V _{EB} = 5V, I _C = 0			10
DC Current Gain	h _{FE} (1)	V _{CE} = 5V, I _C = 0.6A			10
	h _{FE} (2)	V _{CE} = 5V, I _C = 3A	15*		50*
Gain-Bandwidth Product	f _T	V _{CE} = 10V, I _C = 0.6A		8	
Output Capacitance	c _{ob}	V _{CB} = 10V, f = 1MHz		18	MHz
C-E Saturation Voltage	V _{CE(sat)}	I _C = 3A, I _B = 0.6A			80
B-E Saturation Voltage	V _{BE(sat)}	I _C = 3A, I _B = 0.6A			1.0
					1.5


Continued on next page.

* : For the h_{FE}(1) of the 2SC4600, specify two ranks or more in principle.

15 L 30	20 M 40	30 N 50
---------	---------	---------

Package Dimensions 2069

(unit : mm)

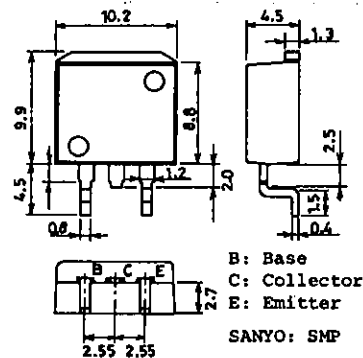


2SC4600





Continued from preceding page.








			min	typ	max	unit
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 1\text{mA}, I_E = 0$	800			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 5\text{mA}, R_{BE} = \infty$	500			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 1\text{mA}, I_C = 0$	7			V
C-E Sustain Voltage	$V_{CEO(sus)}$	$I_C = 5\text{A}, I_{B1} = 1\text{A}, L = 50\mu\text{H}$	500			V
	$V_{CEX(sus)}$	$I_C = 2.5\text{A}, I_{B1} = -I_{B2} = 1\text{A}, L = 1\text{mH}, \text{clamped}$	500			V
Turn-ON Time	t_{on}	$I_C = 4\text{A}, I_{B1} = 0.8\text{A},$ $I_{B2} = -1.6\text{A}, R_L = 50\Omega,$ $V_{CC} = 200\text{V}$			0.5	μs
Storage Time	t_{stg}				3.0	μs
Fall Time	t_f				0.3	μs

Switching Time Test Circuit

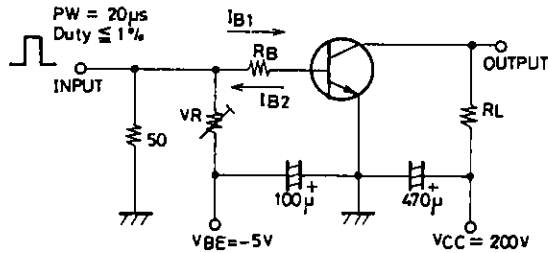

Unit (Resistance : Ω , Capacitance : F)

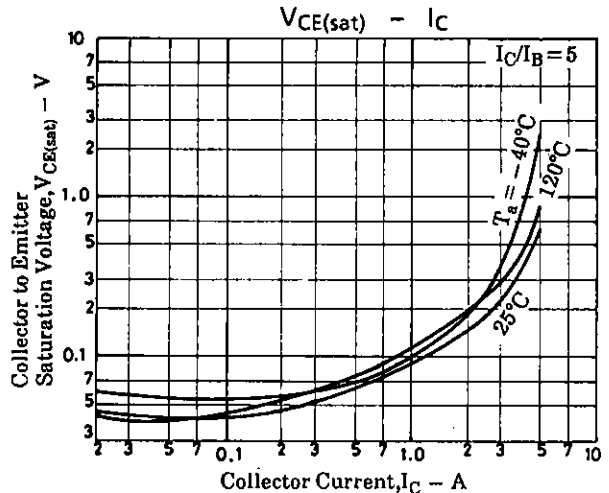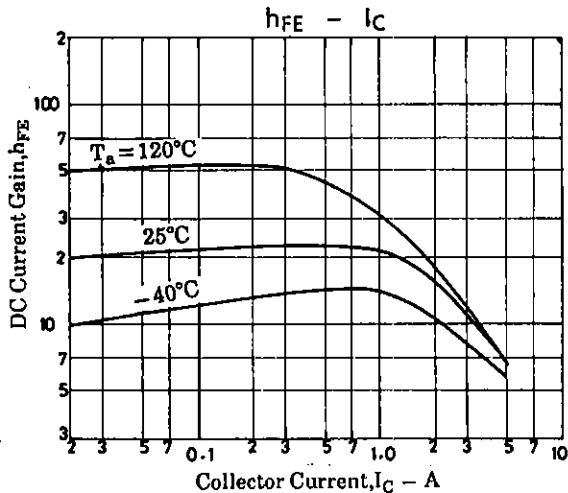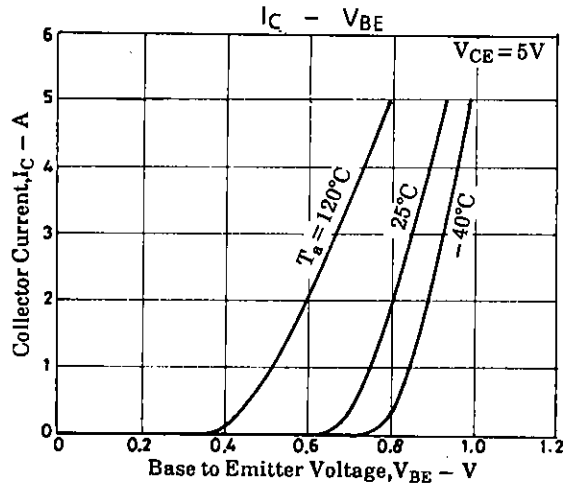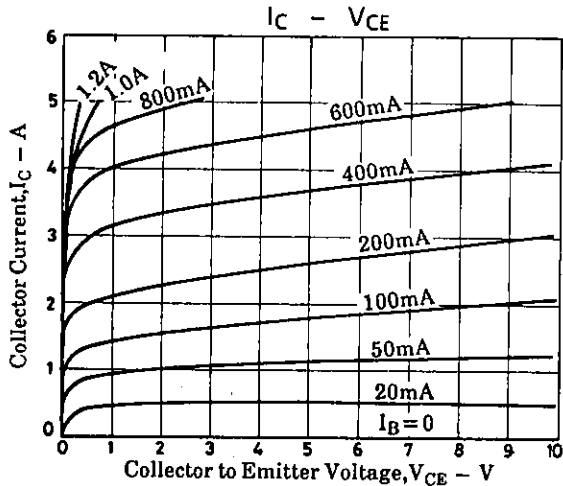

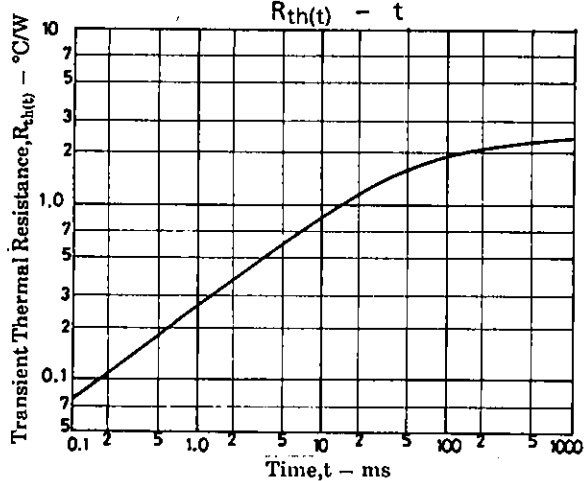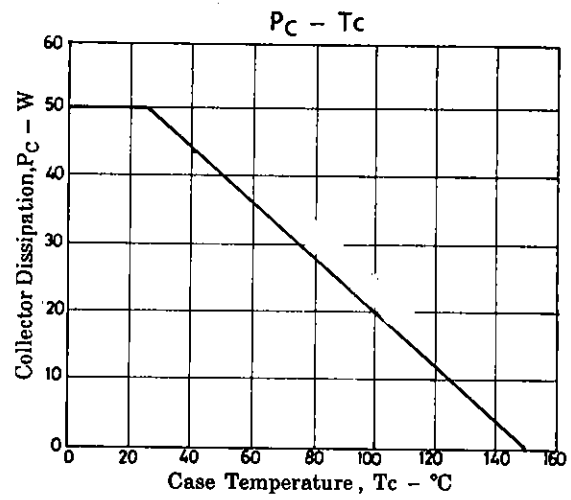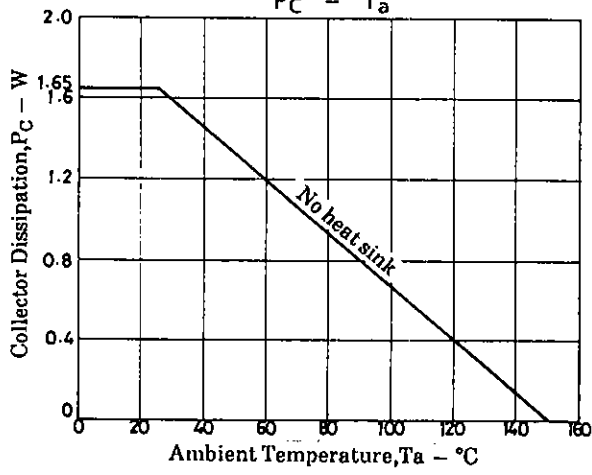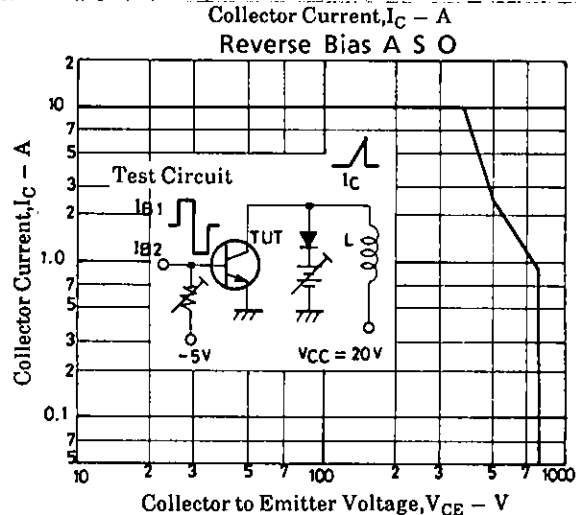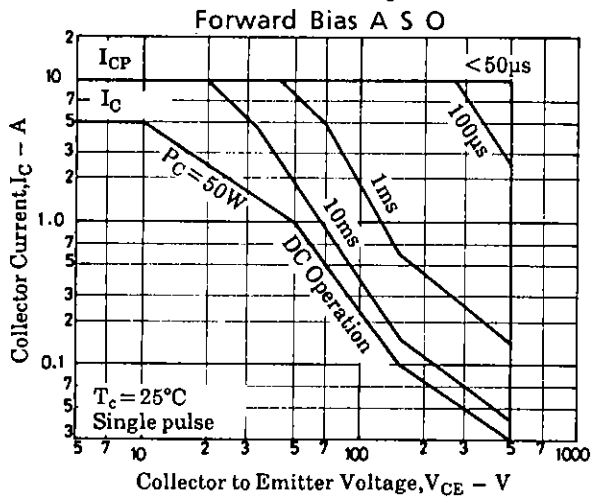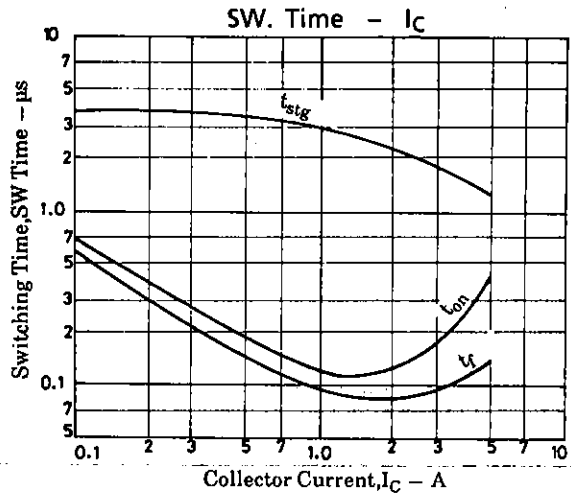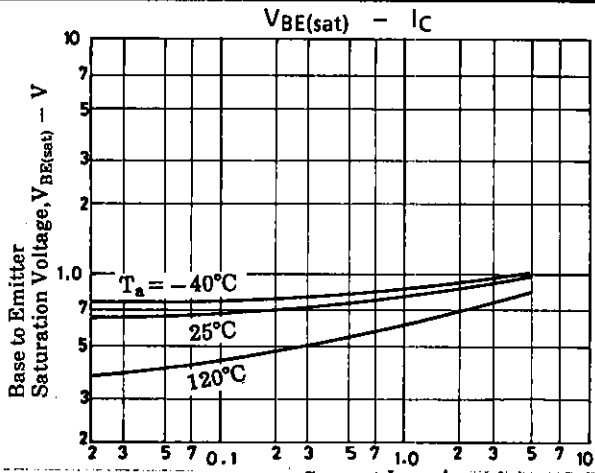

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.