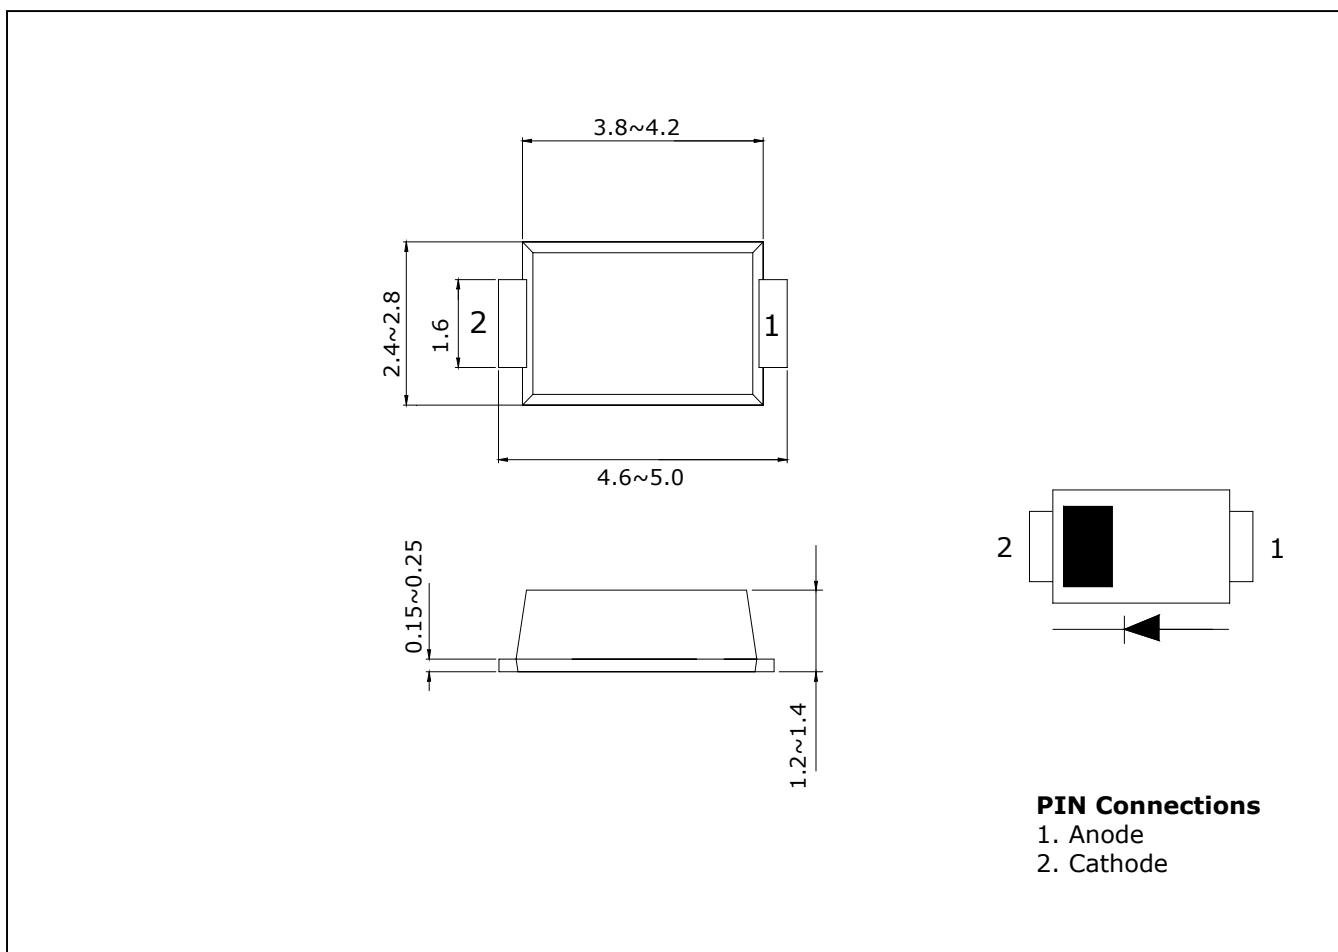


**Features**

- Switching type power supply application
- Converter & Chopper Application
- Low IR ( $I_R=10\mu A$  Typ )

**Ordering Information**

Type No.	Marking	Package Code
SDB30A40	3A40	SOD-106

**Outline Dimensions****unit : mm**

**Absolute maximum ratings**

Ta=25°C

Characteristic	Symbol	Rating	Unit
Reverse voltage	V <sub>R</sub>	40	V
Forward current	I <sub>F</sub>	3	A
Non-repetitive peak forward current	I <sub>FSM</sub>	70	A
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 ~ 150	°C


**Electrical Characteristics**

Ta=25°C


Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =3A	-	0.5	0.55	V
Reverse current	I <sub>R</sub>	V <sub>R</sub> =40V	-	-	0.5	mA
Thermal Resistance	R <sub>θ JA</sub>	When mounted on a glass epoxy board	-	-	76	°C/W
Total capacitance	C <sub>T</sub>	V <sub>R</sub> = 10V, f=1MHz	-	110	-	pF

## Electrical Characteristic Curves


**Fig. 1 Forward Characteristics**

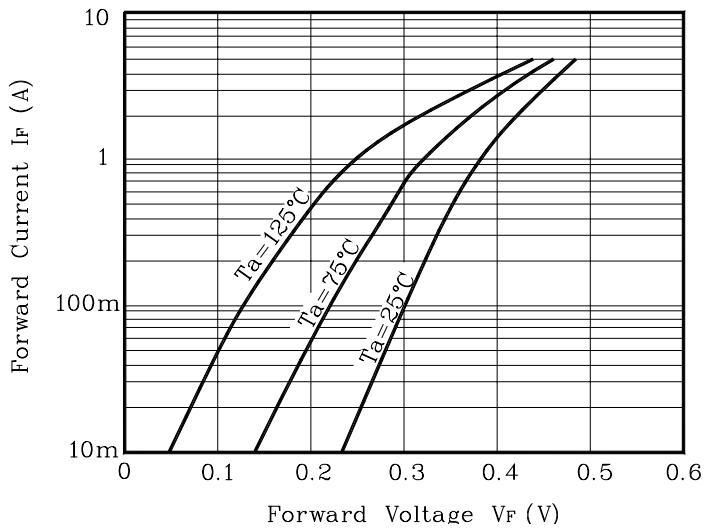


**Fig. 2 Reverse Characteristics**

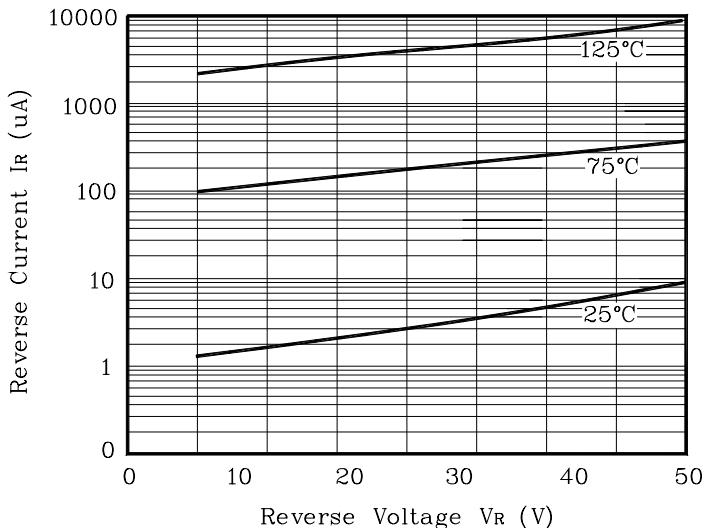

**Fig. 3 Total Capacitance**

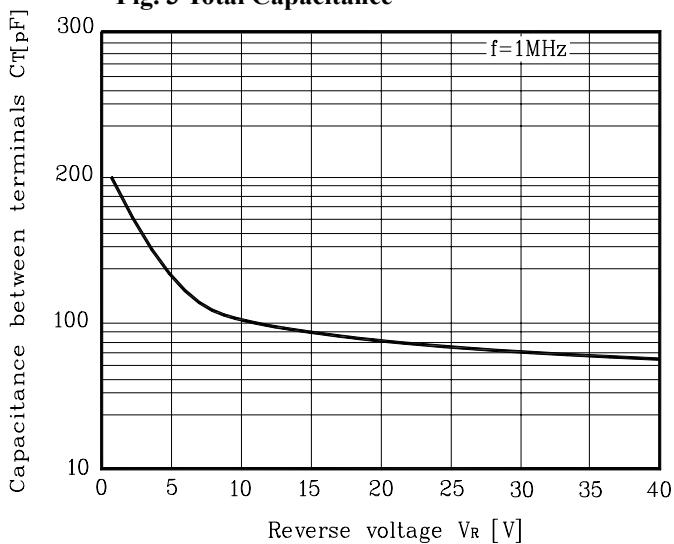

**Fig. 4  $I_F - P_F$  Forward Power dissipation**

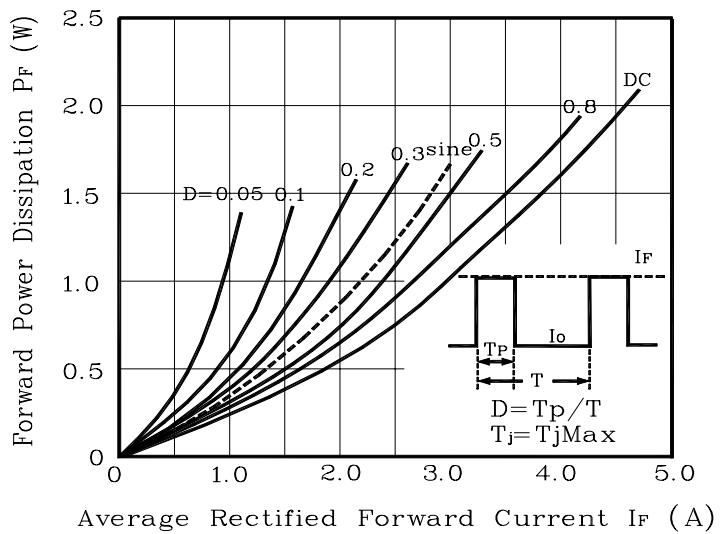

**These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).**

**Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).**

**AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.**