

IN75232

EIA-232-D INTERFACE 1 CHIP IC


DESCRIPTION

The IN75232 is monolithic device containing 3 independent drivers and 5 receivers. It is designed to interface between data terminal equipment and data communication equipment by EIA-232-D.

FEATURES

- Meets standard EIA-232-D (Revision of RS-232-C)
- Drivers
 - Current Limited Output 10 mA Typical
 - Power-off Output Impedance 300Ω Min
 - Slew Rate Control by Load Capacitor
 - Flexible Supply Voltage Range
 - Input Compatible with Most TTL and DTL Circuits
- Receiver
 - Input Resistance $3 k\Omega$ to $7 k\Omega$
 - Input Signal Range ± 30 V
 - Built-in Input Hysteresis (Double Threshold)
- 20 DIP/SOP

Block Diagram

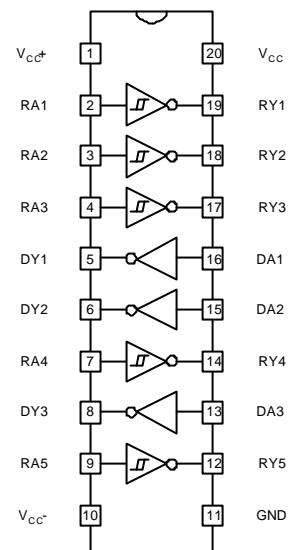

PIN DESCRIPTION

Name	Pin No	Function	Name	Pin No	Function
Vcc+	1	Driver Section Supply	Vcc-	10	Driver Section Supply —
DA1	16		DY1	5	
DA2	15		DY2	6	
DA3	13		DY3	8	
Vcc	20	Receiver Section Supply	GND	11	Ground
RA1	2	Receiver Input	RY1	19	Receiver Output
RA2	3		RY2	18	
RA3	4		RY3	17	
RA4	7		RY4	14	
RA5	9		RY5	12	



Korzhenevskogo 12, Minsk, 220064, Republic of Belarus
 Fax: +375 (17) 278 28 22,
 Phone: +375 (17) 278 07 11, 277 24 70, 277 24 61,
 277 69 16
 E-mail: belms@belms.belpak.minsk.by
 URL: www.bms.by

BELMICROSYSTEMS

IN75232**ABSOLUTE MAXIMUM RATINGS**

Symbol	Parametr	Rating	Unit
Vcc+	Supply Voltage	15	V
Vcc-	Supply Voltage	-15	V
Vcc	Supply Voltage	10	V
VI (Driver)	Input Voltage	-15...+7	V
VI (Receiver)	Input Voltage	± 30	V
VO (Driver)	Output Voltage	-15...+15	V
PT	Continuous Power Dissipation (Below 25°C)	1.0	W
T _{STG}	Storage Temperature	-65...+175	°C
T _{OP}	Operating Temperature	0...+75	°C

ELECTRICAL CHARACTERISTICS**Supply Current**

Symbol	Parameter	Test Condition		Min	Typ	Max	Unit
1	2	3		4	5	6	7
Icc+	Supply Current from Vcc+	Vcc+=9V	Vin=1.9V		11.3	15	mA
		No Load	Vin=0.8V		3.4	4.5	
		Vcc+=12V	Vin=1.9V		14.3	19	
		No Load	Vin=0.8V		4.1	5.5	
		Vcc+=15V	Vin=1.9V			25	
		No Load	Vin=0.8V			9	
Icc-	Supply Current from Vcc-	Vcc=-9V	Vin=1.9V		-12	-15	mA
		No Load	Vin=0.8V			-3.2	
		Vcc=-12V	Vin=1.9V		-16	-19	
		No Load	Vin=0.8V			-3.2	
		Vcc=-15V	Vin=1.9V			-25	
		No Load	Vin=0.8V			-3.2	
Icc	Supply Current from Vcc	Vcc=5V	Vin=5V		20	30	mA

Driver Section

V _{OH}	High Level Output Voltage	V _{IL} =0.8V R _L =3 kΩ	Vcc+=9V Vcc-=9V	6	7		V
			Vcc+=13.2V Vcc-=13.2V	9	10.5		
V _{OL}	Low Level Output Voltage	V _{IL} =1.9V R _L =3 kΩ	Vcc+=9 V Vcc-=9V			-6	V
			Vcc+=13.2V Vcc-=13.2V			-9	
I _{IH}	High Level Input Current		V _I =5V			10	μA
I _{IL}	Low Level Input Current		V _I =0		-1	-1.6	mA
I _{os(H)}	Short Circuit Output Current at High Level		V _I =0.8V V _O =0	-6	-10	-12	mA



Korzhenevskogo 12, Minsk, 220064, Republic of Belarus
 Fax: +375 (17) 278 28 22,
 Phone: +375 (17) 278 07 11, 277 24 70, 277 24 61,
 277 69 16
 E-mail: belms@belms.belpak.minsk.by
 URL: www.bms.by

BELMICROSYSTEMS

IN75232**ELECTRICAL CHARACTERISTICS****Supply Current**

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
1	2	3	4	5	6	7
$I_{OS(L)}$	Short Circuit Output Current at Low Level	$V_I=1.9V$ $V_O=0$	6	10	12	mA
R_O	Output Resistance, Power Off	$V_{CC+}=0, V_{CC-}=0$ $V_O= -2V \text{ to } 2V$	300			Ω
Driver Switching Characteristics		$(V_{CC+}=9V, V_{CC-}=-9V, T_A=25^\circ C)$				
t_{PLH}	Propogation Delay Time, Low-To-High Level Output	$R_L=3\text{ k}\Omega$ $C_L=15\text{ pF}$		400	500	ns
t_{PHL}	Propogation Time, High -To- Low Level Output			100	175	ns
t_{THL}	Transition Delay Time, Low-To-High Level Output			55	100	bns
t_{TLH}	Transition Delay Time, High-To-Low Level Output			45	75	ns
Receiver Section						
V_{OH}	High Level Output Voltage	$V_I=0.75V, I_{OL}=-0.5\text{ mA}$	2.6	4	5	V
		Input Open, $I_{OL}=-0.5\text{ mA}$	2.6	4	5	
V_{OL}	Low Level Output Voltage	$V_I=3V, I_{OL}=10\text{ mA}$		0.2	0.45	V
I_{IH}	High-Level Input Current	$V_I=25V$	3.6		8.3	V
		$V_I=3V$	0.43			
I_{IL}	Low-Level Input Current	$V_I=-25V$	-3.6		-8.3	mA
		$V_I=-3V$	-0.43			
VT^+	Positive-Going Thrteshold Voltage		1.75	1.9	2.25	mA
VT^-	Negative-Going Thrteshold Voltage		0.75	0.97	1.25	V
Receiver Switching Characteristics			$V_{CC}=5V$			
t_{PLH}	Propogation Delay Time, Low-To-High Level Output	$C_L=15\text{ pF}$ $R_L=3.9\text{ k}\Omega$		100	150	ns
t_{PHL}	Propogation Time, High -To- Low Level Output	$C_L=15\text{ iO}$ $R_L=390\text{ k}\Omega$		25	50	ns
t_{THL}	Transition Delay Time, Low-To-High Level Output	$C_L=15\text{ pF}$ $R_L=3.9\text{ k}\Omega$		120	175	ns
t_{TLH}	Transition Delay Time, High-To-Low Level Output	$C_L=15\text{ pF}$ $R_L=390\text{ k}\Omega$		10	20	ns



Korzhenevskogo 12, Minsk, 220064, Republic of Belarus
 Fax: +375 (17) 278 28 22,
 Phone: +375 (17) 278 07 11, 277 24 70, 277 24 61,
 277 69 16
 E-mail: belms@belms.belpak.minsk.by
 URL: www.bms.by

BELMICROSYSTEMS