

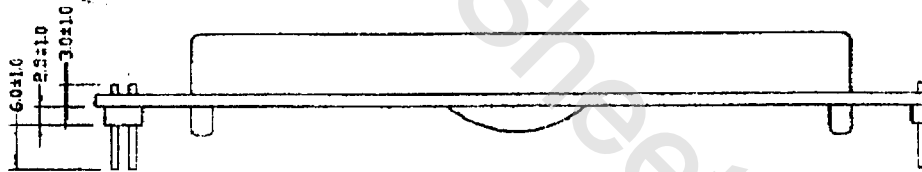


液晶之友 电话: 020-33819057
 Http://www.lcdfriends.com

www.DataSheetU.com

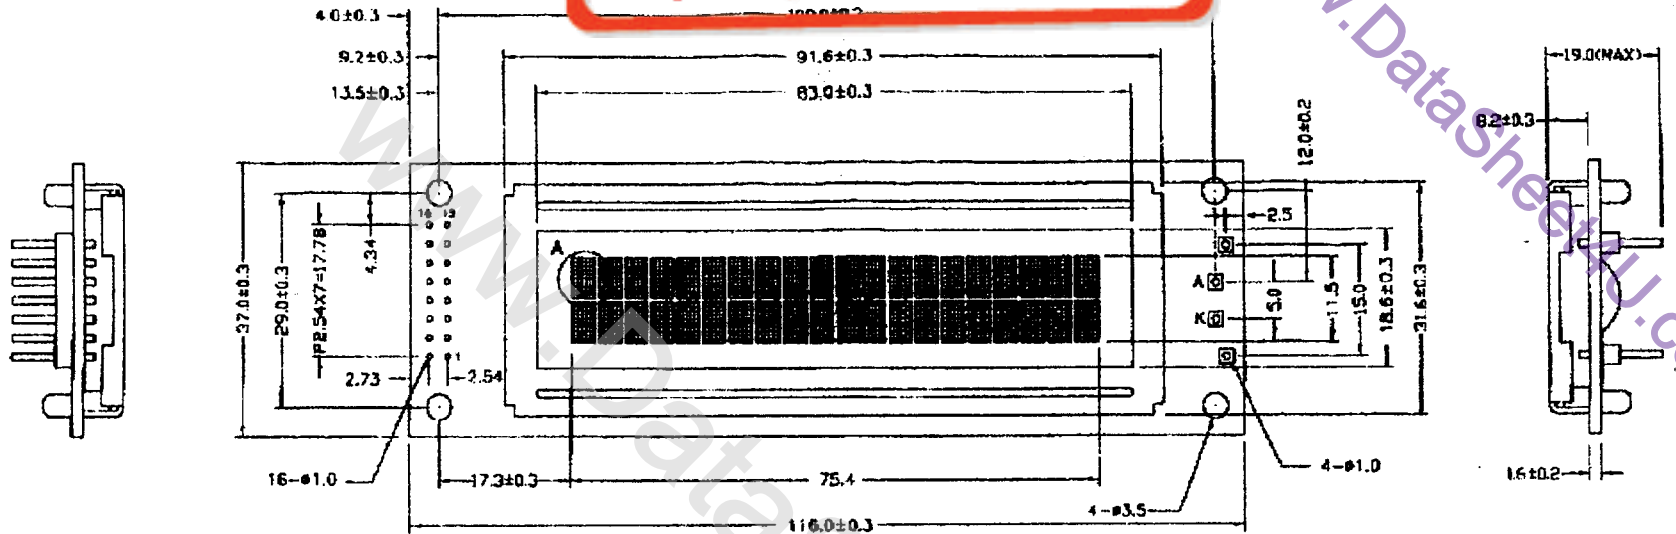

DETAIL A:

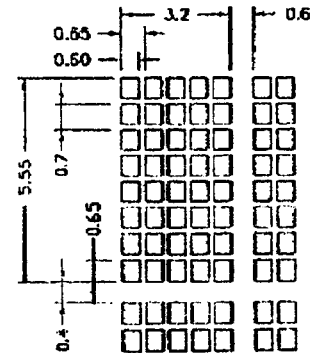

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VCC	VPE	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW-GREEN MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE: 4.7V
- 6.OPERATING TEMP: -20°C-+70°C
- 7.STORAGE TEMP: -30°C-+80°C
- 8.LED BACKLIGHT
- 9.CONTROLLER: SED12780-OB
- 10.WITH CONNECTOR
- 11.UNMARKED TOLERANCE: ±0.3mm
- 12.BEZEL IS TO BE PAINTED BLACK




TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 张冰 2002-02-09
 CHECKED BY: 潘伟 2002-02-09
 APPROVED BY: 王冰 2002-02-09
 CONFIRMED BY:

TITLE: TM202LBCW7
 DWG NO: G-3
 DWG NAME: TM202LBCW7-G-3
 SHEET NO: 1 OF 1



SCALE:
 UNIT: mm