

Features

- Micropower operation
- Operation with magnetic field of either north or south pole (omnipolar)
- 2.5V to 5.5V battery operation
- Chopper stabilized
- Superior temperature stability
- Good RF noise immunity
- -40°C to 85°C operating temperature
- SIP-3L/SC59-3L/Low profile DFN2020-6 package
- ESD (HBM) > 5KV for DFN2020-6
> 6KV for SIP-3L and SC59-3L
- Lead Free Finish/RoHS Compliant for Lead Free products (Note 1)
- Green Packages: SC59-3L, DFN2020-6
- Lead Free Package: SIP-3L

General Description

AH180 is comprised of two Hall effect plates and an open-drain output driver, mainly designed for battery-operation, hand-held equipment (such as Cellular and Cordless Phone, PDA). The total power consumption in normal operation is typically 24μW with a 3V power source.

Either north or south pole of sufficient strength will turn the output on. The output will be turned off under no magnetic field. While the magnetic flux density (**B**) is larger than operating point (**Bop**), the output will be turned on (low), the output is held until **B** is lower than release point (**Brp**), then turned off.


Applications

- Cover switch in clam-shell cellular phones
- Cover switch in Notebook PC/PDA
- Contact-less switch in consumer products °C

Pin Description

Name	P/I/O	Pin #	Description
Vdd	P/I	1	Power Supply Input
GND	P/I	2	Ground
Output	O	3	Output Pin

Ordering Information

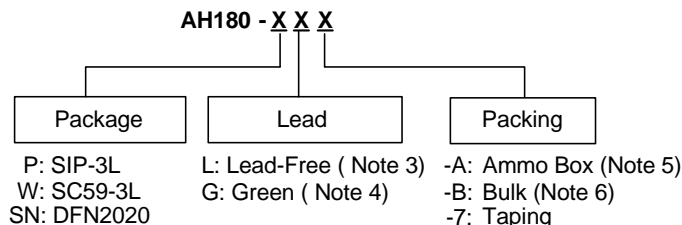



Note: 1. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see *EU Directive Annex Notes 5 and 7*.

	Package Code	Packaging (Note 2)	Tube/Bulk		7" Tape and Reel		Ammo Box		
			Quantity	Part Number Suffix	Quantity	Part Number Suffix	Quantity	Part Number Suffix	
	AH180-P	P	SIP-3L	1000	-B	NA	NA	4000/Box	-A
	AH180-W	W	SC59-3L	NA	NA	3000/Tape & Reel	-7	NA	NA
	AH180-SN	SN	DFN2020-6	NA	NA	3000/Tape & Reel	-7	NA	NA

Note: 2. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.


3. Lead Free is only for SIP-3L.
4. Green is only for SC59 and DFN2020.
5. Ammo Box is for SIP-3L Spread Lead.
6. Bulk is for SIP-3L Straight Lead.

Pin Assignment

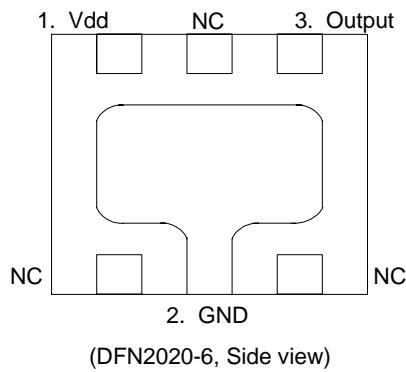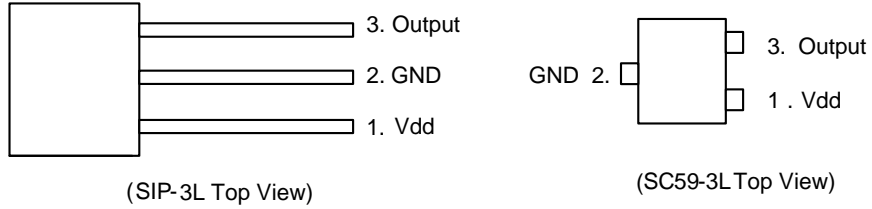


Note: 7. NC is "No Connection" which is recommended to be tied to ground.

Block Diagram

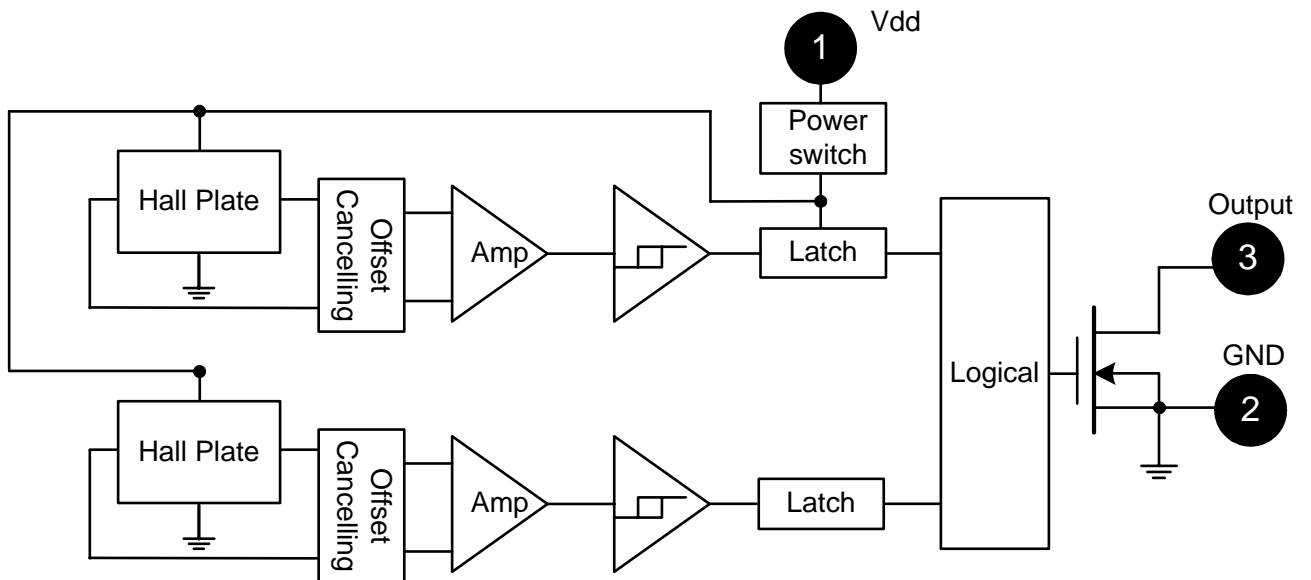

Typical Circuit

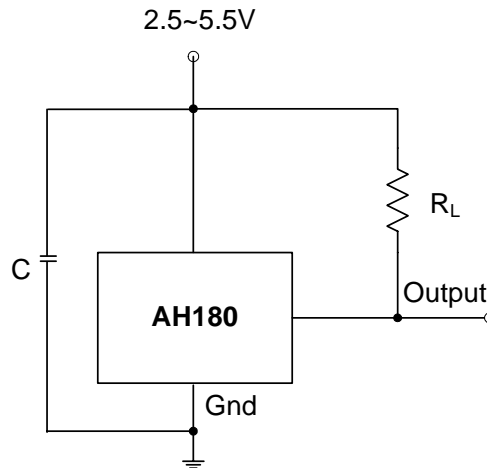

Note: 8. C is for power stabilization and to strengthen the noise immunity, the recommended capacitance is 10nF~100nF.

Absolute Maximum Ratings (at $T_A = 25^\circ\text{C}$)

Characteristics	Symbol	Values	Unit
Supply voltage	Vdd	7	V
Magnetic flux density	B	Unlimited	
Operating Temperature Range	T_A	-40 to +85	$^\circ\text{C}$
Storage Temperature Range	T_s	-65 to +150	$^\circ\text{C}$
Package Power Dissipation	PD	SIP-3L	550 mW
		SC59-3L/DFN2020-6	230 mW
Maximum Junction Temp	T_{jC}	150	$^\circ\text{C}$

Recommended Operating Conditions ($T_A = 25^\circ\text{C}$)

Parameter	Symbol	Conditions	Rating	Unit
Supply Voltage	Vdd	Operating	2.5~5.5	V

Electrical Characteristics ($T_A = +25^\circ\text{C}$, $V_{dd} = 3\text{V}$; unless otherwise specified)


Characteristic	Symbol	Conditions	Min	Typ	Max	Unit
Output On Voltage	V_{out}	$I_{out}=1\text{mA}$	—	0.1	0.3	V
Output Leakage Current	I_{off}	$V_{out}=5.5\text{V}$, $B < B_{rp}$	—	<0.1	1	μA
Supply Current	$I_{dd(en)}$	Chip enable	—	3	6	mA
	$I_{dd(dis)}$	Chip disable	—	5	10	μA
	$I_{dd(ave)}$	Average supply current	—	8	16	μA
Awake Time	T_{awake}		—	75	125	μs
Period	T_{period}		—	75	125	ms
Duty Cycle	D.C.		—	0.1	—	%

Magnetic Characteristics ($T_A=25^\circ\text{C}$, $V_{dd}=3\text{V}$)

(1mT=10 Gauss)


Characteristic	Symbol	Min	Typ	Max	Unit
Operate Point	B_{ops} (south pole to brand side)	-	40	60	Gauss
	B_{opn} (north pole to brand side)	-60	-40	-	
Release Point	B_{rps} (south pole to brand side)	10	30	-	
	B_{rpn} (north pole to brand side)	-	-30	-10	
Hysteresis	$B_{hy}(B_{opx} - B_{rpx})$	-	15	-	

- Notes: 9. Typical data is at $T_a = 25^\circ\text{C}$, $V_{dd} = 3\text{V}$, and for design information only.
10. Operating point and release point will vary with supply voltage and operating temperature.

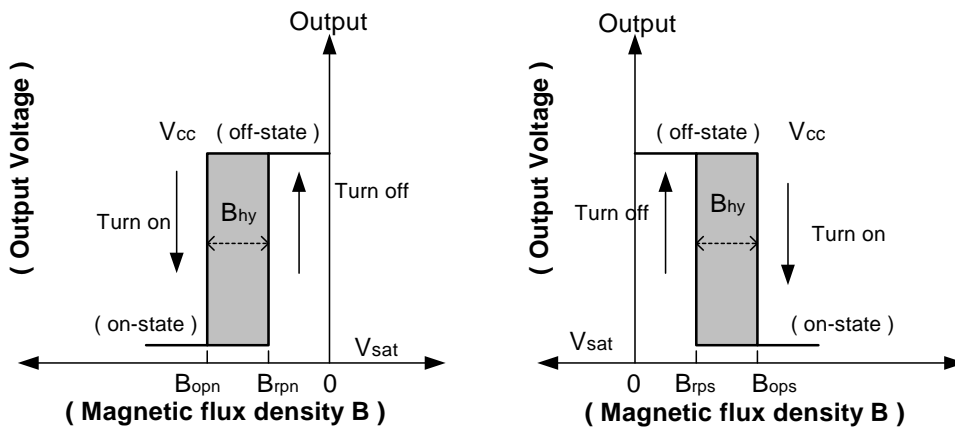


Performance Characteristics (SIP-3L)

TA (°C)	25	50	60	70	80	85	90	95	100
PD (mW)	550	440	396	352	308	286	264	242	220
TA (°C)	105	110	115	120	125	130	135	140	150
PD (mW)	198	176	154	132	110	88	66	44	0

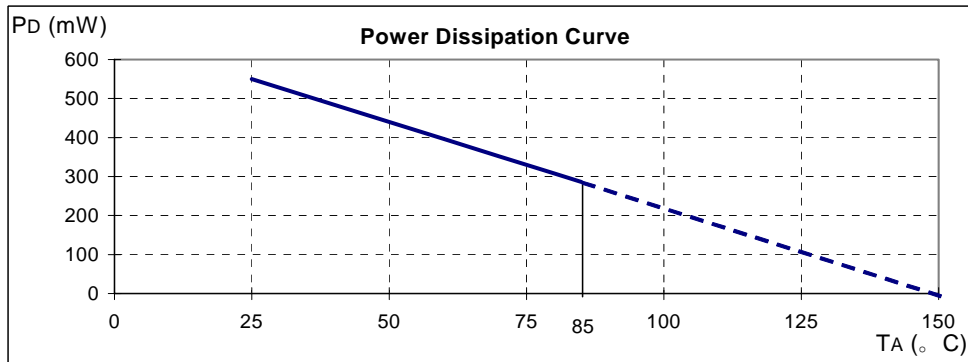

Performance Characteristics (SC59-3L/DFN2020-6)


TA (°C)	25	50	60	70	80	85	90	100	110	120	130	140	150
PD (mW)	230	184	166	147	129	120	110	92	74	55	37	18	0

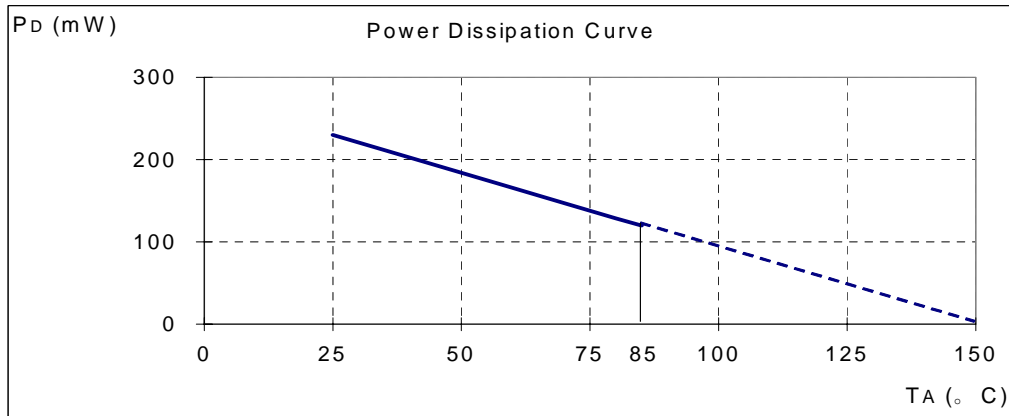

Marking Information

(1) SIP-3L


(Top View)



Y : Year: "01"= 2001
"02"= 2002
WW : Nth Week 01~52
X : Internal code a~z: Lead Free

(2) SC59

(Top View)




XX : K0: AH180
Y : Year 0~9
M : Month A~L
X : Internal code
A~Z: Green

Part Number	Package	Identification Code
AH180	SC59	K0

(3) DFN2020


(Top View)




X : Internal code
A~Z: Green
Y : Year 0~9
M : Month A~L

Package Information (unit: mm)

(1) SIP-3L

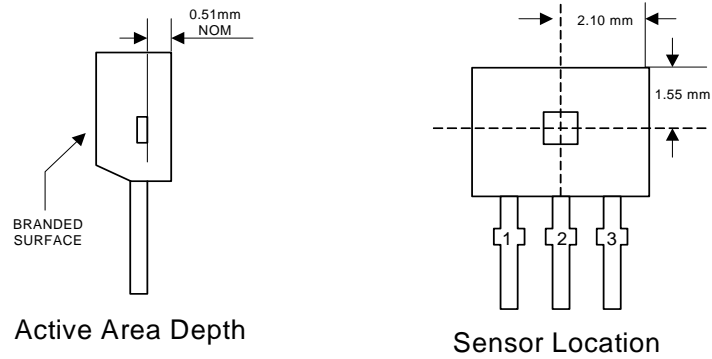


Package Dimension

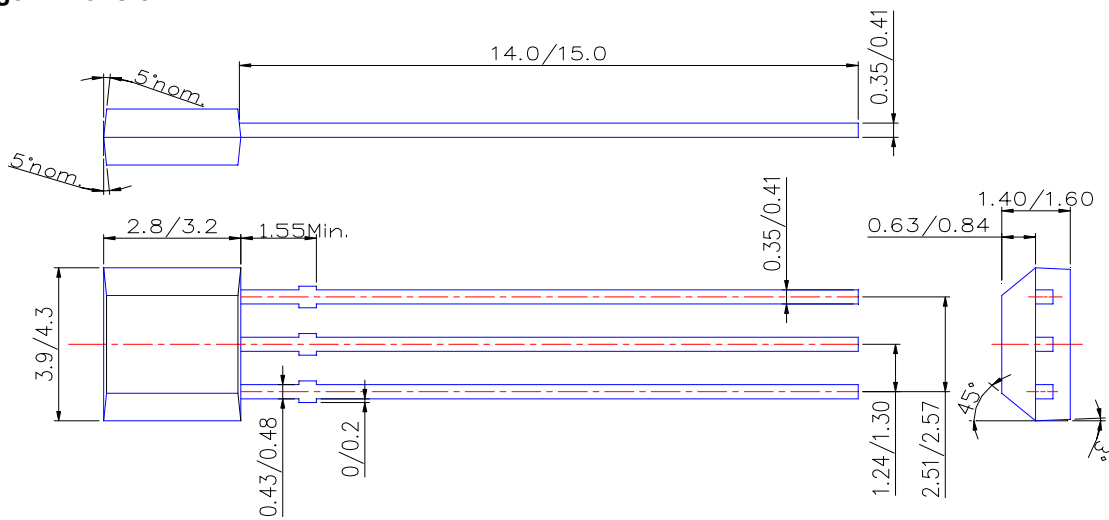


Package Information (Continued)

(2) SIP-3L for Ammo Pack-only

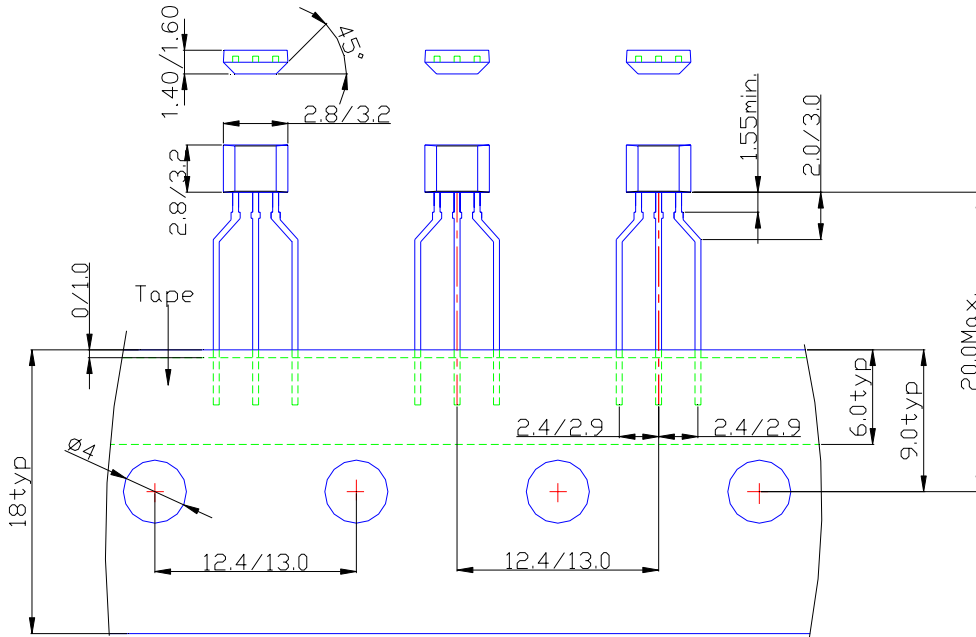


(3) SC59-3L

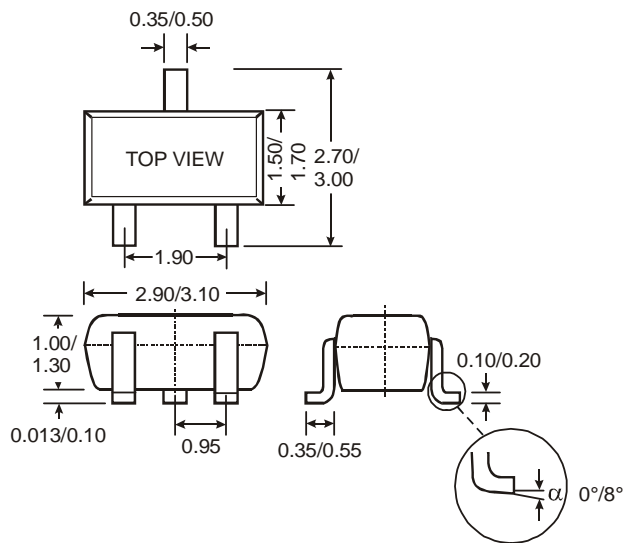

Package Information (Continued)

(4) DFN2020-6

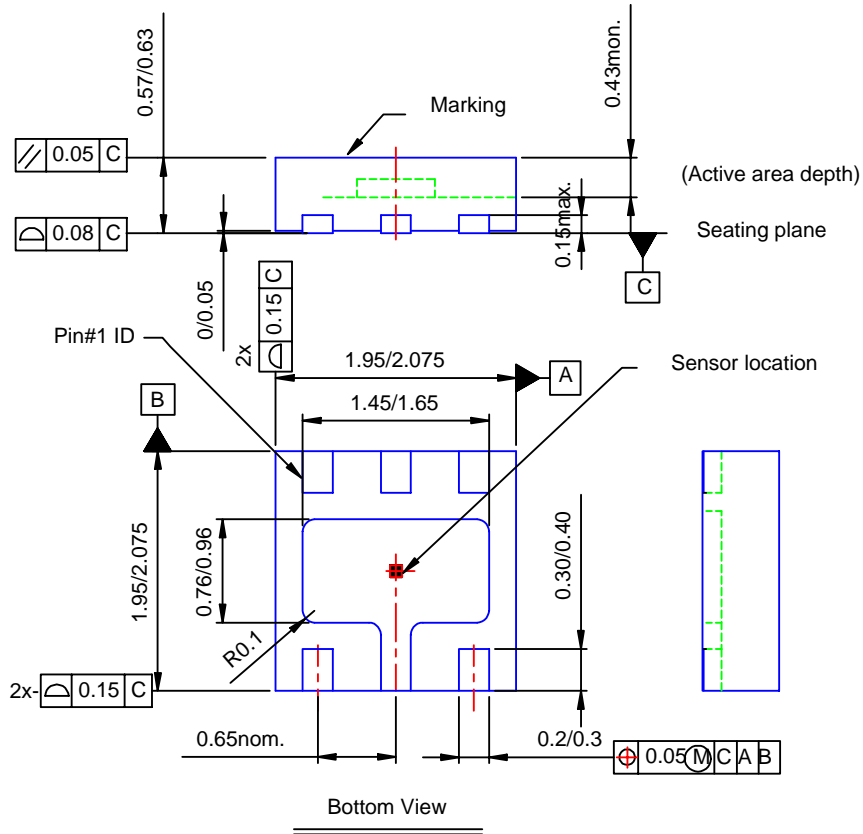

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.