


N- and P-Channel 30-V (D-S) MOSFET


PRODUCT SUMMARY			
	V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
N-Channel	30	0.105 @ $V_{GS} = 10$ V	2.5
		0.175 @ $V_{GS} = 4.5$ V	2.0
P-Channel	-30	0.200 @ $V_{GS} = -10$ V	-1.8
		0.360 @ $V_{GS} = -4.5$ V	-1.2

FEATURES


- TrenchFET® Power MOSFET
- 100% R_g Tested

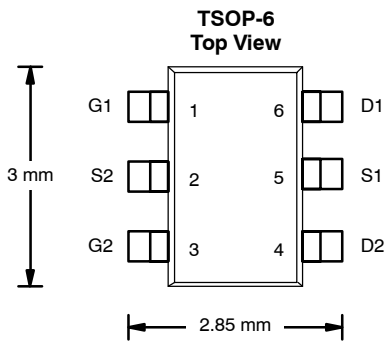

Ordering Information: Si3552DV-T1

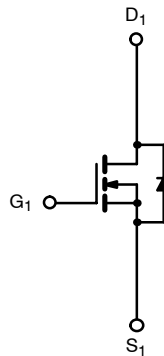

N-Channel MOSFET

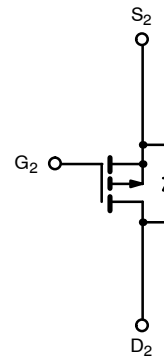

P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)				
Parameter	Symbol	N-Channel	P-Channel	Unit
Drain-Source Voltage	V_{DS}	30	-30	V
Gate-Source Voltage	V_{GS}	± 20	± 20	
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^{a, b}	I_D	$T_A = 25^\circ\text{C}$	2.5	A
		$T_A = 70^\circ\text{C}$	2.0	
Pulsed Drain Current	I_{DM}	8	-7	A
Continuous Source Current (Diode Conduction) ^{a, b}	I_S	1.05	-1.05	
Maximum Power Dissipation ^{a, b}	P_D	$T_A = 25^\circ\text{C}$	1.15	W
		$T_A = 70^\circ\text{C}$	0.73	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$

THERMAL RESISTANCE RATINGS				
Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	R_{thJA}	$t \leq 5$ sec	93	$^\circ\text{C}/\text{W}$
		Steady State	130	
Maximum Junction-to-Lead	R_{thJL}	75	90	

Notes

- a. Surface Mounted on FR4 Board.
b. $t \leq 5$ sec

SPECIFICATIONS (T _J = 25 °C UNLESS OTHERWISE NOTED)							
Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Static							
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	N-Ch	1.0			V
		V _{DS} = V _{GS} , I _D = -250 μA	P-Ch	-1.0			
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V	N-Ch P-Ch			±100 ±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 24 V, V _{GS} = 0 V	N-Ch			1	μA
		V _{DS} = -24 V, V _{GS} = 0 V	P-Ch			-1	
		V _{DS} = 24 V, V _{GS} = 0 V, T _J = 55 °C	N-Ch			5	
		V _{DS} = -24 V, V _{GS} = 0 V, T _J = 55 °C	P-Ch			-5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = 5 V, V _{GS} = 10 V	N-Ch	5			A
		V _{DS} = -5 V, V _{GS} = -10 V	P-Ch	-5			
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 10 V, I _D = 2.5 A	N-Ch		0.085	0.105	Ω
		V _{GS} = -10 V, I _D = -1.8 A	P-Ch		0.165	0.200	
		V _{GS} = 4.5 V, I _D = 2.0 A	N-Ch		0.140	0.175	
		V _{GS} = -4.5 V, I _D = -1.2 A	P-Ch		0.298	0.360	
Forward Transconductance ^a	g _{fs}	V _{DS} = 10 V, I _D = 2.5 A	N-Ch		4.3		S
		V _{DS} = -15 V, I _D = -1.8 A	P-Ch		2.4		
Diode Forward Voltage ^a	V _{SD}	I _S = 1.05 A, V _{GS} = 0 V	N-Ch		0.81	1.10	V
		I _S = -1.05 A, V _{GS} = 0 V	P-Ch		-0.83	-1.10	
Dynamic^b							
Total Gate Charge	Q _g	N-Channel V _{DS} = 15 V, V _{GS} = 5 V, I _D = 1.8 A P-Channel V _{DS} = -15 V, V _{GS} = -5 V, I _D = -1.8 A	N-Ch		2.1	3.2	nC
Gate-Source Charge	Q _{gs}		P-Ch		2.4	3.6	
Gate-Drain Charge	Q _{gd}		N-Ch		0.7		
			P-Ch		0.9		
Gate Resistance	R _g		N-Ch	0.5		2.4	Ω
			P-Ch	3		11	
Turn-On Delay Time	t _{d(on)}	N-Channel V _{DD} = 15 V, R _L = 15 Ω I _D ≅ 1 A, V _{GEN} = 10 V, R _G = 6 Ω P-Channel V _{DD} = -15 V, R _L = 15 Ω I _D ≅ -1 A, V _{GEN} = -10 V, R _G = 6 Ω	N-Ch		7	11	ns
Rise Time	t _r		P-Ch		8	12	
			N-Ch		9	14	
Turn-Off Delay Time	t _{d(off)}		P-Ch		12	18	
			N-Ch		13	20	
Fall Time	t _f		P-Ch		12	18	
			N-Ch		5	8	
Source-Drain Reverse Recovery Time	t _{rr}		I _F = 1.05 A, di/dt = 100 A/μs	N-Ch		35	
		I _F = -1.05 A, di/dt = 100 A/μs	P-Ch		30	60	







Notes

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.








TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

NCHANNEL

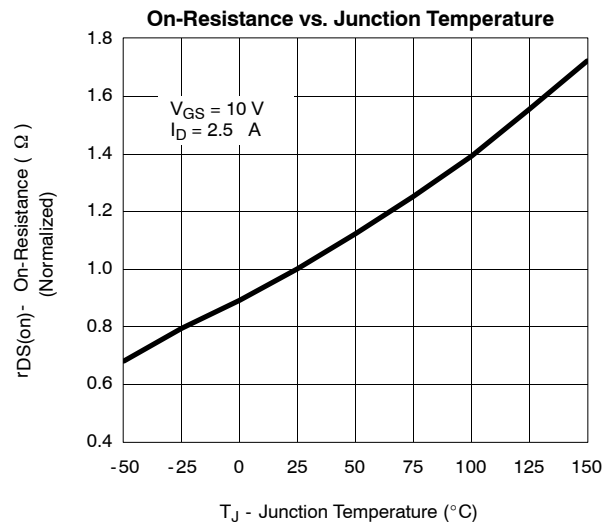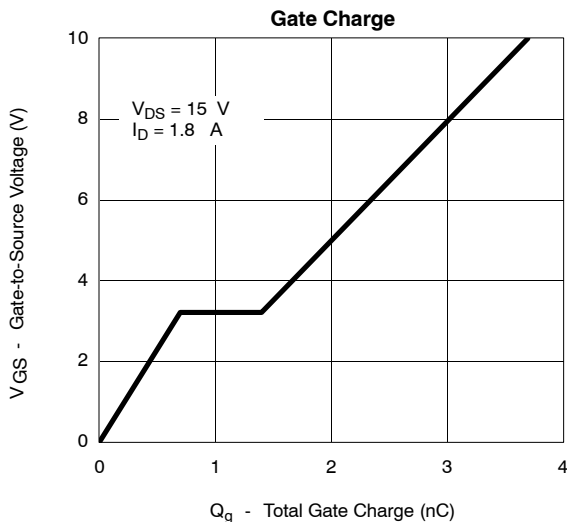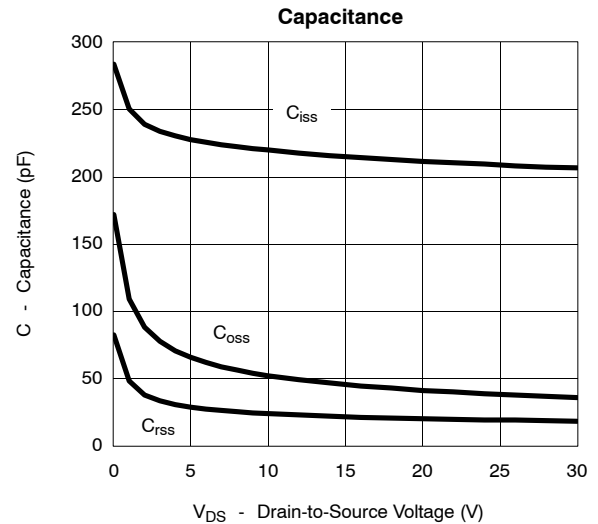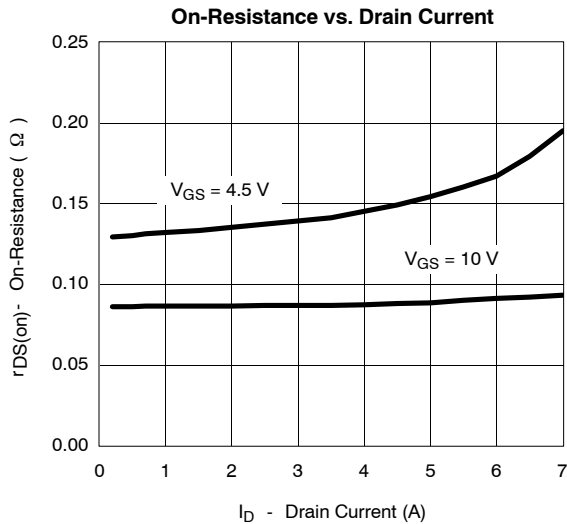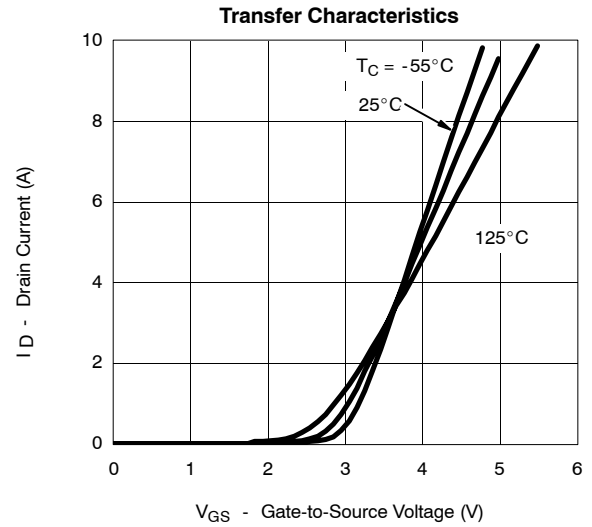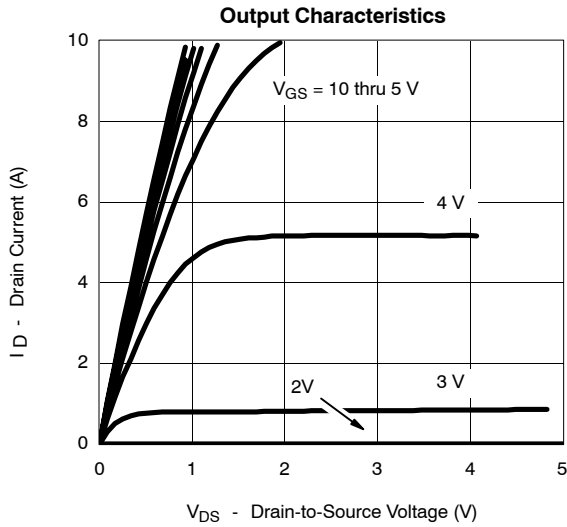

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


NCHANNEL

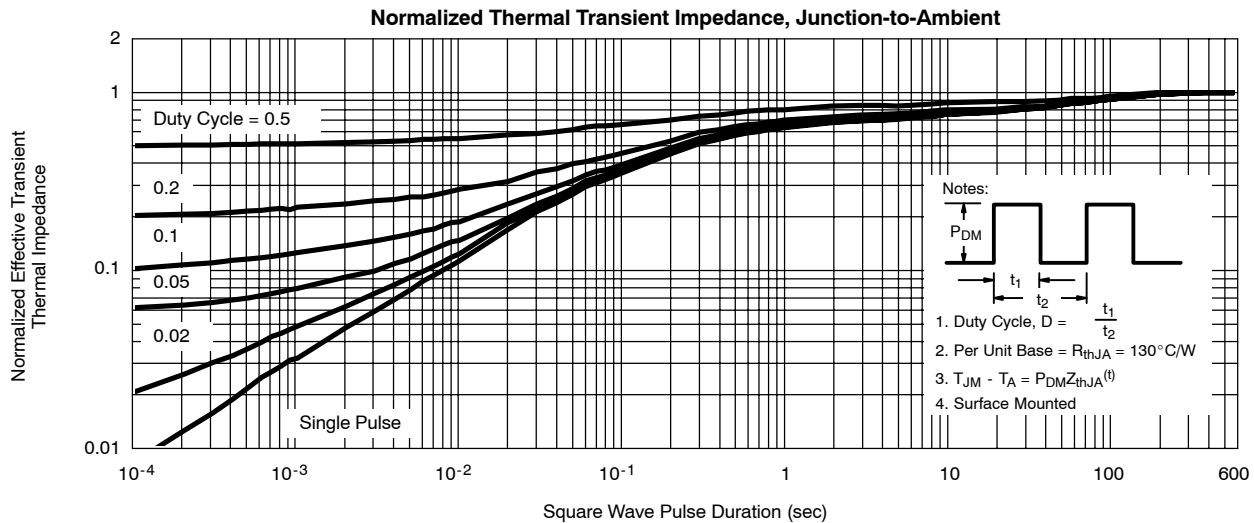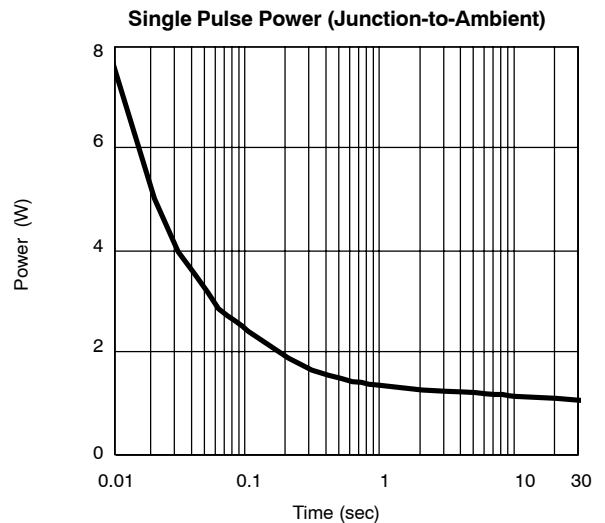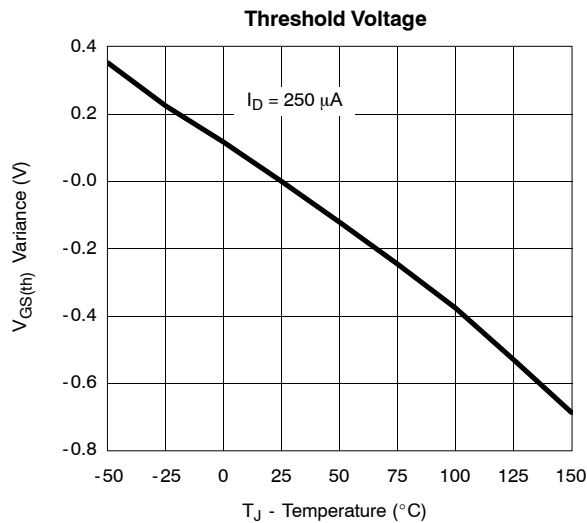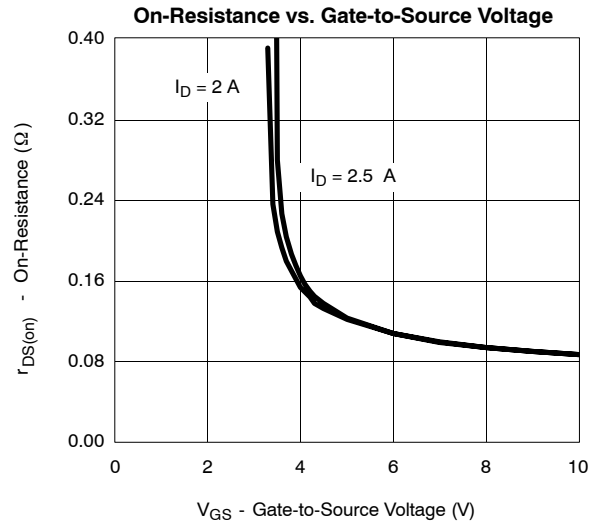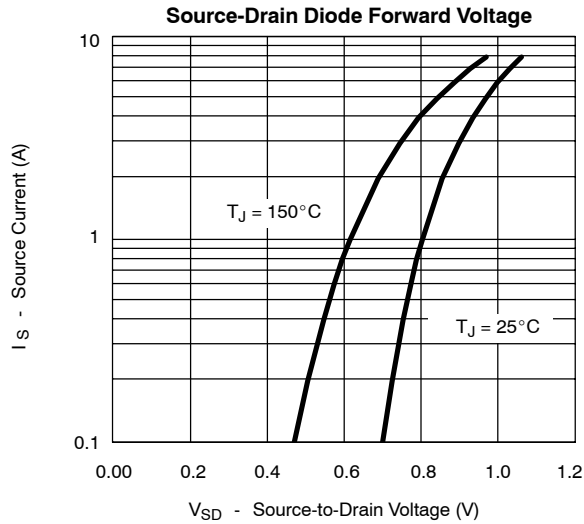







TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

NCHANNEL






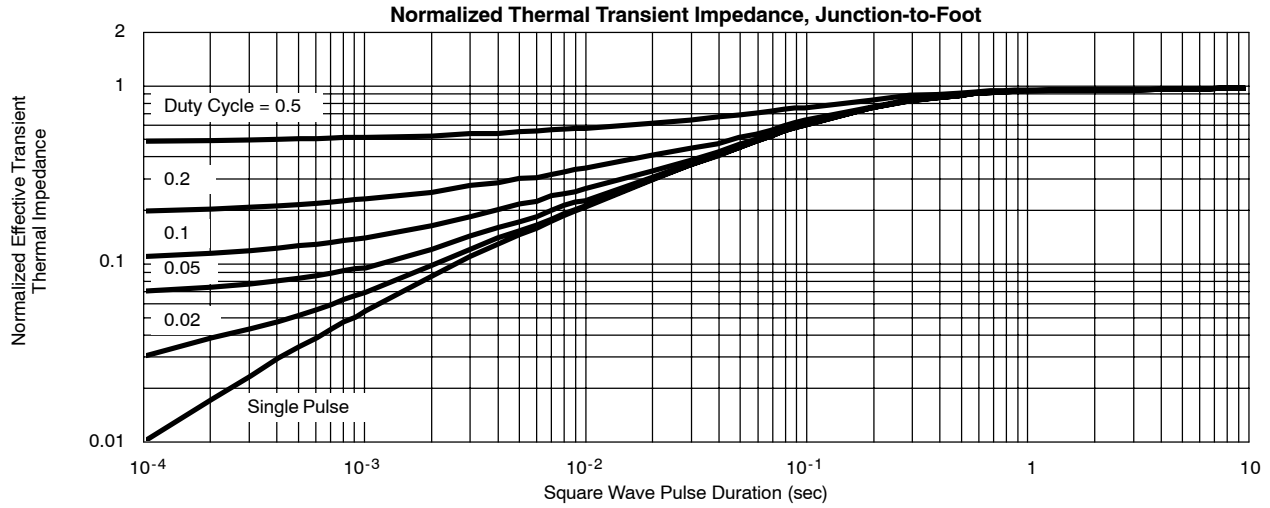


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

PCHANNEL

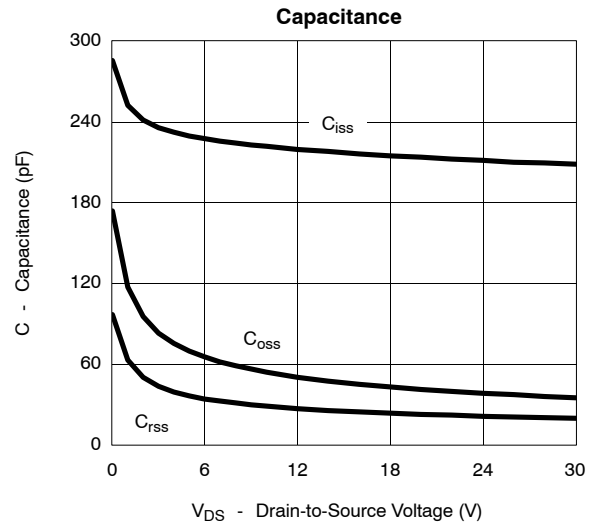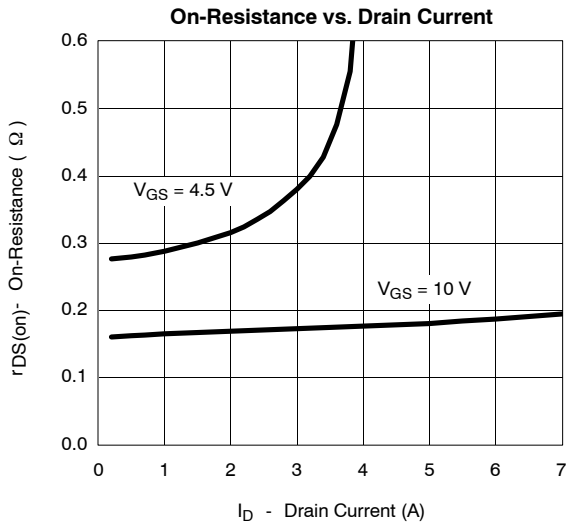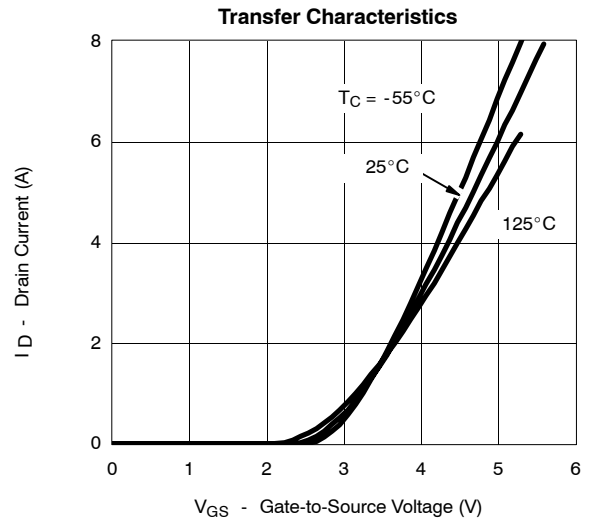
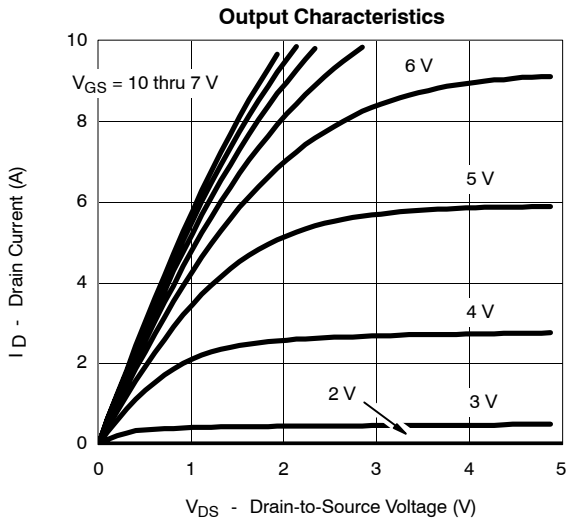


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED) PCHANNEL

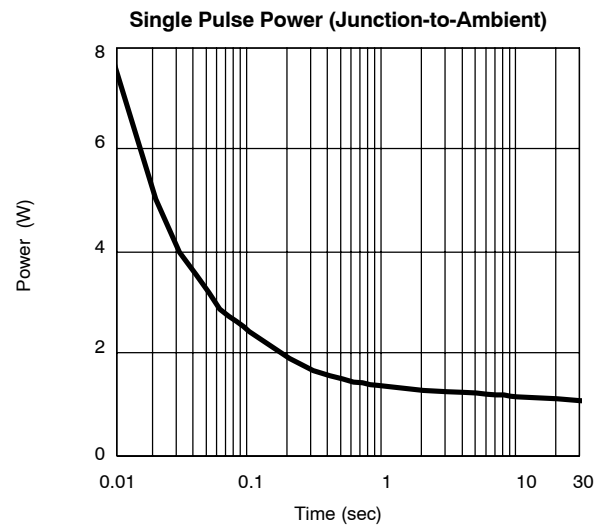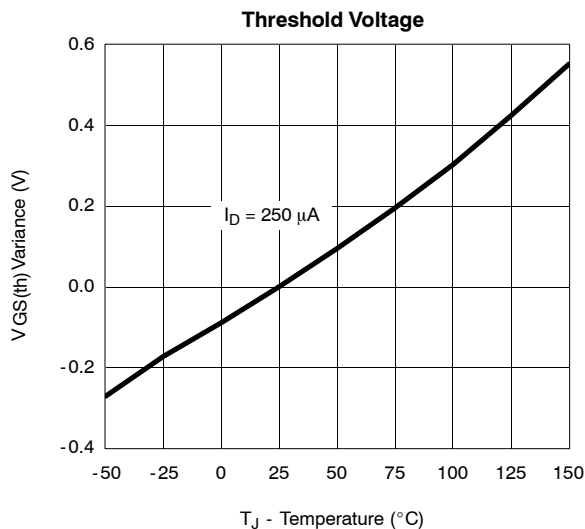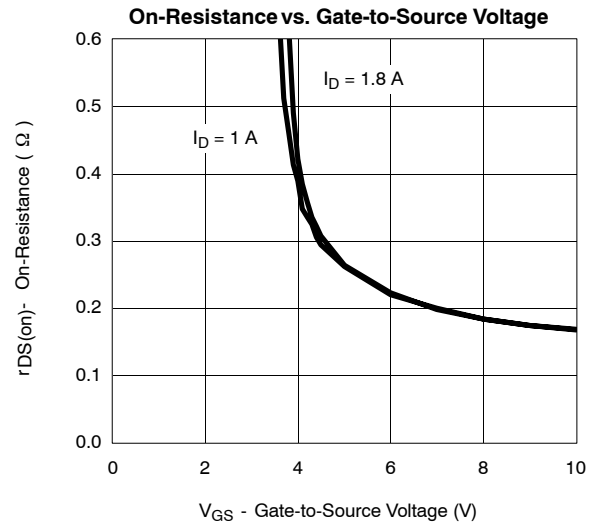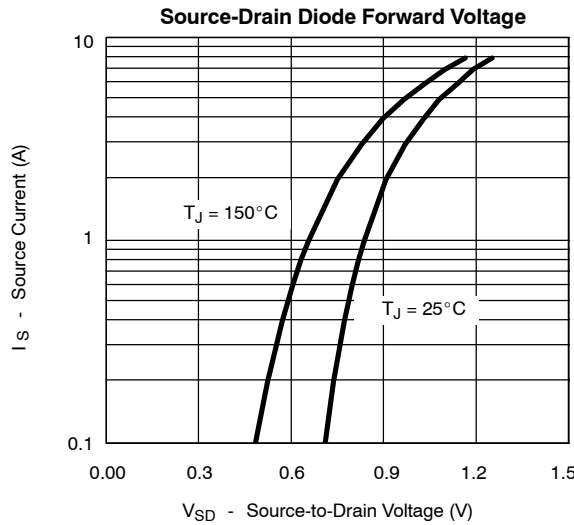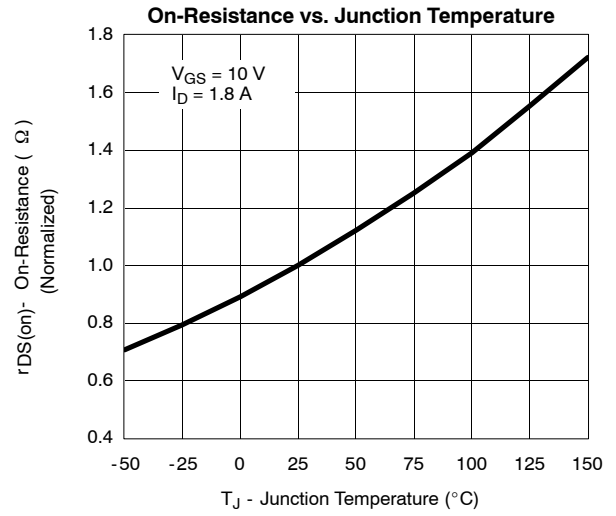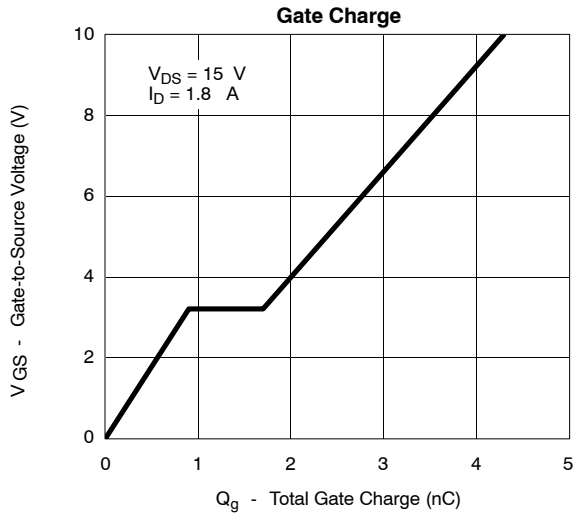



TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED) PCHANNEL

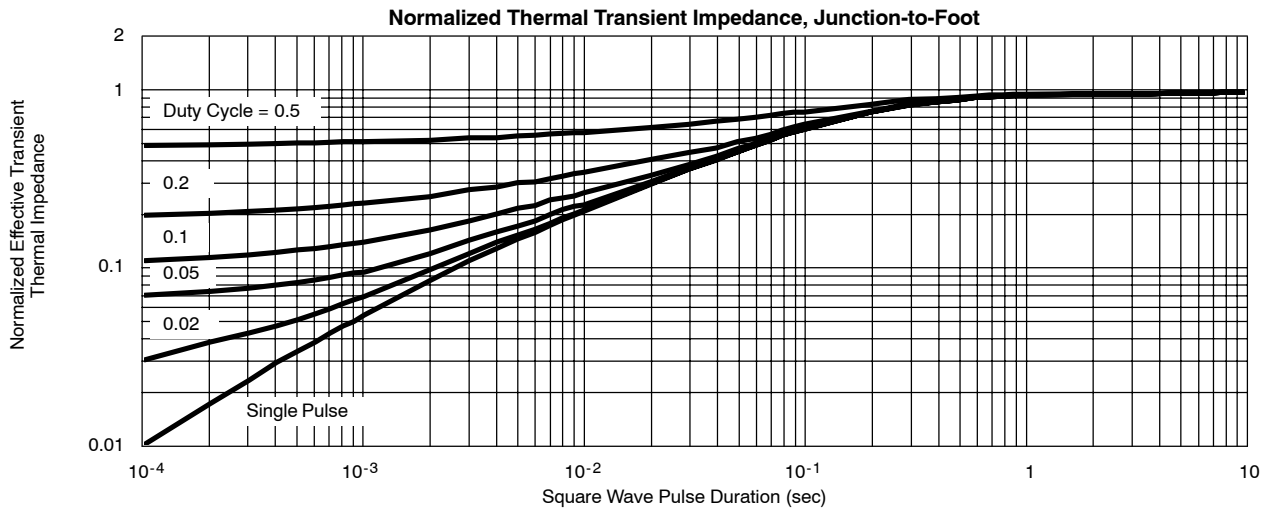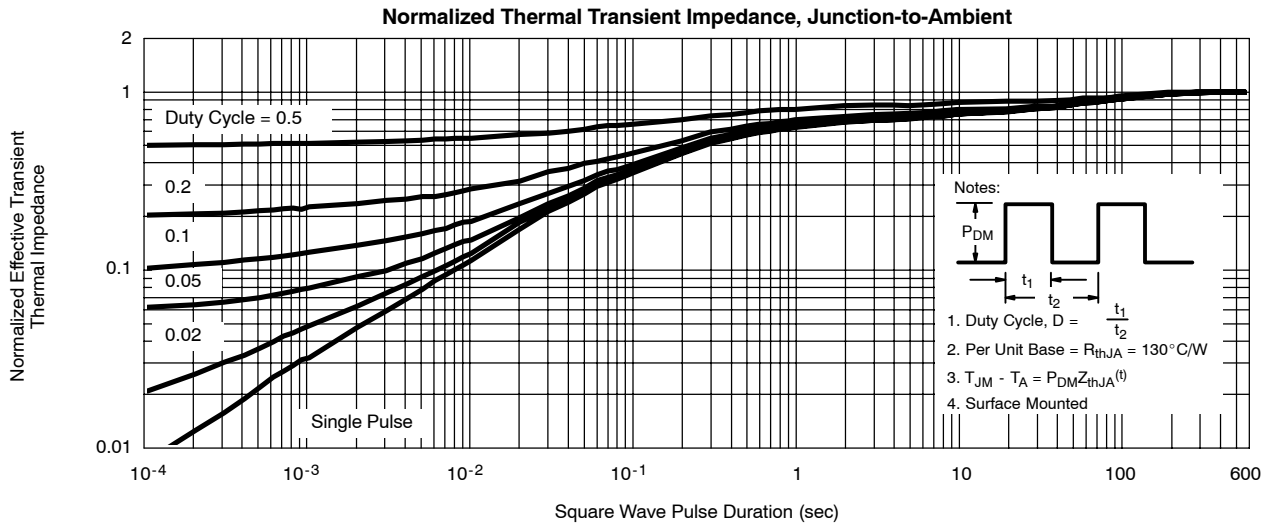



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.