

# Super Barrier Rectifier™

Using state-of-the-art SBR IC process technology,  
the following features are made possible in a single device:

## Major ratings and characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	1.0 *	A
$V_{RRM}$	20	V
$V_F @ 1A, T_J = 75^\circ C$	0.34	V, typ
$T_J$ (operating/storage)	-65 to 125	$^\circ C$


\*Note: Device mounted on a glass epoxy board,  
Board size: 50mm x 50mm,  
Land size: 6mm x 6mm

## ELECTRICAL:

- \* Low Forward Voltage Drop
- \* Low Reverse Leakage
- \* Reliable High Temperature Operation
- \* Super Barrier Design
- \* Softest, fast switching capability
- \* 125 $^\circ C$  Operating Junction Temperature

## MECHANICAL:

- \* Molded Plastic SOD-323 package

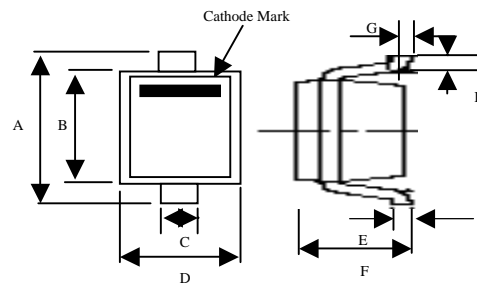

SOD-323		
Di	Min	Max
A	2.30	2.70
B	1.60	1.80
C	0.25	0.40
D	1.15	1.45
E	0.10	0.18
F	0.85	1.05
G	-	0.10
H	0.20	0.40
All Dimensions in mm		


## Maximum Ratings and Electrical Characteristics

(at 25 $^\circ C$  unless otherwise specified)


	SYMBOL			UNITS
DC Blocking Voltage	$V_{RM}$			Volts
Working Peak Reverse Voltage	$V_{RWM}$	20		
Peak Repetitive Reverse Voltage	$V_{RRM}$			
Average Rectified Forward Current (Rated $V_R$ -20Khz Square Wave) - 50% duty cycle	$I_O^{(1)}$	1		Amps
Peak Forward Surge Current - 1/2 60hz	$I_{FSM}$	18		Amps
Instantaneous Forward Voltage $I_F = 0.7A; T_J = 25^\circ C$ $I_F = 1A; T_J = 25^\circ C$ $I_F = 0.7A; T_J = 75^\circ C$	$V_F$	Typ --- 0.38 ---	Max 0.40 --- 0.34	Volts
Maximum Reverse Current at Rated $V_{RM}$ $T_J = 25^\circ C$ $T_J = 75^\circ C$	$I_R^{(2)}$	Typ --- ---	Max 0.2 2	mA mA
Operating and Storage Junction Temperature	$T_J$	-65 to +125		$^\circ C$

(1) We recommend that the worst case current be no greater than 80% of the maximum rating of  $I_O$


(2) Pulse width < 300  $\mu S$ , Duty cycle < 2%

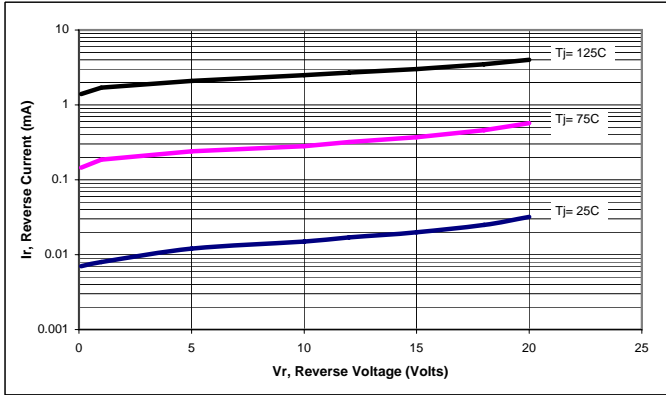

**Figure 1: Typical Reverse Current**

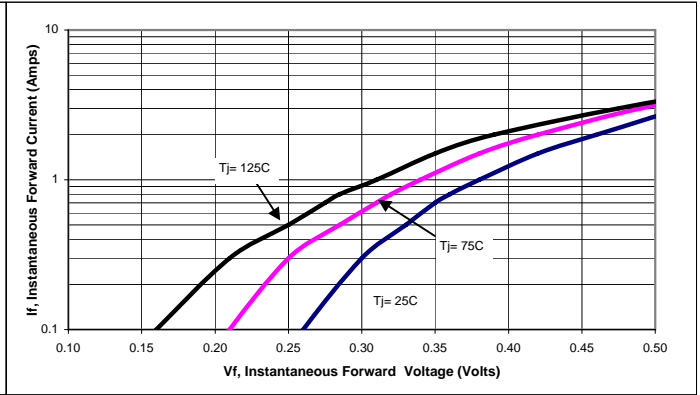


**Figure 2: Typical Forward Voltage**

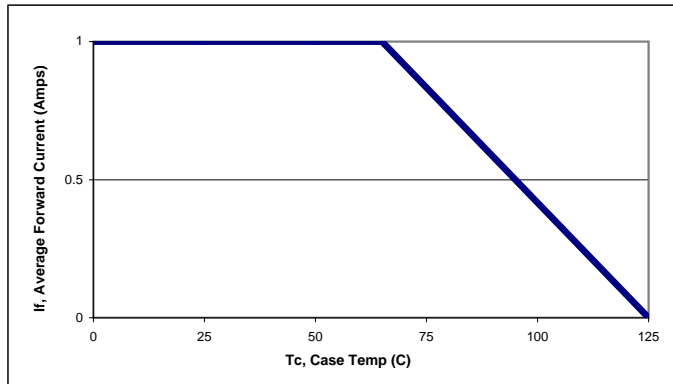

**Figure 3: Current Derating, Case\***

\*Device mounted on a 50mm x 50mm glass epoxy board, 50% duty cycle

**STANDARD SOLDERING PAD:**

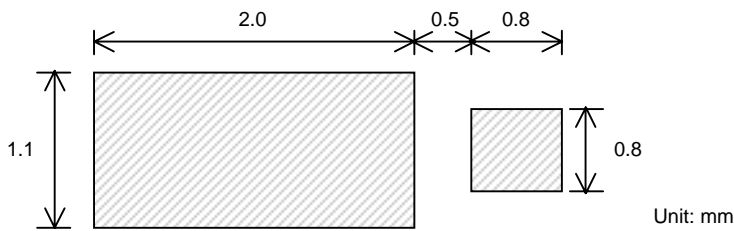

APD SEMICONDUCTOR reserves the right to make changes without further notice to any products herein. APD SEMICONDUCTOR makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does APD SEMICONDUCTOR assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in APD SEMICONDUCTOR data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. APD SEMICONDUCTOR does not convey any license under its patent rights nor the rights of others. APD SEMICONDUCTOR products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the APD SEMICONDUCTOR product could create a situation where personal injury or death may occur. Should Buyer purchase or use APD SEMICONDUCTOR products for any such unintended or unauthorized application, Buyer shall indemnify and hold APD SEMICONDUCTOR and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that APD SEMICONDUCTOR was negligent regarding the design or manufacture of the part.

**APD Semiconductor, Inc.**

1 Lagoon Drive, Suite 410, Redwood City, CA 94065, USA  
 Ph: 650 508 8896 FAX: 650 508 8865  
 Homepage: [www.apdsemi.com](http://www.apdsemi.com)  
 email: [info@apdsemi.com](mailto:info@apdsemi.com)