


Type	BDT-2108H
Rated Impedance(Ω)	$8 \pm 20\%$
Rated(Max.) Power(W)	0.1(0.15)
Resonance Frequency(Hz)	$2000 \pm 15\%$
Rated Freq. Range(Hz)	1500~5000
Sound Output at 10cm, 1.5KHz(dB)	≥ 80
Operating Temperature($^{\circ}\text{C}$)	-20~+60
Storage Temperature($^{\circ}\text{C}$)	-30~+70
Weight(g)	2.5



Unit:mm

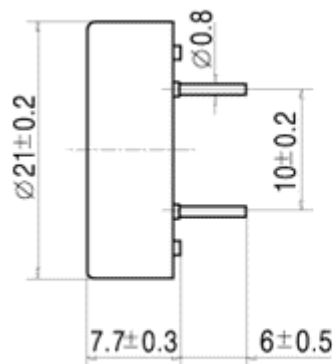