

CDBL0820-G - CDBL0860-G

Voltage: 20- 60 Volts
Current: 0.8 Amp
RoHS Device




Feature

Ideal for surface mount application
Easy pick and place
Plastic package has Underwriters Lab.
flammability classification 94V-0
Build-in strain relief

Mechanical data

Case: DO-213AA molded plastic
Terminals: solderable per MIL-STD-750,
method 2026
Polarity: Indicated by cathode band
Approx. Weight:0.036 grams

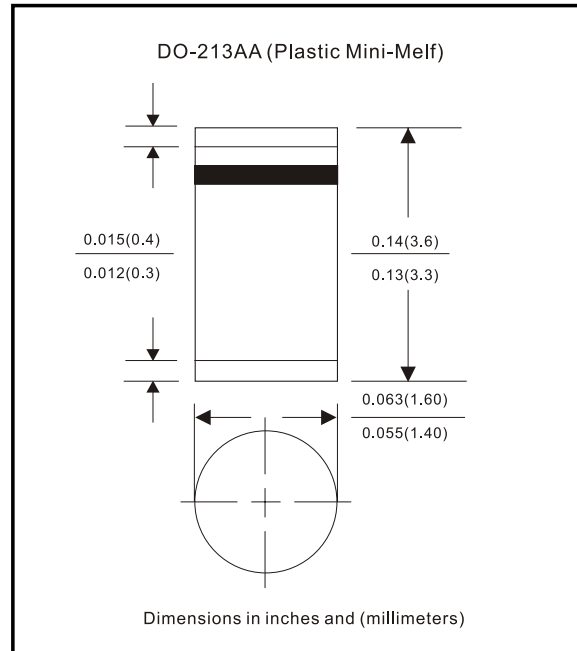

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBL0820-G	CDBL0840-G	CDBL0860-G	Unit
Max.RepetitivePeak Reverse Voltage	V_{RRM}	20	40	60	V
Max. DC Blocking Voltage	V_{DC}	14	28	42	V
Max. RMS Voltage	V_{RMS}	20	40	60	V
Peak Surge Forward Current 8.3ms single half sine-wave Sine-wave superimposed on Rate load (JEDEC)	I_{FSM}	10			A
Max. AverageForward Current	I_o	0.8			A
Max. Forward Current at 0.8 A	V_F	0.50		0.70	V
Max. Reverse Current $T_j=25\text{ C}$ $T_j=100\text{ C}$	I_R		0.5 10.0		mA
Max. Thermal Resistance (Note1)	$R_{\theta JA}$ $R_{\theta JT}$		30 75		$^{\circ}\text{C}/\text{W}$
Max. operating junction temperature	T_j		125		$^{\circ}\text{C}$
Storage temperature	T_{STG}		-55 to +150		$^{\circ}\text{C}$

Note 1: Thermal resistance from junction to ambient and junction to terminal 6.0mm² copper pads to each terminal.



RATING AND CHARACTERISTIC CURVES (CDBL0820-G-0860-G)

Fig. 1 - Typical Reverse Characteristics

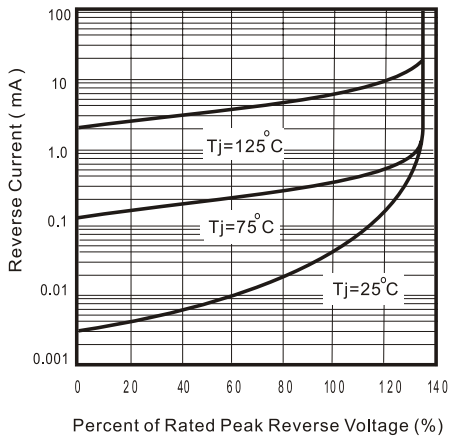


Fig. 2 - Typical Forward Characteristics

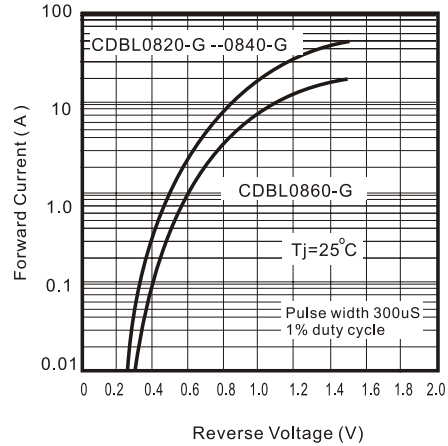


Fig. 3 - Junction Capacitance

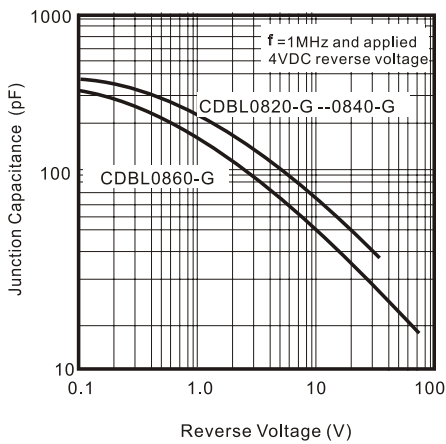


Fig. 4 - Current Derating Curve

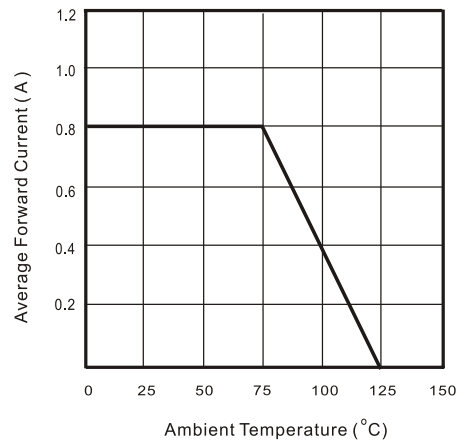


Fig. 5 - Non repetitive forward surge current

