

CMOD6263

ULTRAmi™
HIGH VOLTAGE
SCHOTTKY DIODE

ULTRAmi™



SOD-523 CASE

Central™
Semiconductor Corp.

FEATURES:

- HIGH VOLTAGE (70V)
- ULTRAmi™ PACKAGE
- LOW FORWARD VOLTAGE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMOD6263 is a High Voltage Silicon Schottky diode in an epoxy-molded ULTRAmi™ package, designed for surface mount fast switching applications requiring a low forward voltage drop.

Marking Code is 63.

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)


	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	70	V
Continuous Forward Current	I_F	15	mA
Forward Surge Current, $t_p=1.0$ s	I_{FSM}	50	mA
Power Dissipation	P_D	250	mW
Operating and Storage			
Junction Temperature	T_J, T_{stg}	-65 to +150	$^\circ\text{C}$
Thermal Resistance	θ_{JA}	500	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=50\text{V}$		98	200	nA
B_{VR}	$I_R=10\mu\text{A}$	70			V
V_F	$I_F=1.0\text{mA}$		395	410	mV
C_T	$V_R=0\text{V}, f=1.0\text{MHz}$			2.0	pF
t_{rr}	$I_R=I_F=10\text{mA}, I_{rr}=1\text{mA}, R_L=100\Omega$			5.0	ns

R0 (30-August 2001)

SOD-523 CASE - MECHANICAL OUTLINE

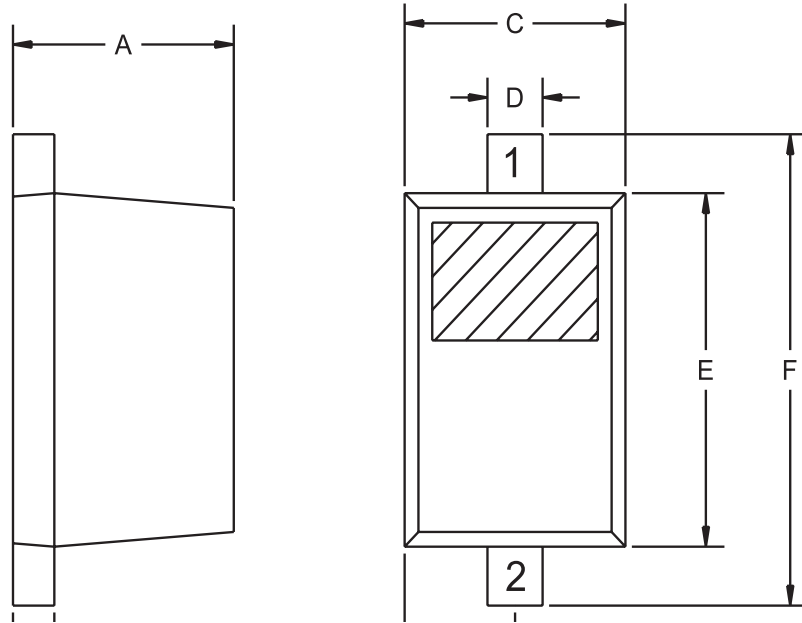

LEAD CODE:

- 1) Cathode
- 2) Anode

MARKING CODE: 63

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.020	0.031	0.50	0.80
B	0.004	0.008	0.10	0.20
C	0.028	0.035	0.70	0.90
D	0.008	0.011	0.20	0.28
E	0.039	0.055	1.00	1.40
F	0.055	0.071	1.40	1.80
G	0.016		0.40	

SOD-523 (REV: R1)