

ESJA18

(8kV/5mA)

HIGH VOLTAGE DIODE

ESJA18 is high reliability resin molded type high voltage diode in small size package which is sealed (a multilayered mesa type silicon chip) by epoxy resin.

Features

- Ultra high speed switching
- Low VF
- High surge resistivity for CRT discharge
- High reliability design
- Ultra small package

Applications

- Rectification for CRT display monitor high voltage power supply (FBT:Flyback Transformer)

Maximum Ratings and Characteristics


- Absolute Maximum Ratings

Items	Symbols	Condition	Ratings	Units
Repetitive Peak Reverse Voltage	V_{RRM}		8	kV
Average Output Current	I_o		5	mA
Surge Current	I_{FSM}	$T_a=25^{\circ}\text{C}$, Resistive Load	0.5	A
Junction Temperature	T_j	10mS Sine-half wave peak value	120	$^{\circ}\text{C}$
Allowable Operation Case Temperature	T_c		100	$^{\circ}\text{C}$
Storage Temperature	T_{stg}		-40 to +120	$^{\circ}\text{C}$

- Electrical Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

Items	Symbols	Conditions	Retings	Units
Maximum Forward Voltage Drop	V_F	$I_F=10\text{mA}$	28	V
Maximum Reverse Current	I_R	$V_R=V_{RRM}$	2	μA
Maximum Reverse Recovery Time	t_{rr}	$T_a=25^{\circ}\text{C}$, $I_F=2\text{mA}$, $I_R=4\text{mA}$	0.045	μs
Junction Capacitance	C_j	$T_a=25^{\circ}\text{C}$, $V_R=0\text{V}$, $f=1\text{MHz}$	2	pF

Outline Drawings

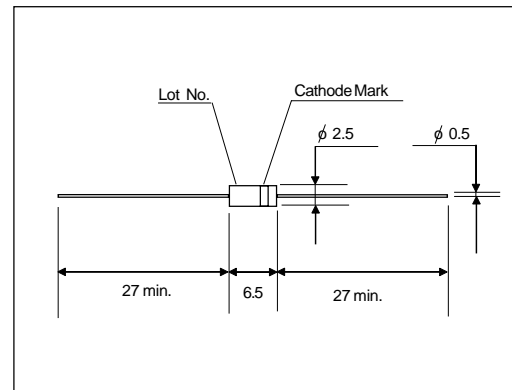

Cathode Mark

Type	Mark
ESJA18-08	

ESJA18 (8kV/5mA)

Characteristics

