

| | | |
|--|--|---------------------|
| EXAMINED BY : <i>Kevin Kuo</i> | EMERGING DISPLAY TECHNOLOGIES CORPORATION | FILE NO . CAS-10420 |
| APPROVED BY: <i>[Signature]</i> | | ISSUE : SEP.07,2005 |
| | | TOTAL PAGE : 8 |
| | | VERSION : 1 |

CUSTOMER ACCEPTANCE SPECIFICATIONS

MODEL :

162G0(WHITE LED TYPES)
(RoHS)

FOR MESSRS :

CUSTOMER'S APPROVAL

DATE :

BY :

EMERGING DISPLAY
TECHNOLOGIES CORPORATION

| | | |
|---|--------------|-------------|
| MODEL NO. 162G0(WHITE LED TYPES)(RoHS) | VERSION 1 | PAGE 0-1 |
|---|--------------|-------------|

| | | |
|---------------------|-------------------|-------------|
| RECORDS OF REVISION | DOC . FIRST ISSUE | SEP.07,2005 |
|---------------------|-------------------|-------------|

| DATE | REVISED PAGE NO. | SUMMARY |
|------|------------------------|---------|
| | | |

NUMBERING SYSTEM

| Polarizer Mode | Backlight | Code value |
|----------------|-----------|------------|
| Transflective | LED | L |
| Transmissive | LED | M |

| Backlight Color | Code Value |
|-----------------|------------|
| WHITE | W |

E W 1 6 2 G 0 B M W

| LCD type+ LCD color | Code Value |
|------------------------|---------------|
| STN+Blue | B |
| FSTN+BLACK | N |
| STN+Y-G | Y |
| STN+Gray | G |
| FSTN+White | F |

TABLE OF CONTENTS

| NO. | ITEM | PAGE |
|-----|------------------------------------|------|
| 1. | GENERAL SPECIFICATIONS ----- | 1 |
| 2. | MECHANICAL SPECIFICATIONS ----- | 1 |
| 3. | ABSOLUTE MAXIMUM RATINGS ----- | 2 |
| 4. | ELECTRICAL CHARACTERISTICS ----- | 3 |
| 5. | OPTICAL CHARACTERISTICS ----- | 4 |
| 6. | OUTLINE DIMENSIONS ----- | 5 |
| 7. | DETAIL DRAWING OF DOT MATRIX ----- | 6 |
| 8. | BLOCK DIAGRAM ----- | 6 |
| 9. | INTERFACE SIGNALS ----- | 7 |
| 10. | POWER SUPPLY ----- | 8 |
| 11. | DISPLAY DATA RAM ADDRESS ----- | 8 |

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS
PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :
EU - 002B

1.2 APPLICATION NOTES FOR CONTROLLER / DRIVER :
PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :
EU - KS0066

1.3 THIS INDIVIDUAL SPECIFICATIONS IS PRIOR TO GENERAL SPECIFICATIONS .

1.4 MATERIAL SAFETY DESCRIPTION
ASSEMBLIES SHALL COMPLY WITH EUROPEAN ROHS REQUIREMENTS, INCLUDING PROHIBITED MATERIALS/COMPONENTS CONTAINING LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, POLYBROMINATED BIPHENYLS (PBB) AND POLYBROMINATED DIPHENYL ETHERS (PBDE)

2. MECHANICAL SPECIFICATIONS

- (1) NUMBER OF CHARACTER ----- 16 CH * 2 LINES
- (2) MODULE SIZE ----- 80.0W * 36.0H * 13.0D (max.) mm
- (3) EFFECTIVE AREA ----- 66.0W * 16H mm
- (4) CHARACTER FONT ----- 5 * 7 DOTS + CURSOR
- (5) CHARACTER SIZE ----- 2.96W * 5.56H mm
- (6) CHARACTER PITCH ----- 3.55W * 5.94H mm
- (7) DOT SIZE ----- 0.56W * 0.66H mm
- (8) DOT PITCH ----- 0.60W * 0.70H mm
- (9) LCD TYPE *
- (10) DRIVING METHOD ----- 1 / 16 DUTY MULTIPLEX DRIVE
- (11) VIEWING DIRECTION ----- 6 O'CLOCK
- (12) BACK-LIGHT ----- LED ; COLOR : WHITE

* PLEASE REFER TO NUMBERING SYSTEM

3. ABSOLUTE MAXIMUM RATINGS

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS .

| PARAMETER | SYMBOL | MIN . | MAX . | UNIT | REMARK |
|----------------------------|-----------|-------|-------|------|----------|
| POWER SUPPLY FOR LOGIC | VDD – VSS | 0 | 7.0 | V | |
| POWER SUPPLY FOR LCD DRIVE | VDD – VO | 0 | 13.0 | V | |
| INPUT VOLTAGE | VI | VSS | VDD | V | |
| STATIC ELECTRICITY | — | — | 100 | V | NOTE (1) |
| LED POWER DISSIPATION | PD | — | 0.2 | W | |
| LED FORWARD CURRENT | IF | — | 50 | mA | |
| LED REVERSE VOLTAGE | VR | — | 5 | V | |

NOTE (1) : TEST METHOD AND CONDITIONS :
AFTER CHARGING UP 200 pF CAPACITOR BY STATED VOLTAGE ,
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE
MODULE .

3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS .

| I T E M | OPERATING | | STORAGE | | REMARK |
|---------------------|----------------|---------------------------------------|----------------|---|-------------------------|
| | MIN . | MAX . | MIN . | MAX . | |
| AMBIENT TEMPERATURE | - 2 0°C | 7 0°C | - 3 0°C | 8 0°C | NOTE (1), (3) |
| HUMIDITY | NOTE (2) | | NOTE (2) | | WITHOUT CONDENSATION |
| VIBRATION | — | 4 . 9 m /s ² (0 . 5 G) | — | 1 9 . 6 m /s ² (2 G) | |
| SHOCK | — | 2 9 . 4 m /s ² (3 G) | — | 4 9 0 . 0 m /s ² (5 0 G) | XYZ DIRECTIONS |
| CORROSIVE GAS | NOT ACCEPTABLE | | NOT ACCEPTABLE | | |

NOTE (1) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT
TEMPERATURE THIS PHENOMENON IS REVERSIBLE.

NOTE (2) : Ta ≤ 60°C : 90%RH (96HR MAX.)

Ta > 60°C : ABSOLUTE HUMIDITY MUST BE

LOWER THAN THE HUMIDITY OF 90%RH AT 60°C(96HR MAX.)

NOTE (3) : Ta AT -30°C: WILL BE < 48hrs

80°C: WILL BE < 168hrs

4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C

VDD = 5.0 ±0.25 V

| PARAMETER | SYMBOL | CONDITION | MIN . | TYP . | MAX . | UNIT |
|---------------------------------|--|---------------|-------|-------|-------|------|
| POWER SUPPLY VOLTAGE FOR LOGIC | VDD | — | 4.75 | 5.0 | 5.25 | V |
| H LEVEL INPUT VOLTAGE | VIH | — | 2.2 | — | — | V |
| L LEVEL INPUT VOLTAGE | VIL | — | — | — | 0.6 | V |
| H LEVEL OUTPUT VOLTAGE | VOH | -IOH = 0.2 mA | 2.4 | — | — | V |
| L LEVEL OUTPUT VOLTAGE | VOL | IOL = 1.2 mA | — | — | 0.4 | V |
| POWER SUPPLY CURRENT (LOGIC) | IDD | VDD = 5.0 V | — | 1.0 | 3.0 | mA |
| RECOMMENDED LCD DRIVING VOLTAGE | VDD - VO θy = 10°, θx = 0° DUTY = 1/16 | Ta = -20 °C | 3.9 | 4.4 | 4.9 | V |
| | | Ta = 25 °C | 3.9 | 4.4 | 4.9 | V |
| | | Ta = 70 °C | 3.9 | 4.4 | 4.9 | V |
| CLOCK OSCILLATION FREQUENCY | FOSC | Ta = 25 °C | — | 270 | — | KHz |
| LED FORWARD VOLTAGE | VF | IF = 20mA | — | 3.6 | 4 | V |
| LED FORWARD CURRENT | IF | — | — | 20 | 50 | mA |
| LED REVERSE CURRENT | IR | VR = 5V | — | — | 0.2 | mA |

5. OPTICAL CHARACTERISTICS .

Ta = 25 °C

VDD = 5.0 ±0.25V

| I T E M | SYMBOL | | CONDITION | Ta = 25 °C | | | UNIT | NOTE | |
|--------------------------|---------------|------|--|----------------------|-------|-------|-------------------|-------|---|
| | | | | MIN . | TYP . | MAX . | | | |
| VIEWING ANGLE | θ_{y+} | | K * | $\theta_{x=0^\circ}$ | (53) | (58) | — | deg . | 1 |
| | θ_{y-} | | | | (43) | (48) | — | | |
| | θ_{x+} | | K * | $\theta_{y=0^\circ}$ | (60) | (65) | — | | |
| | θ_{x-} | | | | (60) | (65) | — | | |
| CONTRAST RATIO | K | STN | $\theta_{y-} = 10^\circ, \theta_{x} = 0^\circ$ | 2.0 | 3.0 | — | deg . | 1 | |
| | | FSTN | | 3.5 | 5.3 | — | | | |
| RESPONSE TIME | tr (rise) | | $\theta_{x} = 0^\circ$ $\theta_{y-} = 10^\circ$ | Ta = -20°C | — | 5538 | 7199 | ms | 1 |
| | | | | Ta = 25°C | — | 228 | 296 | | |
| | | | | Ta = 70°C | — | 104 | 135 | | |
| | tf (fall) | | | Ta = -20°C | — | 2316 | 3011 | | |
| | | | | Ta = 25°C | — | 174 | 226 | | |
| | | | | Ta = 70°C | — | 85 | 111 | | |
| THE BRIGHTNESS OF MODULE | L | | IF=20.0mA | 9 | 12 | — | cd/m ² | 1, 2 | |
| | | | | 6 | 8 | — | | 1, 3 | |

K* = STN : K ≥ 1.5

FSTN : K ≥ 2.0


NOTE (1) : PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATION : EU-002B

NOTE (2) : POLARIZER MODE : TRANSMISSIVE


NOTE (3) : POLARIZER MODE : TRANSFLECTIVE

6. OUTLINE DIMENSIONS

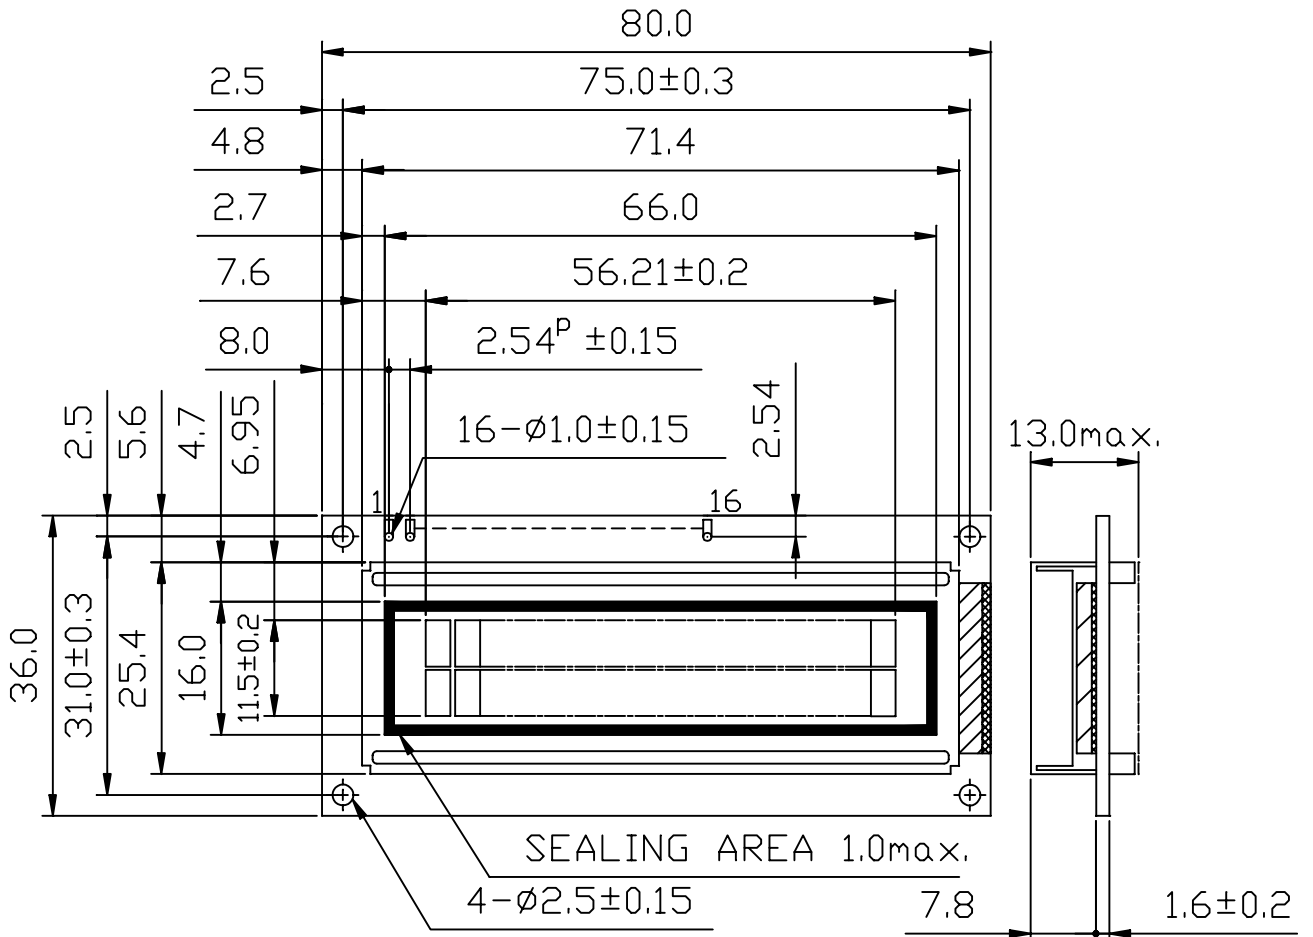


UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ±0.5

7. DETAIL DRAWING OF DOT MATRIX

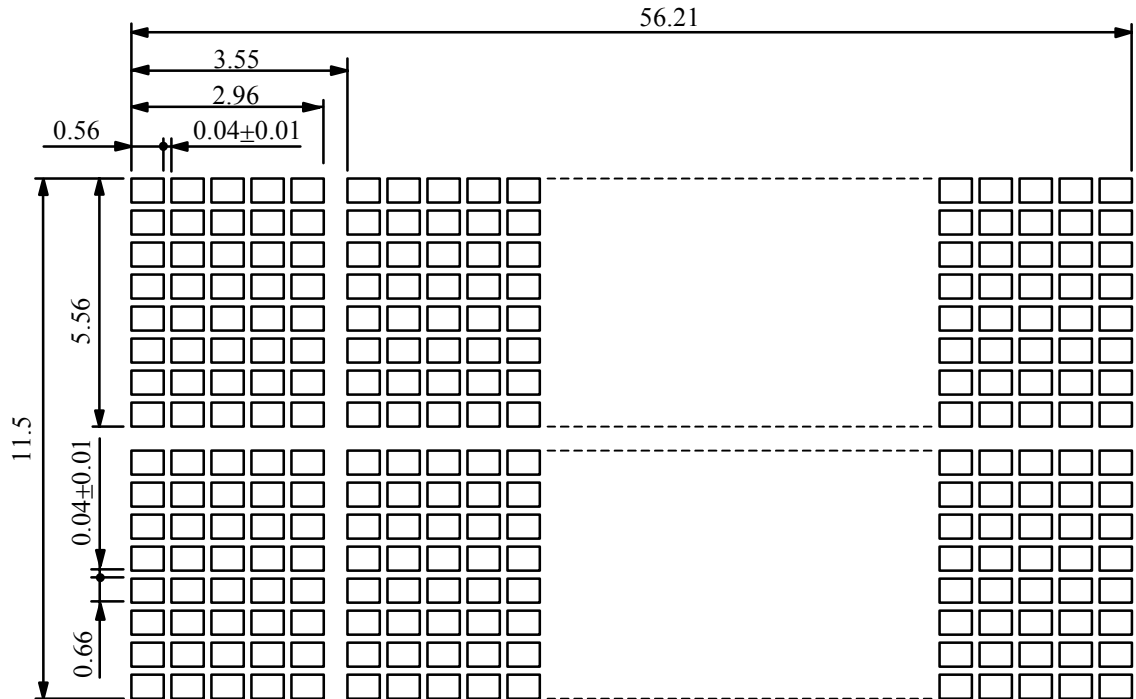

UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.1

8. BLOCK DIAGRAM

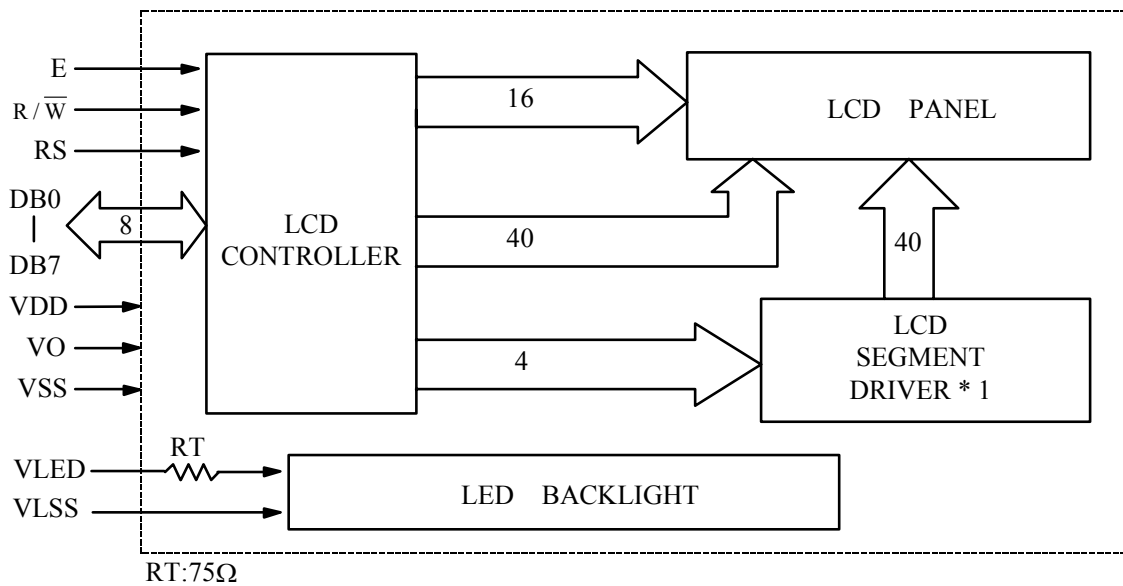


9. INTERFACE SIGNALS

| PIN NO. | SYMBOL | DESCRIPTION | FUNCTION |
|---------|--------------------|--|---|
| 1 | VSS | GROUND | 0V (GND) |
| 2 | VDD | POWER SUPPLY FOR LOGIC CIRCUIT | +5V |
| 3 | VO | LCD CONTRAST ADJUSTMENT | |
| 4 | RS | INSTRUCTION/DATA REGISTER SELECTION | RS = 0 : INSTRUCTION REGISTER RS = 1 : DATA REGISTER |
| 5 | R / \overline{W} | READ/WRITE SELECTION | R / \overline{W} = 0 : REGISTER WRITE R / \overline{W} = 1 : REGISTER READ |
| 6 | E | ENABLE INPUT | |
| 7 | DB0 | DATA INPUT/OUTPUT LINES | 4 BIT/8BIT SELECTABLE 4 BIT : DB4 - DB7 8 BIT : DB0 - DB7 |
| 8 | DB1 | | |
| 9 | DB2 | | |
| 10 | DB3 | | |
| 11 | DB4 | | |
| 12 | DB5 | | |
| 13 | DB6 | | |
| 14 | DB7 | | |
| 15 | VLED | POWER SUPPLY FOR LED BACKLIGHT (ANODE) | — |
| 16 | VLSS | POWER SUPPLY FOR LED BACKLIGHT (CATHODE) | 0V(GND) |

10. POWER SUPPLY

10.1 POWER SUPPLY FOR LCD MODULE

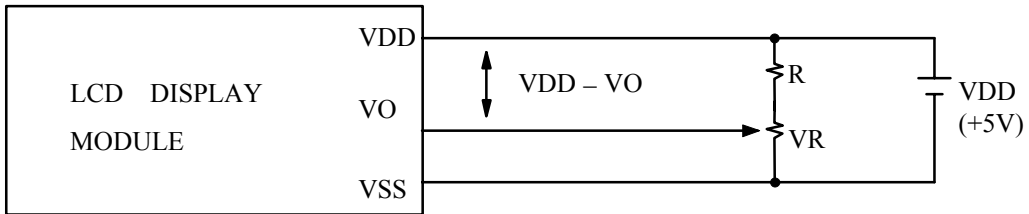


VDD - VO : LCD DRIVING VOLTAGE

VR : 10K Ω ~ 20K Ω

RECOMMENDED RESISTOR R : VDD - VO \geq 1.5 V

10.2 POWER SUPPLY FOR LED BACKLIGHT

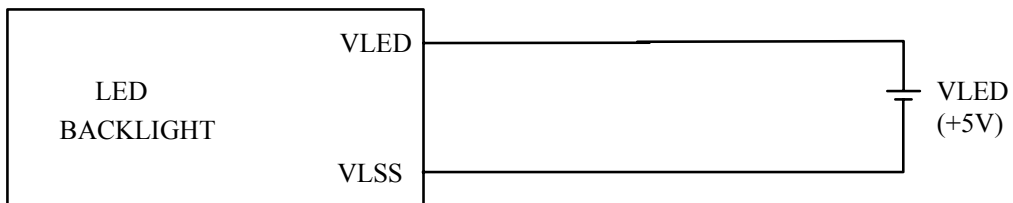

11. DISPLAY DATA RAM ADDRESS

| CHARACTER | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| LINE 1 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 | 89 | 8A | 8B | 8C | 8D | 8E | 8F |
| LINE 2 | C0 | C1 | C2 | C3 | C4 | C5 | C6 | C7 | C8 | C9 | CA | CB | CC | CD | CE | CF |