

Axial Lead and Cartridge Fuses

Midget

500 Volt Slo-Blo® Type Fuse FLQ Series




ELECTRICAL CHARACTERISTICS:

| % of Ampere Rating | Ampere Rating | Opening Time |
|--------------------|---------------|----------------------------|
| 135% | 1/10-30 | 1 hour, Maximum |
| 200% | 32/10-30 | 12 seconds, Minimum |
| | 0-3 | 5 seconds, Minimum |

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA.

INTERRUPTING RATING: 10,000 amperes at 500 VAC.

PATENTED

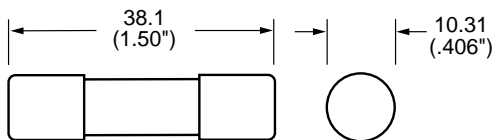

ORDERING INFORMATION:

| Cartridge Catalog Number | Ampere Rating | AC Voltage Rating | Nominal Resistance Cold Ohms |
|--------------------------|---------------|-------------------|------------------------------|
| FLQ 1/10 | .100 | 500 | 188.0 |
| FLQ 1/8 | .125 | 500 | 125.9 |
| FLQ 15/100 | .150 | 500 | 87.0 |
| FLQ 3/16 | .187 | 500 | 45.5 |
| FLQ 2/10 | .200 | 500 | 35.109 |
| FLQ 1/4 | .250 | 500 | 9.7 |
| FLQ 3/10 | .300 | 500 | 7.4 |
| FLQ 4/10 | .400 | 500 | 4.325 |
| FLQ 1/2 | .500 | 500 | 2.76 |
| FLQ 6/10 | .600 | 500 | 1.88 |
| FLQ 8/10 | .800 | 500 | 1.03 |
| FLQ 1 | 1 | 500 | .7864 |
| FLQ 1 1/8 | 1.125 | 500 | .652 |
| FLQ 1 1/4 | 1.25 | 500 | .509 |
| FLQ 1 1/2 | 1.5 | 500 | .3835 |
| FLQ 1 9/10 | 1.6 | 500 | .296 |
| FLQ 2 | 2 | 500 | .2086 |
| FLQ 2 1/4 | 2.25 | 500 | .1563 |
| FLQ 2 1/2 | 2.5 | 500 | .1381 |
| FLQ 3 | 3 | 500 | .0954 |
| FLQ 3 3/10 | 3.2 | 500 | .0938 |
| FLQ 3 1/2 | 3.5 | 500 | .0732 |
| FLQ 4 | 4 | 500 | .0618 |
| FLQ 4 1/2 | 4.5 | 500 | .0463 |
| FLQ 5 | 5 | 500 | .0348 |
| FLQ 5 9/10 | 5.6 | 500 | .0327 |
| FLQ 6 | 6 | 500 | .0284 |
| FLQ 6 1/4 | 6.25 | 500 | .0263 |
| FLQ 7 | 7 | 500 | .0212 |
| FLQ 8 | 8 | 500 | .01830 |
| FLQ 9 | 9 | 500 | .01540 |
| FLQ 10 | 10 | 500 | .01563 |
| FLQ 12 | 12 | 500 | .01176 |
| FLQ 14 | 14 | 500 | .00740 |
| FLQ 15 | 15 | 500 | .00690 |
| FLQ 20 | 20 | 500 | .004063 |
| FLQ 25 | 25 | 500 | .002920 |
| FLQ 30 | 30 | 500 | .002816 |