


POWER AMPLIFIER APPLICATIONS.

### FEATURES

- Complementary to KTC5200.
- Recommended for 100W High Fidelity Audio Frequency Amplifier Output Stage.

### MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	$V_{CBO}$	-230	V
Collector-Emitter Voltage	$V_{CEO}$	-230	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Collector Current	$I_C$	-15	A
Base Current	$I_B$	-1.5	A
Collector Power Dissipation (Tc=25°C)	$P_C$	150	W
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55~150	°C

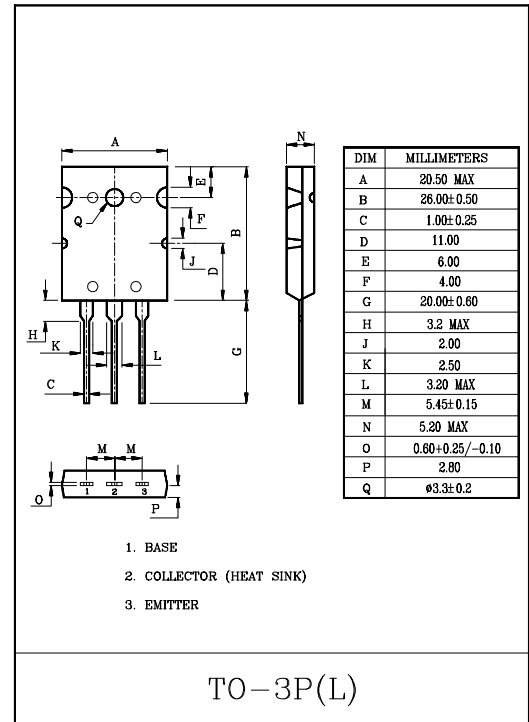

### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	$I_{CBO}$	$V_{CB}=-230V, I_E=0$	-	-	-5.0	$\mu A$
Emitter Cut-off Current	$I_{EBO}$	$V_{EB}=-5V, I_C=0$	-	-	-5.0	$\mu A$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=-50mA, I_B=0$	-230	-	-	V
DC Current Gain	$h_{FE}$ (1) (Note)	$V_{CE}=-5V, I_C=-1A$	55	-	160	
	$h_{FE}$ (2)	$V_{CE}=-5V, I_C=-7A$	35	60	-	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-8A, I_B=-800mA$	-	-1.5	-3.0	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=-5V, I_C=-7A$	-	-1.0	-1.5	V
Transition Frequency	$f_T$	$V_{CE}=-5V, I_C=-1A$	-	25	-	MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=-10V, I_E=0, f=1MHz$	-	360	-	pF

Note :  $h_{FE}$  Classification R:55~110 , O:80~160

# KTA1943

