

SHINDENGEN

Super Fast Recovery Rectifiers

Single

S3L60

600V 2.2A

FEATURES

High voltage super FRD
Low noise
trr50ns
Applicable to Automatic Insertion


APPLICATION

PFC
Switching power supply
Free Wheel
Home Appliances, Office Equipment

OUTLINE DIMENSIONS

Case : AX14

(Unit : mm)

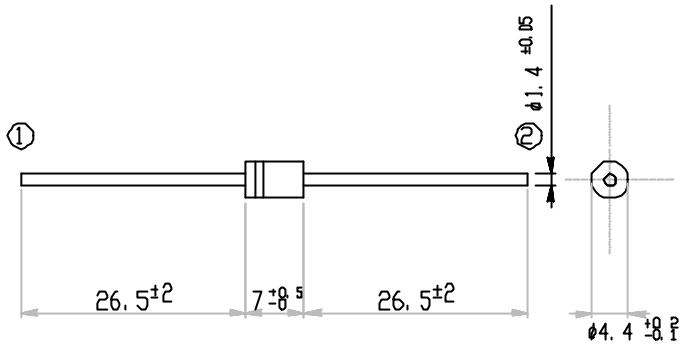

RATINGS

Absolute Maximum Ratings (If not specified TI=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 150	
Operating Junction Temperature	T _j		150	
Maximum Reverse Voltage	V _{RM}		600	V
Average Rectified Forward Current	I _o	50Hz sine wave, R-load, T _a =25	1.8	A
		50Hz sine wave, R-load, TI=132	2.2	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, T _j =25	60	A

Electrical Characteristics (If not specified TI=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =2.2A, Pulse measurement	Max.1.5	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max.10	μA
Reverse Recovery Time	trr	I _F =0.5A, I _R =1A	Max.50	ns
Thermal Resistance	j _l	junction to lead	Max.6.5	/W
	j _a	junction to ambient	Max.60	


S3L60

Forward Voltage

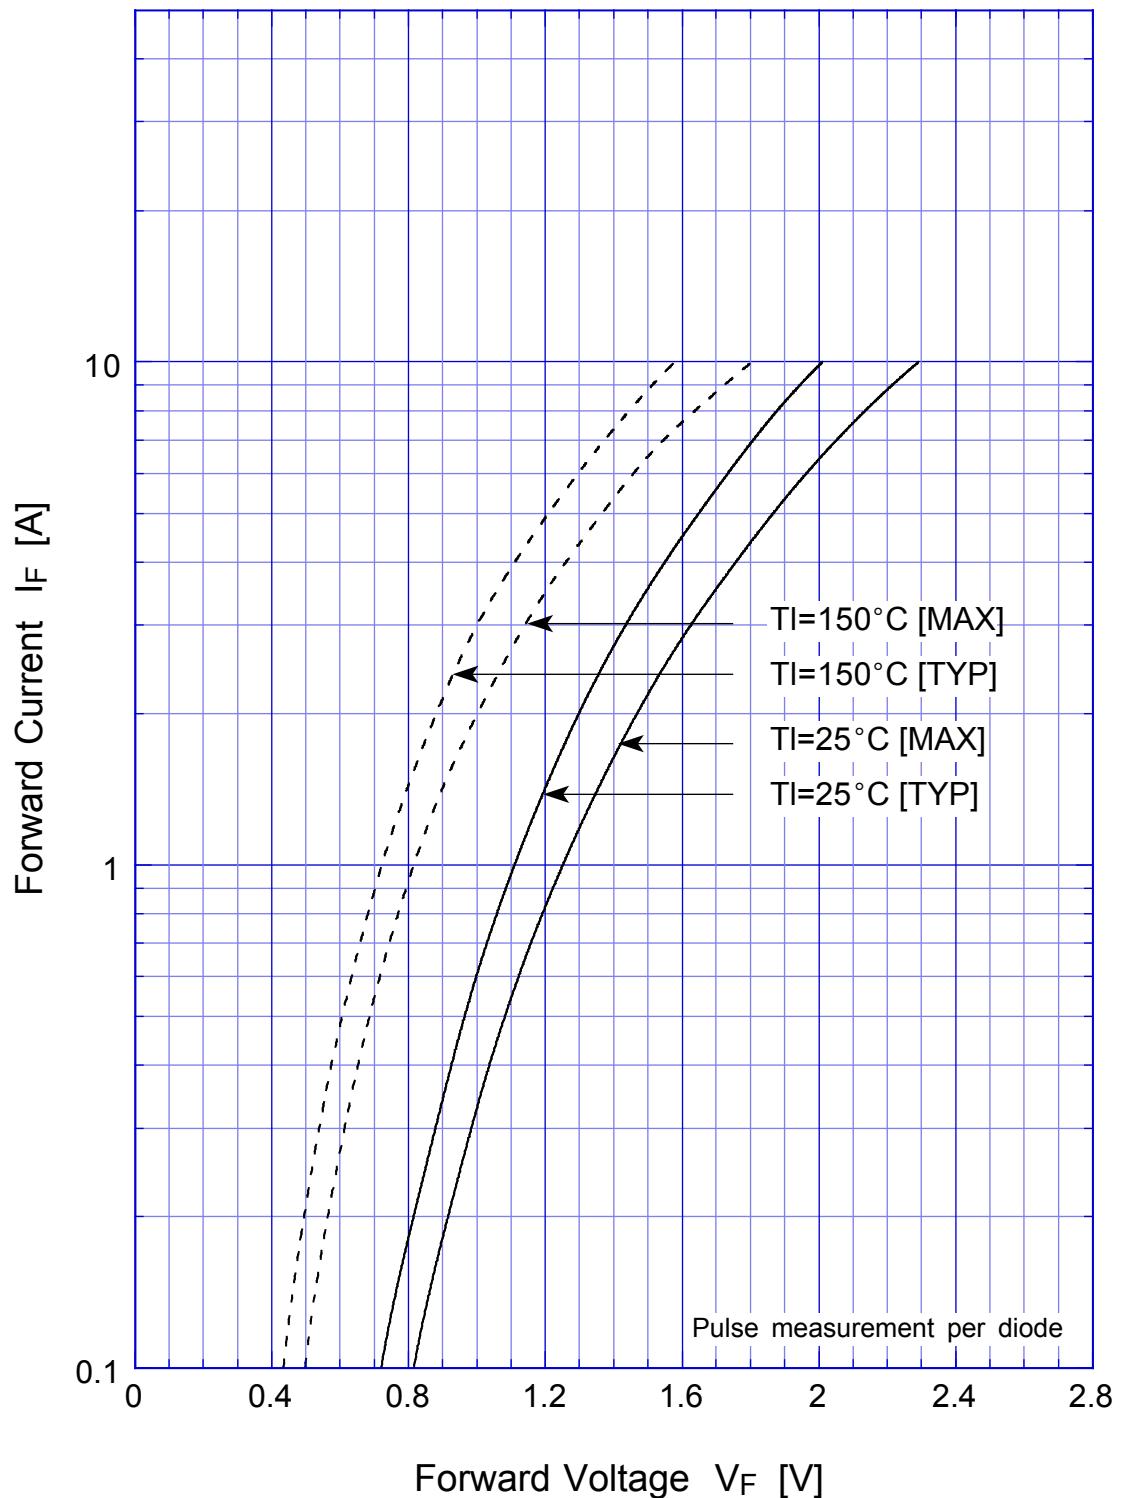




S3L60



Forward Power Dissipation

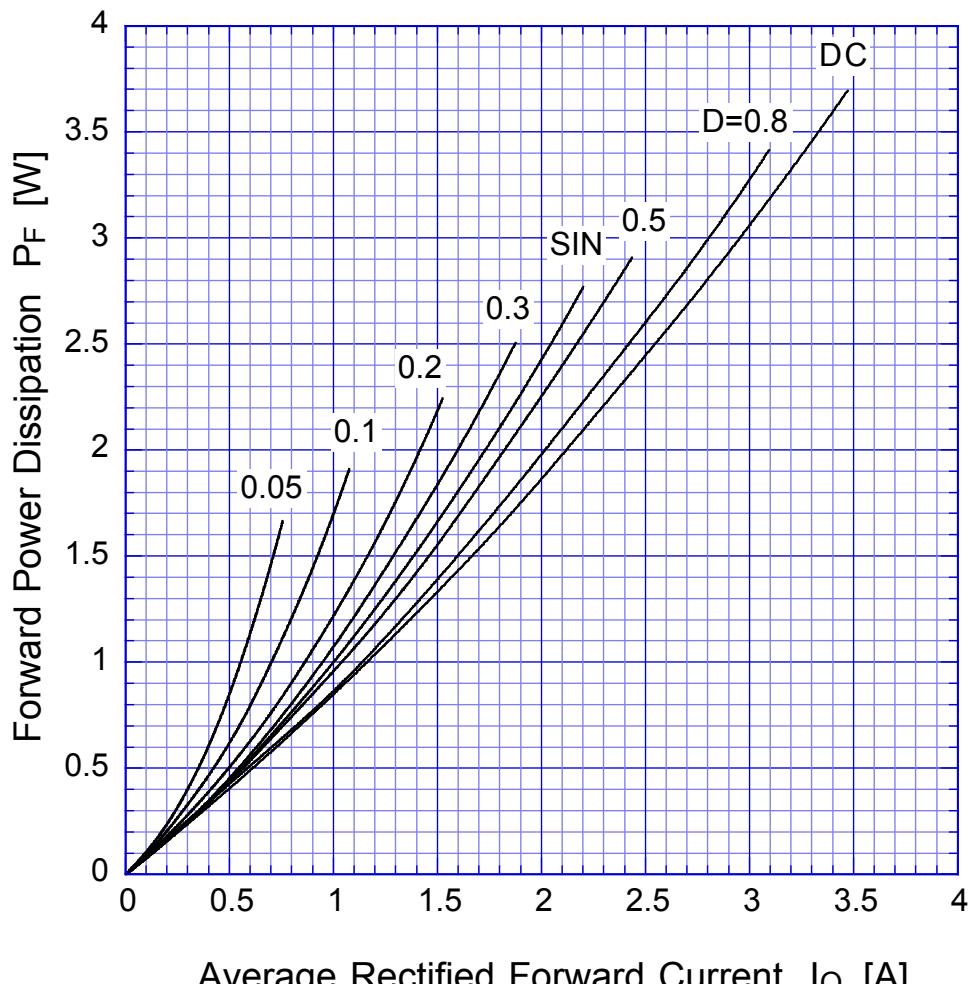

$T_j = T_{jmax}$

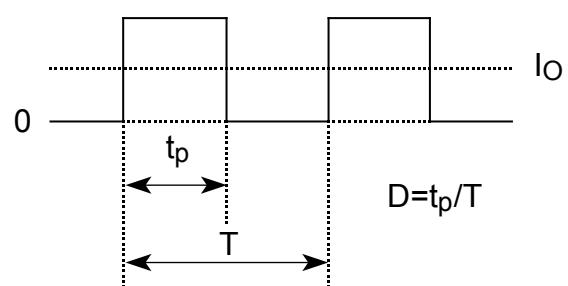

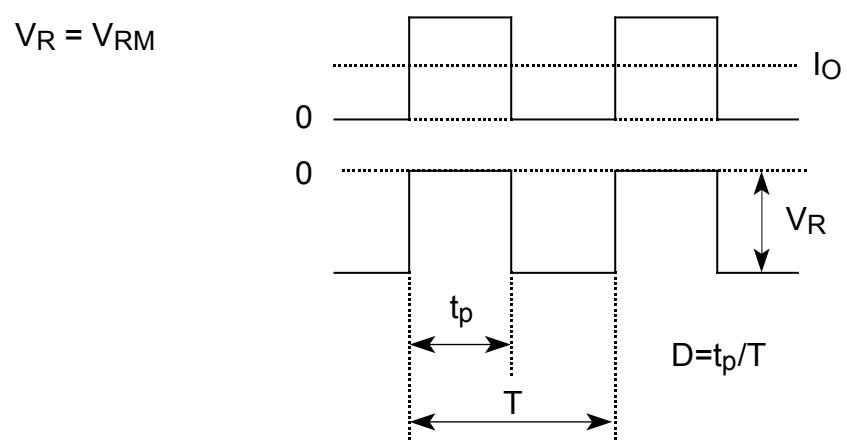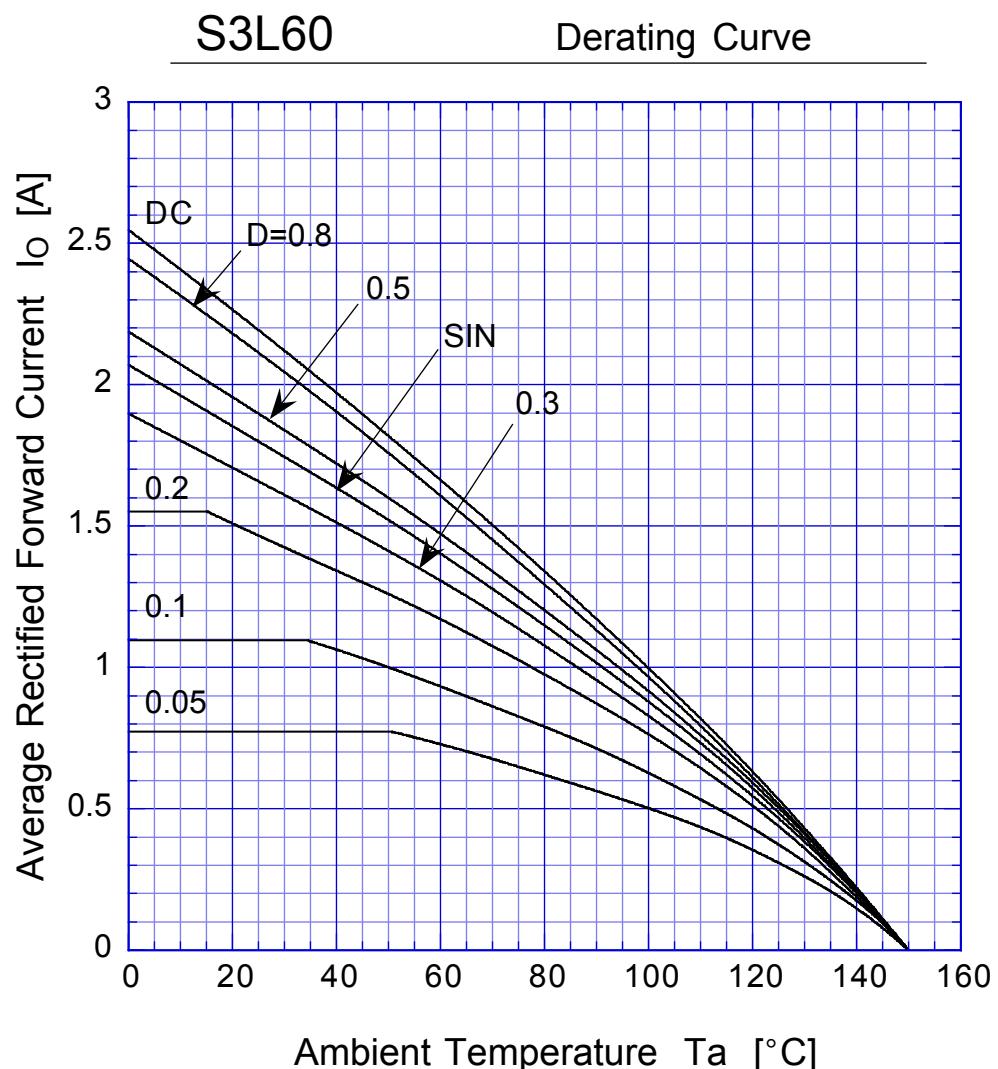

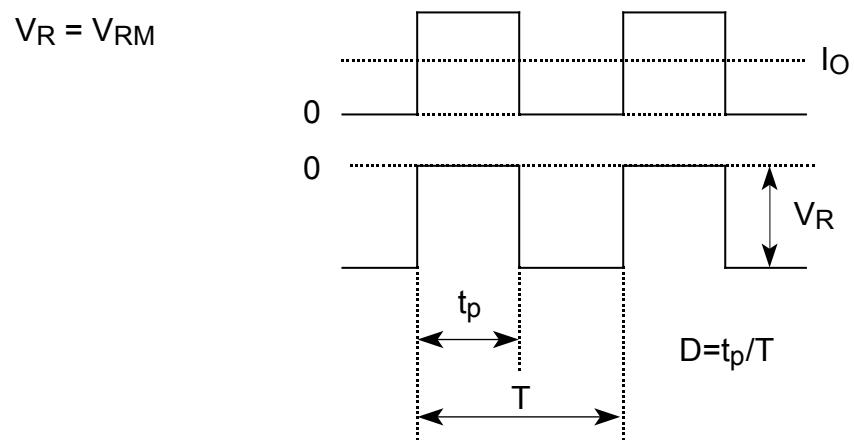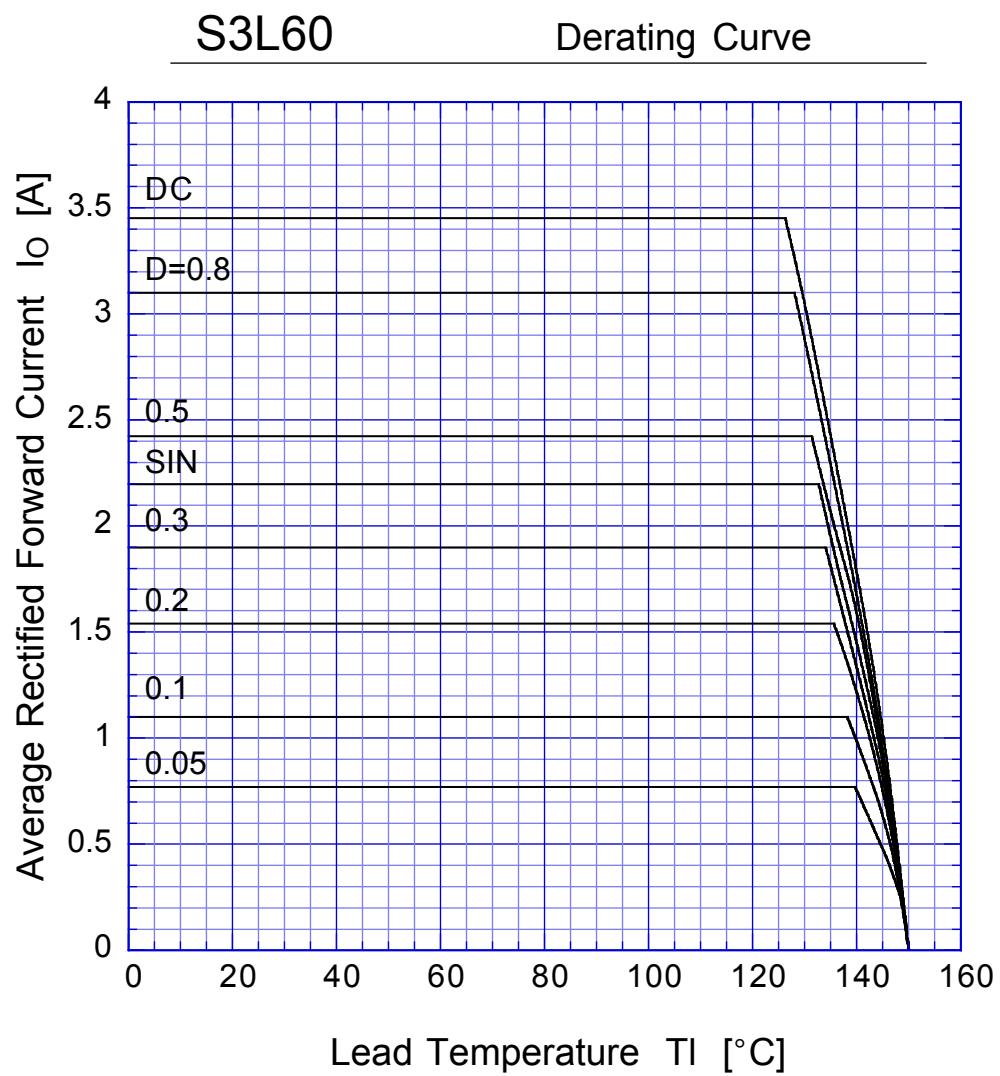

S3L60

Peak Surge Forward Capability

