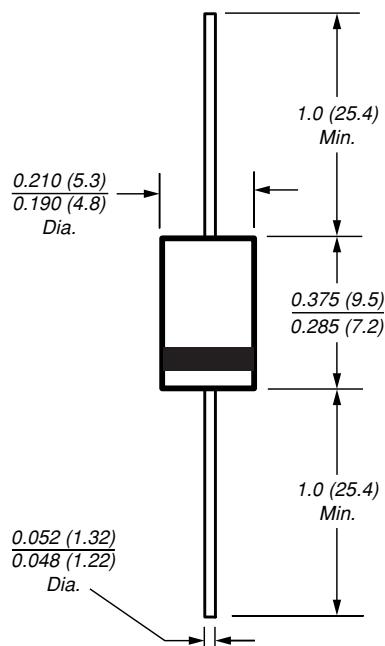


## Schottky Barrier Rectifier

 Reverse Voltage 20 to 60V  
 Forward Current 5A


Dimensions in inches and (millimeters)

### Features

- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0

### Mechanical Data

**Case:** JEDEC DO-201AD molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

 High temperature soldering guaranteed:  
 250°C/10 seconds 0.375" (9.5mm) lead length,  
 5lbs. (2.3kg) tension

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.04 oz., 1.12 g

### Maximum Ratings and Thermal Characteristics (TA = 25°C unless otherwise noted)

Parameter	Symbol	SB520A	SB530A	SB540A	SB550A	SB560A	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	V
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	V
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	V
Maximum average forward rectified current 0.375" (9.5mm) lead length (SEE FIG.1)	I <sub>F(AV)</sub>	5					A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at rated T <sub>L</sub>	I <sub>FSM</sub>	150					A
Typical thermal resistance <sup>(2)</sup>	R <sub>θJA</sub> R <sub>θJC</sub> R <sub>θJL</sub>	25 10 8					°C/W
Operating junction temperature range	T <sub>J</sub>	−65 to +125		−65 to +150		°C	
Storage temperature range	T <sub>STG</sub>	−65 to +150					°C

### Electrical Characteristics (TA = 25°C unless otherwise noted)

Parameter	Symbol	SB520A	SB530A	SB540A	SB550A	SB560A	Unit
Max. instantaneous forward voltage at 5.0A (NOTE 1)	V <sub>F</sub>	0.50		0.70		V	
Maximum instantaneous reverse current at rated DC blocking voltage <sup>(1)</sup>	I <sub>R</sub>	0.5			mA		
TA = 25°C TA = 100°C		50		25			

Notes: (1) Pulse test: 300μs pulse width, 1% duty cycle

(2) Thermal resistance junction to lead vertical P.C.B. mounted, 0.375" (9.5mm) lead length

# SB520A thru SB560A



Vishay Semiconductors  
formerly General Semiconductor

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 - Forward Current  
Derating Curve

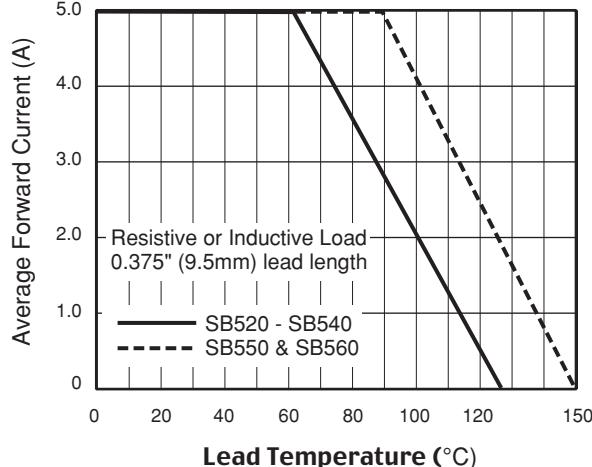


Fig. 2 - Maximum Non-repetitive Peak  
Forward Surge Current

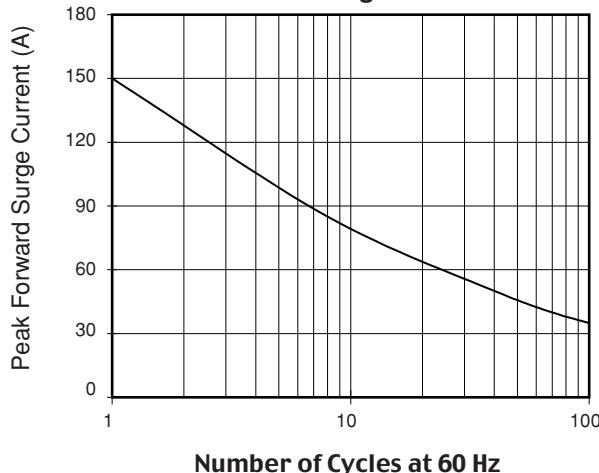


Fig. 3 - Typical Instantaneous Forward  
Characteristics

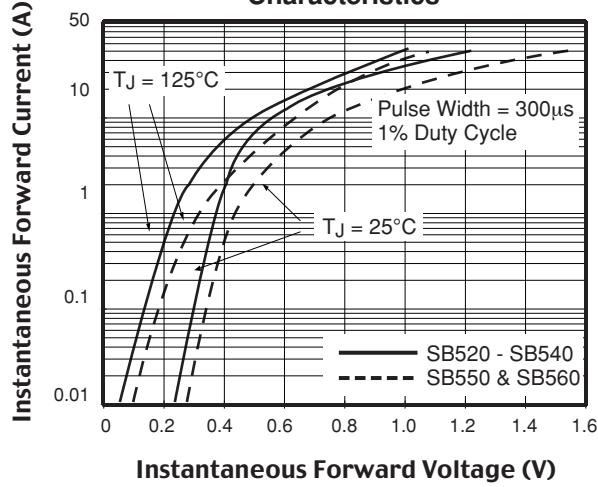


Fig. 4 - Typical Reverse  
Characteristics

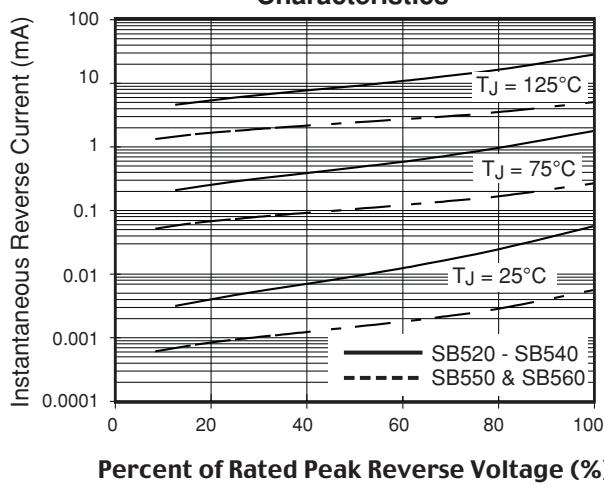


Fig. 5 - Typical Junction  
Capacitance

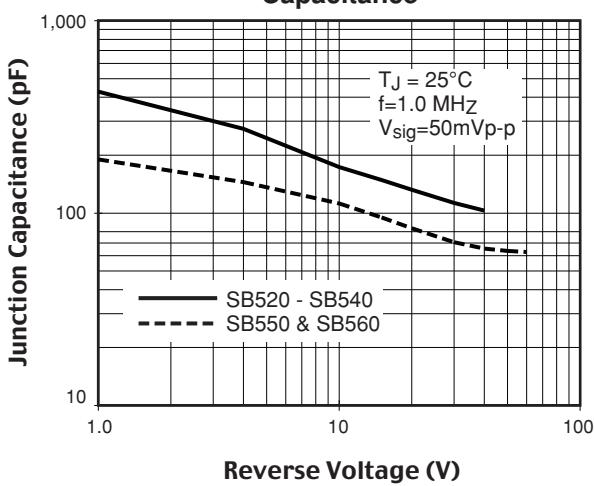


Fig. 6 - Typical Transient  
Thermal Impedance

