



TSA1036

General Purpose PNP Transistor

SOT-23  <p>Pin assignment: 1. Base 2. Emitter 3. Collector</p>	<p>BV_{CEO} = - 32V</p> <p>I_c = - 600mA</p> <p>V_{CE (SAT)} = 0.2V(typ.) @I_c / I_b = 300mA / 30mA</p>								
Features <ul style="list-style-type: none"> ◊ Driver stage of AF amplifier. ◊ General purpose switching application 	Ordering Information <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="text-align: center;">Part No.</th> <th style="text-align: center;">Packing</th> <th style="text-align: center;">Package</th> <th style="text-align: center;">Marking</th> </tr> <tr> <td style="text-align: center;">TSA1036CX</td> <td style="text-align: center;">3kpcs / Reel</td> <td style="text-align: center;">SOT-23</td> <td style="text-align: center;">2T</td> </tr> </table>	Part No.	Packing	Package	Marking	TSA1036CX	3kpcs / Reel	SOT-23	2T
Part No.	Packing	Package	Marking						
TSA1036CX	3kpcs / Reel	SOT-23	2T						
Structure <ul style="list-style-type: none"> ◊ Epitaxial planar type. ◊ Complementary to TSC2411CX 									

Absolute Maximum Rating (Ta = 25 °C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V _{CBO}	- 40V	V
Collector-Emitter Voltage	V _{CEO}	- 32V	V
Emitter-Base Voltage	V _{EBO}	- 5	V
Collector Current	I _c	- 0.6	A
Collector Power Dissipation	P _D	225	mW
Operating Junction Temperature	T _J	+150	°C
Operating Junction and Storage Temperature Range	T _{STG}	- 55 to +150	°C

Note: 1. Single pulse, Pw = 380uS, Duty <= 2%

Electrical Characteristics (Ta = 25 °C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Static						
Collector-Base Voltage	I _C = - 10uA, I _E = 0	BV _{CBO}	- 40	- 100	--	V
Collector-Emitter Breakdown Voltage	I _C = - 1mA, I _B = 0	BV _{CEO}	- 32	- 60	--	V
Emitter-Base Breakdown Voltage	I _E = - 100uA, I _C = 0	BV _{EBO}	- 5	--	--	V
Collector Cutoff Current	V _{CB} = - 20V, I _E = 0	I _{CBO}	--	--	- 1.0	uA
Emitter Cutoff Current	V _{EB} = - 4V, I _C = 0	I _{EBO}	--	--	- 1.0	uA
Collector-Emitter Saturation Voltage	I _C / I _B = - 100mA / - 10mA	V _{CE(SAT)1}	--	--	- 0.5	V
Collector-Emitter Saturation Voltage	I _C / I _B = - 300mA / - 30mA	V _{CE(SAT)2}	--	- 0.20	- 0.75	V
DC Current Transfer Ratio	V _{CE} = - 3V, I _C = 100mA	h _{FE}	82	--	390	
Transition Frequency	V _{CE} = - 10V, I _C = - 1mA, f=100MHz	f _T	--	200	--	MHz
Output Capacitance	V _{CB} = - 10V, f=1MHz	C _{ob}	--	7	--	pF

Note : pulse test: pulse width <=380uS, duty cycle <=2%

Classification Of h_{FE}				
Rank	P	Q	R	
Range	82 - 180	120 - 270	180 - 390	

Electrical Characteristics Curve

Figure 1. Current Gain vs Collector Current

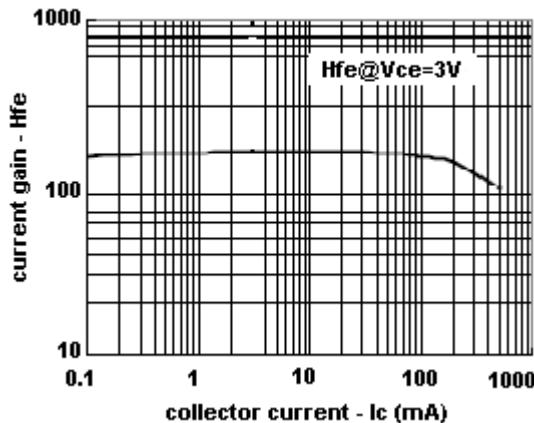


Figure 2. Saturation Voltage vs Collector Current

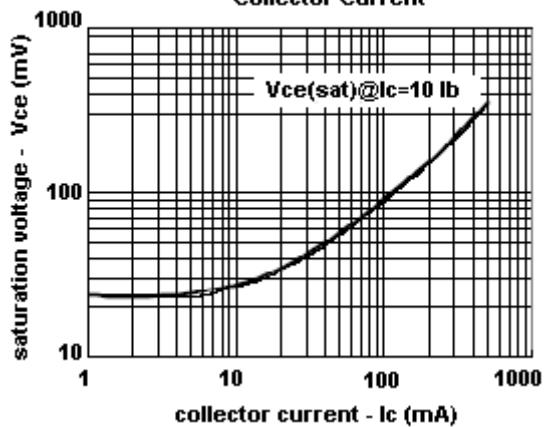


Figure 3. Saturation Voltage vs Collector Current

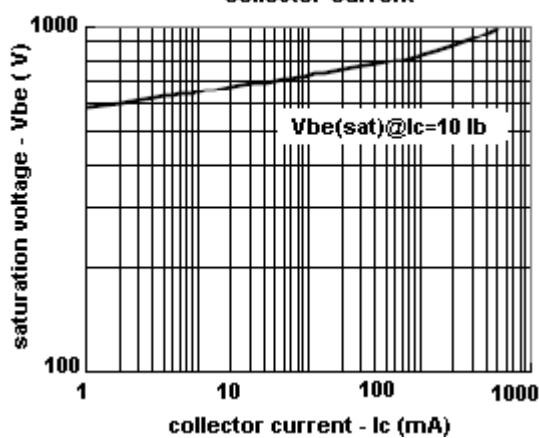


Figure 4. Power Derating Curves



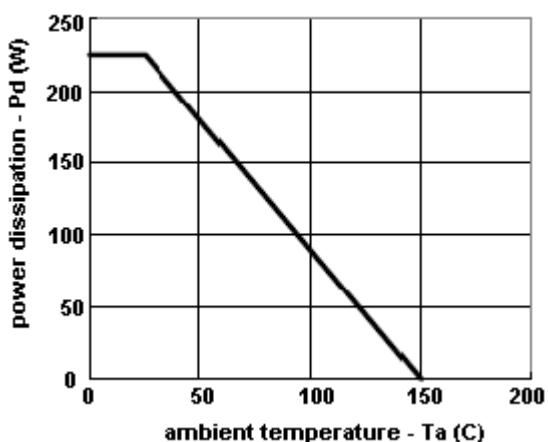


Figure 5. Cutoff Frequency vs Collector Current

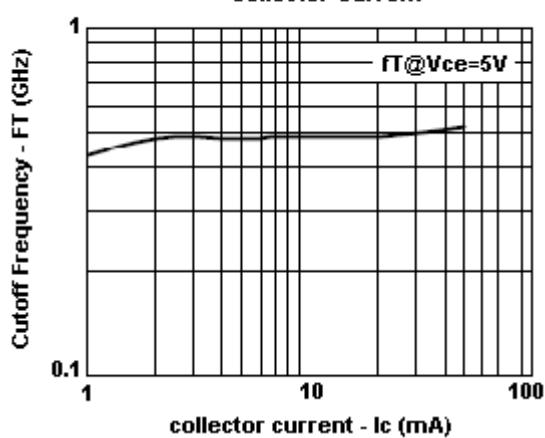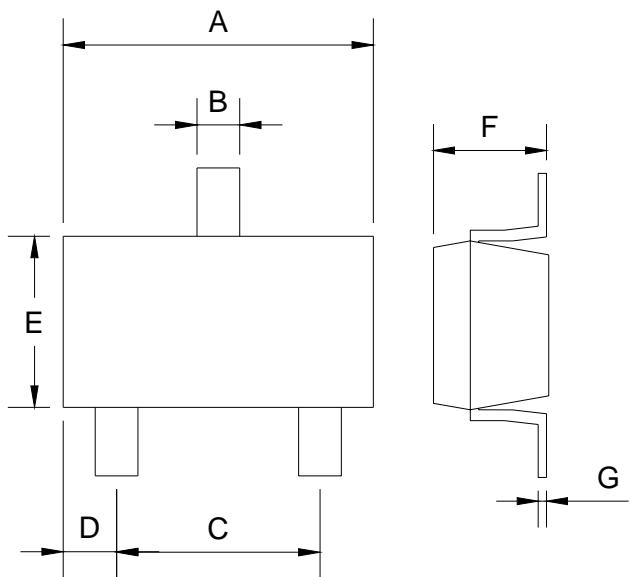

SOT-23 Mechanical Drawing

SOT-23 DIMENSION				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.80	3.04	0.110	0.120
B	0.30	0.50	0.012	0.020
C	1.70	2.30	0.067	0.091
D	0.25	0.65	0.010	0.026
E	1.2	1.60	0.047	0.063
F	0.89	1.30	0.035	0.051
G	0.08	0.17	0.003	0.006