

### Large Current Positive Voltage Regulator

The KIC3201S/T series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage. The KIC3201S/T consists of a driver transistor, a precision reference voltage and an error amplifier. Output voltage is selectable in 0.05V steps between a voltage of 1.2V and 6.0V.

#### Features


- Maximum Output Current : 400mA
- Dropout Voltage : 150mV @100mA, 300mV @200mA for  $V_{OUT}=3.0V$
- Maximum Operating Voltage : 10V
- Output Voltage Range : 1.2V ~ 6.0V (selectable in 0.05V steps)
- Highly Accurate :  $\pm 2\%$
- Low Power Consumption : Typ. 8.0uA
- Operational Temperature Range :  $-40^{\circ}C \sim 85^{\circ}C$
- Low ESR Capacitor : Ceramic compatible or Tantalum

#### Applications

- Battery Powered Equipment
- Reference Voltage Sources
- Digital Cameras, Camcoders
- Palmtop Computers
- Portable Audio Video Equipment

#### Pin Configuration


##### KIC3201S-XX





| No. | Symbol    | Description |
|-----|-----------|-------------|
| 1   | GND       | Ground      |
| 2   | $V_{IN}$  | Power input |
| 3   | $V_{OUT}$ | Output      |

• Heat Sink is common to ② ( $V_{IN}$ )

##### KIC3201T-XX



| No. | Symbol    | Description |
|-----|-----------|-------------|
| 1   | $V_{OUT}$ | Output      |
| 2   | GND       | Ground      |
| 3   | $V_{IN}$  | Power input |

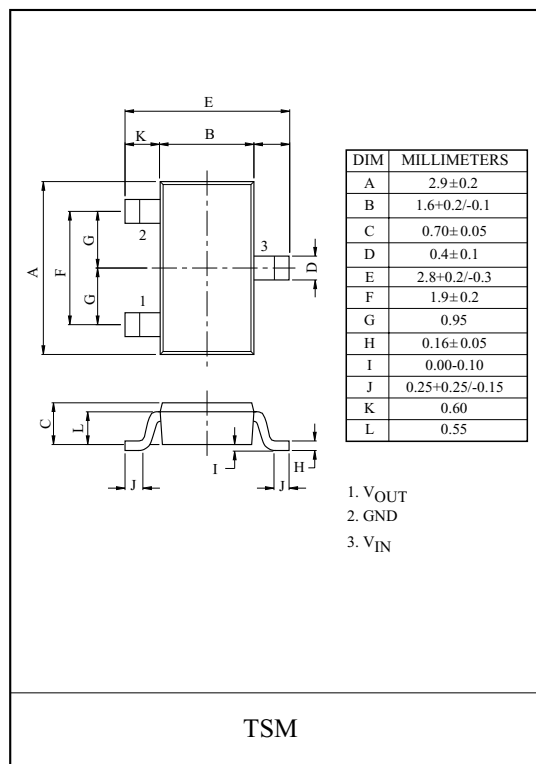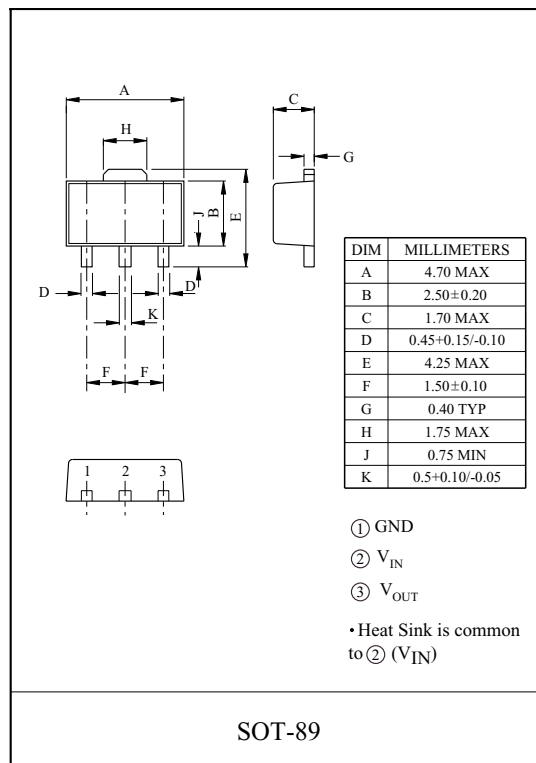

# KIC3201S/T-12 ~ KIC3201S/T-60

## Line up

| V <sub>OUT(V)</sub> | SOT-89      |         | TSM         |         |
|---------------------|-------------|---------|-------------|---------|
|                     | ITEM        | Marking | ITEM        | Marking |
| 1.2                 | KIC3201S-12 | A2      | KIC3201T-12 | B2C     |
| 1.3                 | KIC3201S-13 | A3      | KIC3201T-13 | B3C     |
| 1.4                 | KIC3201S-14 | A4      | KIC3201T-14 | B4C     |
| 1.5                 | KIC3201S-15 | A5      | KIC3201T-15 | B5C     |
| 1.6                 | KIC3201S-16 | A6      | KIC3201T-16 | B6C     |
| 1.7                 | KIC3201S-17 | A7      | KIC3201T-17 | B7C     |
| 1.8                 | KIC3201S-18 | A8      | KIC3201T-18 | B8C     |
| 1.9                 | KIC3201S-19 | A9      | KIC3201T-19 | B9C     |
| 2.0                 | KIC3201S-20 | B0      | KIC3201T-20 | C0C     |
| 2.1                 | KIC3201S-21 | B1      | KIC3201T-21 | C1C     |
| 2.2                 | KIC3201S-22 | B2      | KIC3201T-22 | C2C     |
| 2.3                 | KIC3201S-23 | B3      | KIC3201T-23 | C3C     |
| 2.4                 | KIC3201S-24 | B4      | KIC3201T-24 | C4C     |
| 2.5                 | KIC3201S-25 | B5      | KIC3201T-25 | C5C     |
| 2.6                 | KIC3201S-26 | B6      | KIC3201T-26 | C6C     |
| 2.7                 | KIC3201S-27 | B7      | KIC3201T-27 | C7C     |
| 2.8                 | KIC3201S-28 | B8      | KIC3201T-28 | C8C     |
| 2.9                 | KIC3201S-29 | B9      | KIC3201T-29 | C9C     |
| 3.0                 | KIC3201S-30 | C0      | KIC3201T-30 | D0C     |
| 3.1                 | KIC3201S-31 | C1      | KIC3201T-31 | D1C     |
| 3.2                 | KIC3201S-32 | C2      | KIC3201T-32 | D2C     |
| 3.3                 | KIC3201S-33 | C3      | KIC3201T-33 | D3C     |
| 3.4                 | KIC3201S-34 | C4      | KIC3201T-34 | D4C     |
| 3.5                 | KIC3201S-35 | C5      | KIC3201T-35 | D5C     |

\* Other Voltages available, Selectable in 0.05V steps Contact KEC for details

# KIC3201S/T-12 ~ KIC3201S/T-60

## Line up

| V <sub>OUT(V)</sub> | SOT-89      |         | TSM         |         |
|---------------------|-------------|---------|-------------|---------|
|                     | ITEM        | Marking | ITEM        | Marking |
| 3.6                 | KIC3201S-36 | C6      | KIC3201T-36 | D6C     |
| 3.7                 | KIC3201S-37 | C7      | KIC3201T-37 | D7C     |
| 3.8                 | KIC3201S-38 | C8      | KIC3201T-38 | D8C     |
| 3.9                 | KIC3201S-39 | C9      | KIC3201T-39 | D9C     |
| 4.0                 | KIC3201S-40 | D0      | KIC3201T-40 | E0C     |
| 4.1                 | KIC3201S-41 | D1      | KIC3201T-41 | E1C     |
| 4.2                 | KIC3201S-42 | D2      | KIC3201T-42 | E2C     |
| 4.3                 | KIC3201S-43 | D3      | KIC3201T-43 | E3C     |
| 4.4                 | KIC3201S-44 | D4      | KIC3201T-44 | E4C     |
| 4.5                 | KIC3201S-45 | D5      | KIC3201T-45 | E5C     |
| 4.6                 | KIC3201S-46 | D6      | KIC3201T-46 | E6C     |
| 4.7                 | KIC3201S-47 | D7      | KIC3201T-47 | E7C     |
| 4.8                 | KIC3201S-48 | D8      | KIC3201T-48 | E8C     |
| 4.9                 | KIC3201S-49 | D9      | KIC3201T-49 | E9C     |
| 5.0                 | KIC3201S-50 | E0      | KIC3201T-50 | F0C     |
| 5.1                 | KIC3201S-51 | E1      | KIC3201T-51 | F1C     |
| 5.2                 | KIC3201S-52 | E2      | KIC3201T-52 | F2C     |
| 5.3                 | KIC3201S-53 | E3      | KIC3201T-53 | F3C     |
| 5.4                 | KIC3201S-54 | E4      | KIC3201T-54 | F4C     |
| 5.5                 | KIC3201S-55 | E5      | KIC3201T-55 | F5C     |
| 5.6                 | KIC3201S-56 | E6      | KIC3201T56  | F6C     |
| 5.7                 | KIC3201S-57 | E7      | KIC3201T-57 | F7C     |
| 5.8                 | KIC3201S-58 | E8      | KIC3201T-58 | F8C     |
| 5.9                 | KIC3201S-59 | E9      | KIC3201T-59 | F9C     |
| 6.0                 | KIC3201S-60 | F0      | KIC3201T-60 | G0C     |

\* Other Voltages available, Selectable in 0.05V steps Contact KEC for details

# KIC3201S/T-12 ~ KIC3201S/T-60

## Absolute Maximum Ratings

| Characteristics                     | Symbol         | Rating                       | Units |
|-------------------------------------|----------------|------------------------------|-------|
| Input Voltage                       | $V_{IN}$       | 12                           | V     |
| Output Current                      | $I_{OUT}$      | 500                          | mA    |
| Output Voltage                      | $V_{OUT}$      | $V_{SS}-0.3 \sim V_{IN}+0.3$ | V     |
| Power Dissipation <sup>(Note)</sup> | $P_D$ (SOT-89) | 900                          | mW    |
|                                     | $P_D$ (TSM)    |                              |       |
| Operating Temperature               | $T_{OPR}$      | -40 ~ 85                     | °C    |
| Storage Temperature                 | $T_{STG}$      | -65 ~ 150                    | °C    |

Note) Package mounted on a ceramic board (600mm<sup>2</sup> × 0.8 mm)

## Electrical Characteristics

(Unless otherwise stated,  $T_a=25\text{ °C}$ ,  $V_{IN} = V_{OUT} + 1.0\text{V}$ )

| Parameter                                  | Symbol  | Conditions  | Min                   | Typ       | Max                   | Units  |
|--|---|---|-----------------------|-----------|-----------------------|--------|
| Output Voltage                             | $V_{OUT}$   | $I_{OUT}=40\text{mA}$<br>$V_{IN}=V_{OUT} + 1\text{V}$                       | $V_{OUT} \times 0.98$ | $V_{OUT}$ | $V_{OUT} \times 1.02$ | V      |
| Maximum Output Current                     | $I_{OUT(MAX)}$  | $V_{OUT}=1.2\text{V}\sim 1.5\text{V}$                                       | 400                   | -         | -                     | mA     |
|  |   | $V_{OUT}=1.6\text{V}\sim 2.4\text{V}$                                       |                       |           |                       |        |
|  |   | $V_{OUT}=2.5\text{V}\sim 2.9\text{V}$                                       |                       |           |                       |        |
|  |   | $V_{OUT}=3.0\text{V}\sim 6.0\text{V}$                                       |                       |           |                       |        |
| Load Regulation                            | Reg Load  | $1\text{mA} \leq I_{OUT} \leq 200\text{mA}$<br>$V_{IN}=V_{OUT}+1\text{V}$   | -                     | 40        | 100                   | mV     |
| Dropout Voltage                            | $V_{D1}$  | $V_{OUT}=1.8\sim 2.4\text{V}$ , $I_{OUT}=100\text{mA}$                      | -                     | 200       | 300                   | mV     |
|  |   | $V_{OUT}=2.5\sim 2.9\text{V}$ , $I_{OUT}=100\text{mA}$                      | -                     | 170       | 250                   |        |
|  |   | $V_{OUT}=3.0\sim 4.9\text{V}$ , $I_{OUT}=100\text{mA}$                      | -                     | 150       | 220                   |        |
|  |   | $V_{OUT}=5.0\sim 6.0\text{V}$ , $I_{OUT}=100\text{mA}$                      | -                     | 100       | 180                   |        |
|  | $V_{D2}$  | $V_{OUT}=1.8\sim 2.4\text{V}$ , $I_{OUT}=200\text{mA}$                      | -                     | 400       | 600                   | mV     |
|  |   | $V_{OUT}=2.5\sim 2.9\text{V}$ , $I_{OUT}=200\text{mA}$                      | -                     | 320       | 500                   |        |
|  |   | $V_{OUT}=3.0\sim 4.9\text{V}$ , $I_{OUT}=200\text{mA}$                      | -                     | 300       | 420                   |        |
|  |   | $V_{OUT}=5.0\sim 6.0\text{V}$ , $I_{OUT}=200\text{mA}$                      | -                     | 200       | 320                   |        |
| Supply Current                             | $I_{DD}$  | $V_{IN}=V_{OUT(T)}+1\text{V}$   | -                     | 8         | 16                    | μA     |
| Line Regulations                           | Reg Line  | $V_{OUT} + 1.0\text{V} \leq V_{IN} \leq 8\text{V}$<br>$I_{OUT}=40\text{mA}$ | -                     | 0.2       | 0.3                   | %/V    |
| Input Voltage                              | $V_{IN}$  |   | -                     | -         | 10                    | V      |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{\Delta T_{OPR}} \cdot V_{OUT}$ | $I_{OUT}=40\text{mA}$<br>$-40\text{ °C} \leq T_{OPR} \leq 85\text{ °C}$     | -                     | 100       | -                     | ppm/°C |
| Short Circuit Current                      | $I_{SC}$  | $V_{IN}=V_{OUT}+1\text{V}$ ,<br>$V_{OUT}=0\text{V}$                         | -                     | 50        | -                     | mA     |

# KIC3201S/T-12 ~ KIC3201S/T-60

●KIC3201S/T-18

Fig. 1  $I_{OUT} - V_{OUT}$

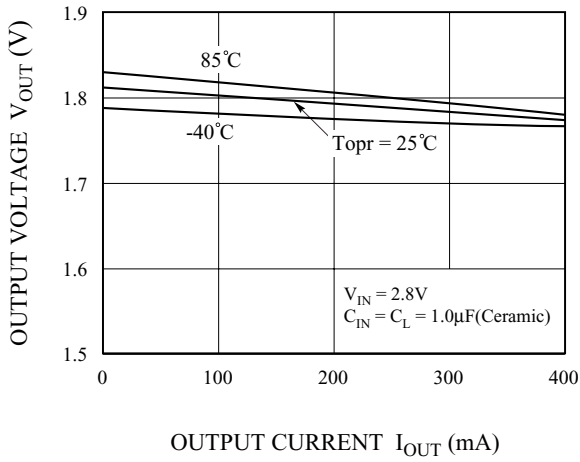


Fig. 2  $V_{IN} - V_{OUT}$

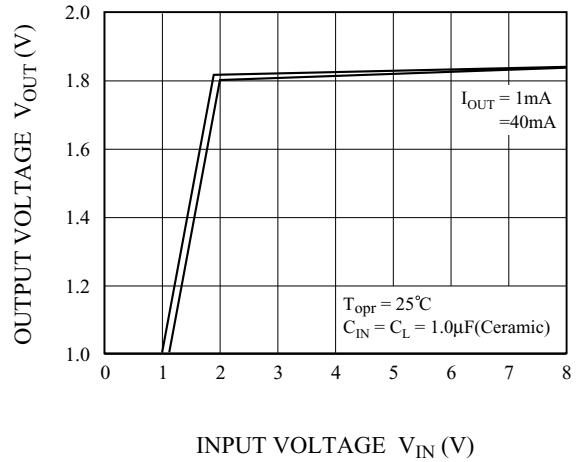


Fig. 3  $V_{IN} - I_{SS}$

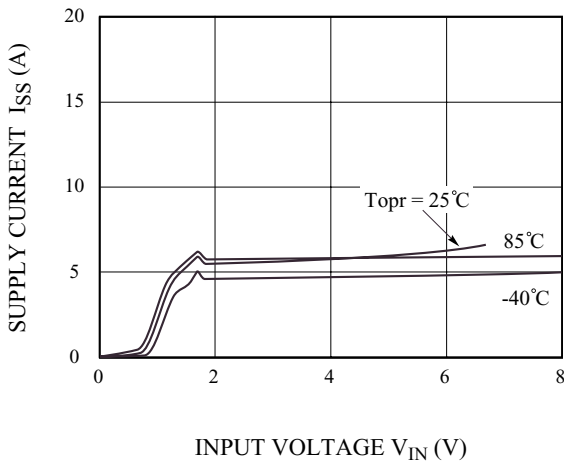


Fig. 4  $T_a - V_{OUT}$

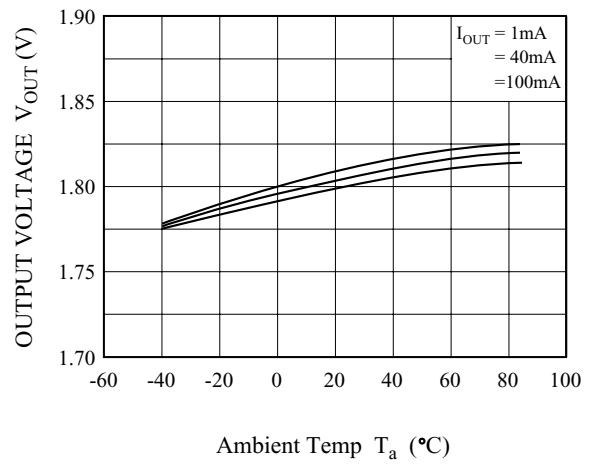


Fig. 5 Input Transient Response


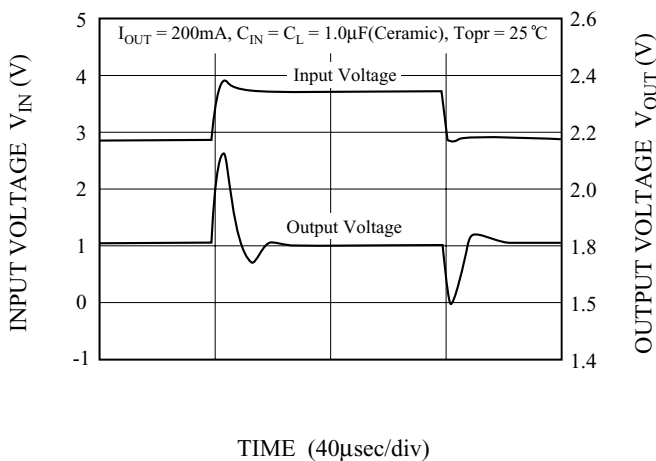


Fig. 6 Load Transient Response ( $I_{OUT} = 40mA$ )

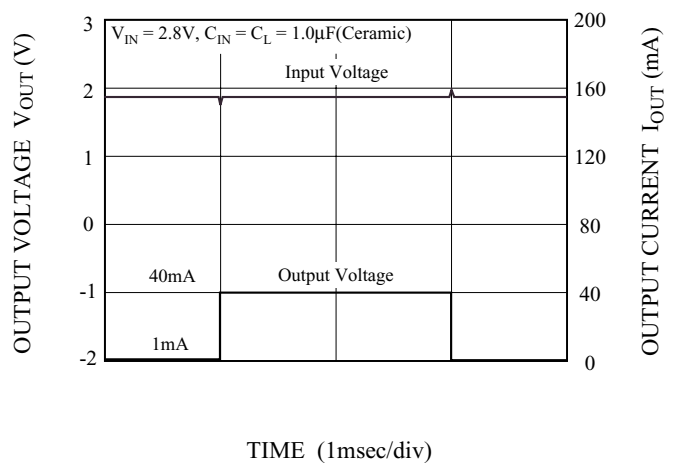

# KIC3201S/T-12 ~ KIC3201S/T-60

Fig. 7 Load Transient Response  
( $I_{OUT} = 200\text{mA}$ )

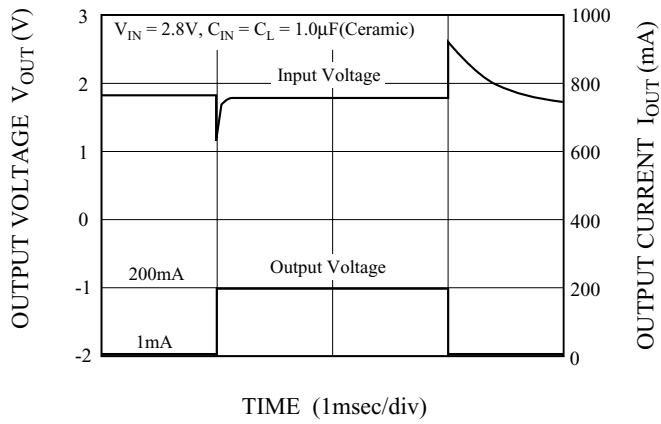


Fig. 8 PSRR

