


## Precision Rotative Transducers, Conductive Plastic, Servo Mounting



A complete range of servo mounting rotational transducers for applications requiring long life accuracy and speed.

### FEATURES

- Size 08 to 30
- Linearity  $\pm 1\%$  down to  $\pm 0.015\%$
- Excellent repeatability
- Long life
- Essentially infinite resolution
- Up to 6 electrical functions with the same shaft
- On request custom design to meet your specifications
- Following MIL-R-39023 and NFC 93-255 requirements




SIZE	08	09	11	13	15	18	20	30
MODEL	34 SF	78 SF	116 SF	156 SF	176 SF	134 SF	200 SF	300 SF

ELECTRICAL SPECIFICATIONS								
Functions	Linear, on request specific law							
Theoretical Electrical Angle (TEA)	TEA = actual electrical angle (AEA) - 2°							
Independent Linearity (over TEA) On Request Best Linearity Available	A $\leq \pm 1\%$ or B $\leq \pm 0.5\%$ or C $\leq \pm 0.25\%$ or D $\leq \pm 0.1\%$ D $\leq \pm 0.1\%$ Down to E $\leq \pm 0.05\%$ Down to F $\leq \pm 0.025\%$ Down to $\leq \pm 0.015\%$							
Actual Electrical Angle (AEA)	340° $\pm 3^\circ$				350° $\pm 2^\circ$			
Ohmic Values (R <sub>T</sub> )	1 k $\Omega$ - 2 k $\Omega$ - 5 k $\Omega$ - 10 k $\Omega$ - on request other values							
Ohmic Value Tolerances at 20 °C	$\pm 10\%$ ; on request $\pm 5\%$							
Output Smoothness	$\leq 0.025\%$						On request $\leq 0.01\%$	
Maximum Power Rating at 70 °C	0.25 W	0.3 W	0.4 W	0.5 W	0.75 W	1.0 W	1.2 W	1.5 W
Wiper Current/Load Resistance	Recommended: a few $\mu\text{A}$ - 1 mA max. continuous/minimum $10^3 \times R_T$							
Tap (Current or Voltage) On Request with Angular Position to be Specified	U = Current		{ Position: $\pm 2^\circ$ { Width: $\leq 4^\circ$		/ T = Voltage		Position: $\pm 2^\circ$	
Repeatability	$\leq 0.01\%$							
End Voltage	$\leq 0.4\%$ for $470 \Omega \leq R_T \leq 1000 \Omega$ / $\leq 0.2\%$ for $1000 \Omega \leq R_T \leq 2200 \Omega$ / $\leq 0.1\%$ $R_T > 2200 \Omega$							
Insulation Resistance	$\geq 1000 \text{ M}\Omega$ , 500 V <sub>DC</sub>							
Dielectric Strength	$\geq 750 \text{ V}_{\text{RMS}}$ , 50 Hz				$\geq 1000 \text{ V}_{\text{RMS}}$ , 50 Hz			

MECHANICAL SPECIFICATIONS									
Mechanical Rotation	360° continuous; stops on request								
Mounting/Shaft Guiding	Servo/ball bearings								
Housing	Diallylphthalate; on request anodized aluminum								
Termination	Turrets; on request flexible leads, cables...								
Wiper	Precious metal multi-finger contact								
Starting Torque (N.cm)	1 cup	0.2				0.25			
	each additional cup	0.15							
Moment of Inertia (g. cm <sup>2</sup> )		0.3	0.4	0.6	0.8	2.2	2.8	3.5	10
Weight (g)	1 cup	11 $\pm 2$	16 $\pm 2$	20 $\pm 2$	29 $\pm 2$	49 $\pm 2$	67 $\pm 3$	79 $\pm 3$	120 $\pm 10$
	each additional cup	5 $\pm 2$	6 $\pm 2$	7 $\pm 2$	10 $\pm 2$	16 $\pm 2$	18 $\pm 3$	21 $\pm 3$	62 $\pm 10$

PERFORMANCE	
Life (Million of Cycles)	$\geq 50$
Temperature Range	- 55 °C to + 125 °C
Climatic Category	55/125/04
Maximum Rotation Speed (RPM)	600
Sine Vibration on 3 Axes	1.5 mm or 20 g from 10 Hz to 2000 Hz
Mechanical Shocks on 3 Axes	50 g - 11 ms - half sine

#### DIMENSIONS in millimeters, general tolerance $\pm 0.5$ mm

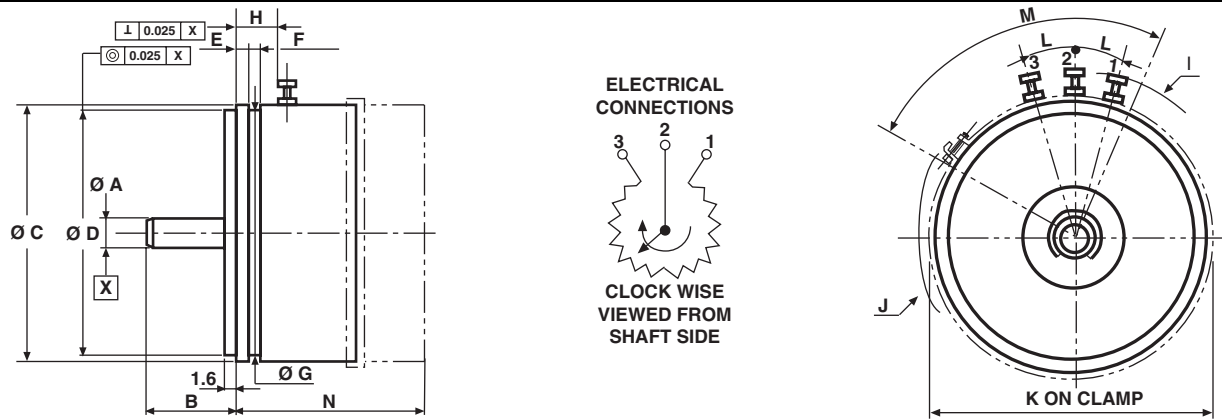

DIMENSIONS	DESIGNATION	SIZE	POTENTIOMETER REFERENCE							
			08	09	11	13	15	18	20	30
		MODEL	34 SF	78 SF	116 SF	156 SF	176 SF	134 SF	200 SF	300 SF
A - 0 - 0.013	$\varnothing$ shaft stainless steel		3.175	3.175	3.175	3.175	6.345	6.345	6.345	6.345
B max.	Shaft length		13	16.6	16.6	16.6	16.6	16.6	16.6	16.6
C max.	$\varnothing$ body plastic molded		19.18	22.3	27.07	33.35	36.6	44.5	50.9	76.3
D	$\varnothing$ flange		15.875	19.05	24.608	30.16	33.337	39.674	47.625	73.025
	Tolerance on flange		+ 0 - 13 $\mu$ m						+ 0 - 25 $\mu$ m	
E	Shoulder		1.6	1.6	1.6	1.6	1.6	1.6	2.4	2.4
F min.	Width of groove		1.5	1.5	1.5	1.5	2.2	1.8	2.2	1.75
$\varnothing$ G max.	Diameter of groove		17.57	19.8	24.8	30.9	33.3	41.4	47.6	73.1
H min.	Turret location		5.8	5.95	6.3	6.3	7	10.15	10.2	10.2
I max.	Radius on turrets		14	15.4	17.3	20.5	23.1	26.5	29.7	43.7
J max.	Radius on screw clamp		13.5	15.4	17.3	18.9	23.1	26.5	29.7	42.6
K max.	$\varnothing$ on clamp		19.6	23.8	27.7	33.6	37.4	44.5	50.8	77.5
L $\pm 2^\circ$	Angle between turrets		30°	30°	25°	20°	20°	25°	15°	15°
M max.	Total angle		100°	100°	100°	100°	80°	80°	80°	80°
N max.	1 cup		16	20.5	20.5	20.5	23.5	23.5	23.5	23
	2 cups		23	27	23	25.5	26.13	26	28.5	34.5
	3 cups		36	40	36	39.5	39.5	39.5	40.97	-
	4 cups		42	50	42	47	49.5	49.5	50.72	-
	5 cups		54.5	63	54	60.5	62.5	62.5	64.5	-
	6 cups		60.5	74	60.5	68.5	73.5	73.5	74.5	-

#### ORDERING INFORMATION/DESCRIPTION

ROT	156	S	F	1	C	T	502	e1
SERIES	MODEL	MOUNTING TYPE	CONDUCTOR	NUMBER OF CUPS	LINEARITY	TAP	OHMIC VALUE	LEAD FINISH
		S: Servo	F: Plastic Film	From 1 up to 6	Code A: $\pm 1\%$ B: $\pm 0.5\%$ C: $\pm 0.25\%$ D: $\pm 0.1\%$ E: $\pm 0.05\%$ F: $\pm 0.025\%$	On request T: Voltage U: Current position to be specified	First 2 digits are significant numbers 3rd digit indicates number of zeros	

Special characteristics designs on request

#### SAP PART NUMBERING GUIDELINES

RO 116SF	1	D	502
MODEL	GANG NUMBER	LINEARITY	OHMIC VALUE
	From 1 up to 6		5 k $\Omega$



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.