



DISH AVALANCHE AUTOMOTIVE RECTIFIER

ADRS30M	AVALANCHE VOLTAGE	37 to 41 Volts
ADR30M	CURRENT	30 Amperes


Technical Specifecation:

Features:

- High power capability
- Economical
- Avalanche Voltage: 37V to 41V
- Glass passivated chip

MECHANICAL DATA

- Case: Copper case
- Epoxy: UL94-0 rate flame ratardant
- Polarity: As marked of case bottom
- Technology cell vacuum soldered
- Lead: Plated slug, solderable per MIL-STD-202E Method 208C
- Weight: 0.032 ounce 0.9 Grams (ADRS)
0.035 ounce 1.0 Grams (ADR)

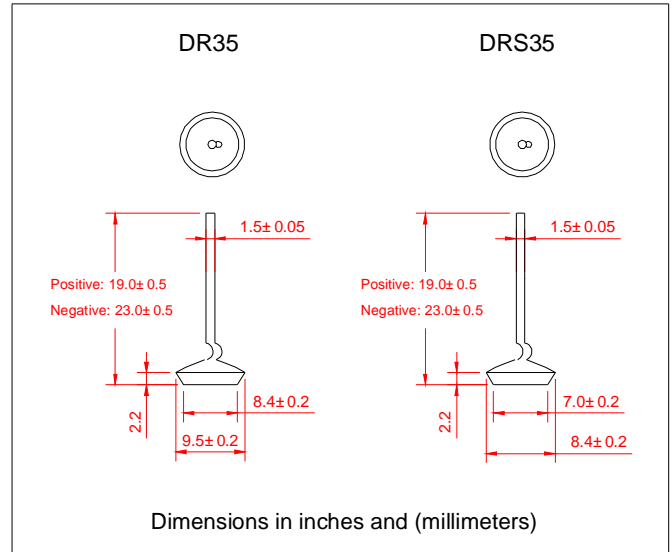

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		ADRS30L/ADR30L			
Electrical Characteristics @ 25°C	SYMBOLS	MIN	NOMINAL	MAX	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}		28		Volts
Working Peak Reverse Voltage	V_{RRM}		28		
DC Blocking Voltage	V_{DC}		28		
Average Rectified Forward Current ($T_c=125^\circ C$)	I_o		30		Amps
Repetitive Peak Reverse Surge Current $T_c=10msec$ Dury Cycle < 1%	I_{RSM}		30		Amps
Breakdown Voltage ($V_{br@ir=100mA}$, $T_c=25^\circ C$)	V_{br1}	24	25-27	32	Volts
$I_r=90Amps$, $T_c=150^\circ C$, $PW=80\mu sec$	V_{br2}			40	Volts
Forward Voltage Drop @ $I_f=100Amps < 300\mu sec$	V_F		1.05	1.10	Volts
Peak Forward Surge Current	I_{FSM}		400		Amps
Reverse Leakage ($V_R=17Vdc$) $T_A=25^\circ C$	I_R		1.0	2.0	$\mu Amps$
Operating and Storage Junction Temperature Range	T_J, T_{STG}		-65 to +175		$^\circ C$

Notes: 1. Enough heatsink must be considered in application.

