
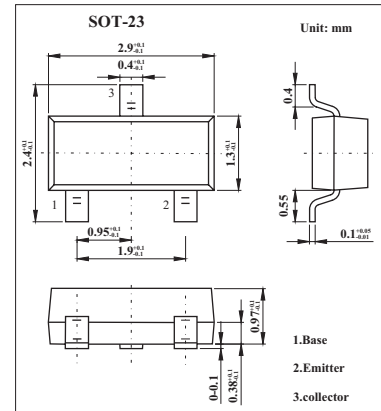


## Driver Transistors

### MMBTA55,MMBTA56

#### ■ Features

- SOT-23 package



#### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	MMBTA55	MMBTA56	Unit
Collector-emitter voltage	$V_{CE0}$	-60	-80	V
Collector-base voltage	$V_{CB0}$	-60	-80	V
Emitter-base voltage	$V_{EB0}$	-4.0		V
Collector current	$I_C$	-500		mA
Total Device Dissipation FR-5 Board(* 1) Derate above $25^\circ\text{C}$	$P_D$	225	1.8	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	556		$^\circ\text{C}/\text{W}$
Total Device Dissipation Alumina Substrate, (* 2) Derate above $25^\circ\text{C}$	$P_D$	300	2.4	mW mW/ $^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	417		$^\circ\text{C}/\text{W}$
Junction temperature	$T_j$	150		$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150		$^\circ\text{C}$

\* 1. FR-5 = 1.0 X 0.75 X 0.062 in.

\* 2. Alumina = 0.4 X 0.3 X 0.024 in. 99.5% alumina.

## MMBTA55,MMBTA56

■ Electrical Characteristics  $T_a = 25^\circ\text{C}$ 

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-emitter breakdown voltage* MMBTA55 MMBTA56	$V_{(BR)CEO}$	$I_C = -1.0\text{ mA}, I_B = 0$	-60			V
			-80			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100\ \mu\text{A}, I_C = 0$	-4.0			V
Base cutoff current	$I_{CES}$	$V_{CE} = -60\text{ V}, I_B = 0$			-0.1	$\mu\text{A}$
Collector cutoff current MMBTA55 MMBTA56	$I_{CBO}$	$V_{CB} = -60\text{ V}, I_E = 0$			-0.1	$\mu\text{A}$
		$V_{CB} = -80\text{ V}, I_E = 0$			-0.1	$\mu\text{A}$
DC current gain	HFE	$I_C = -10\text{ mA}, V_{CE} = -1.0\text{ V}$	100			
		$I_C = -100\text{ mA}, V_{CE} = -1.0\text{ V}$	100			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -100\text{ mA}, I_B = -10\text{ mA}$			-0.25	V
Base-emitter saturation voltage	$V_{BE(on)}$	$I_C = -100\text{ mA}, V_{CE} = -1.0\text{ V}$			-1.2	V
Current-gain-bandwidth product	$f_T$	$I_C = -100\text{ mA}, V_{CE} = -1.0\text{ V}, f = 100\text{ MHz}$	50			MHz

\* Pulse test: pulse width  $\leq 300\ \mu\text{s}$ , duty cycle  $\leq 2.0\%$ .

## ■ hFE Classification

TYPE	MMBTA55	MMBTA56
Marking	2H	2G