


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	89.9	90	90.1
Insertion Loss	dB	-	26.3	27
1 dB Bandwidth	MHz	-	19.2	-
3 dB Bandwidth	MHz	19.35	19.4	19.45
35 dB Bandwidth	MHz	-	20.12	20.2
40 dB Bandwidth	MHz	-	20.18	-
45 dB Bandwidth	MHz	-	20.23	20.6
50 dB Bandwidth	MHz	-	20.28	21.4
55 dB Bandwidth	MHz	-	20.33	29.4
Passband Variation	dB	-	0.9	1
Absolute Delay	usec	-	3.5	4
Ultimate Rejection	dB	48	50	-
Material Temperature coefficient	KHz/°C	-7.38		
Ambient Temperature	°C	25		
Package Size	DIP3512 (35.0x12.8x4.7mm3)			

Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

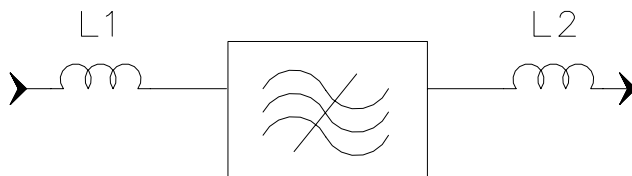

$$L1=L2=22nH$$

Source/Load Impedance=50 ohm


Notes - Component values may change depending on board layout.



SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBN09014		
Rev. Date	2006-3-20		
Rev.	1.0	Page 1/3	

Package Dimension

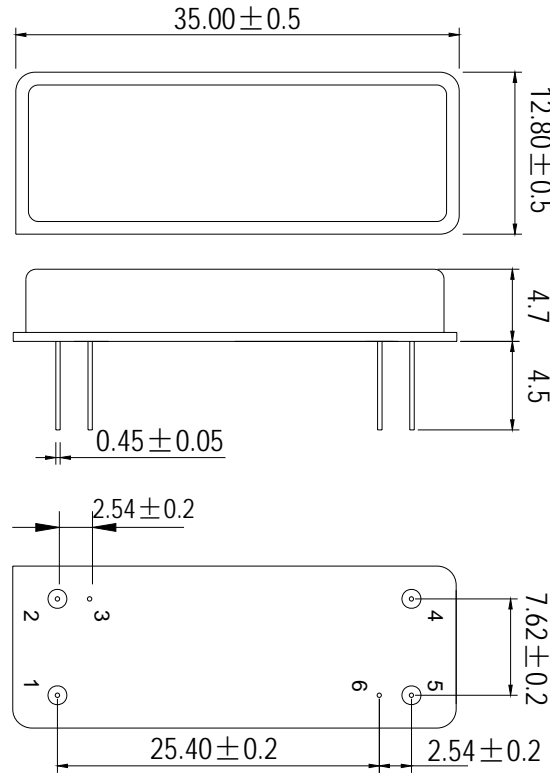


Input:1
Output:5



SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBN09014	
Rev. Date	2006-3-20	
Rev.	1.0	Page 2/3

Typical Performance

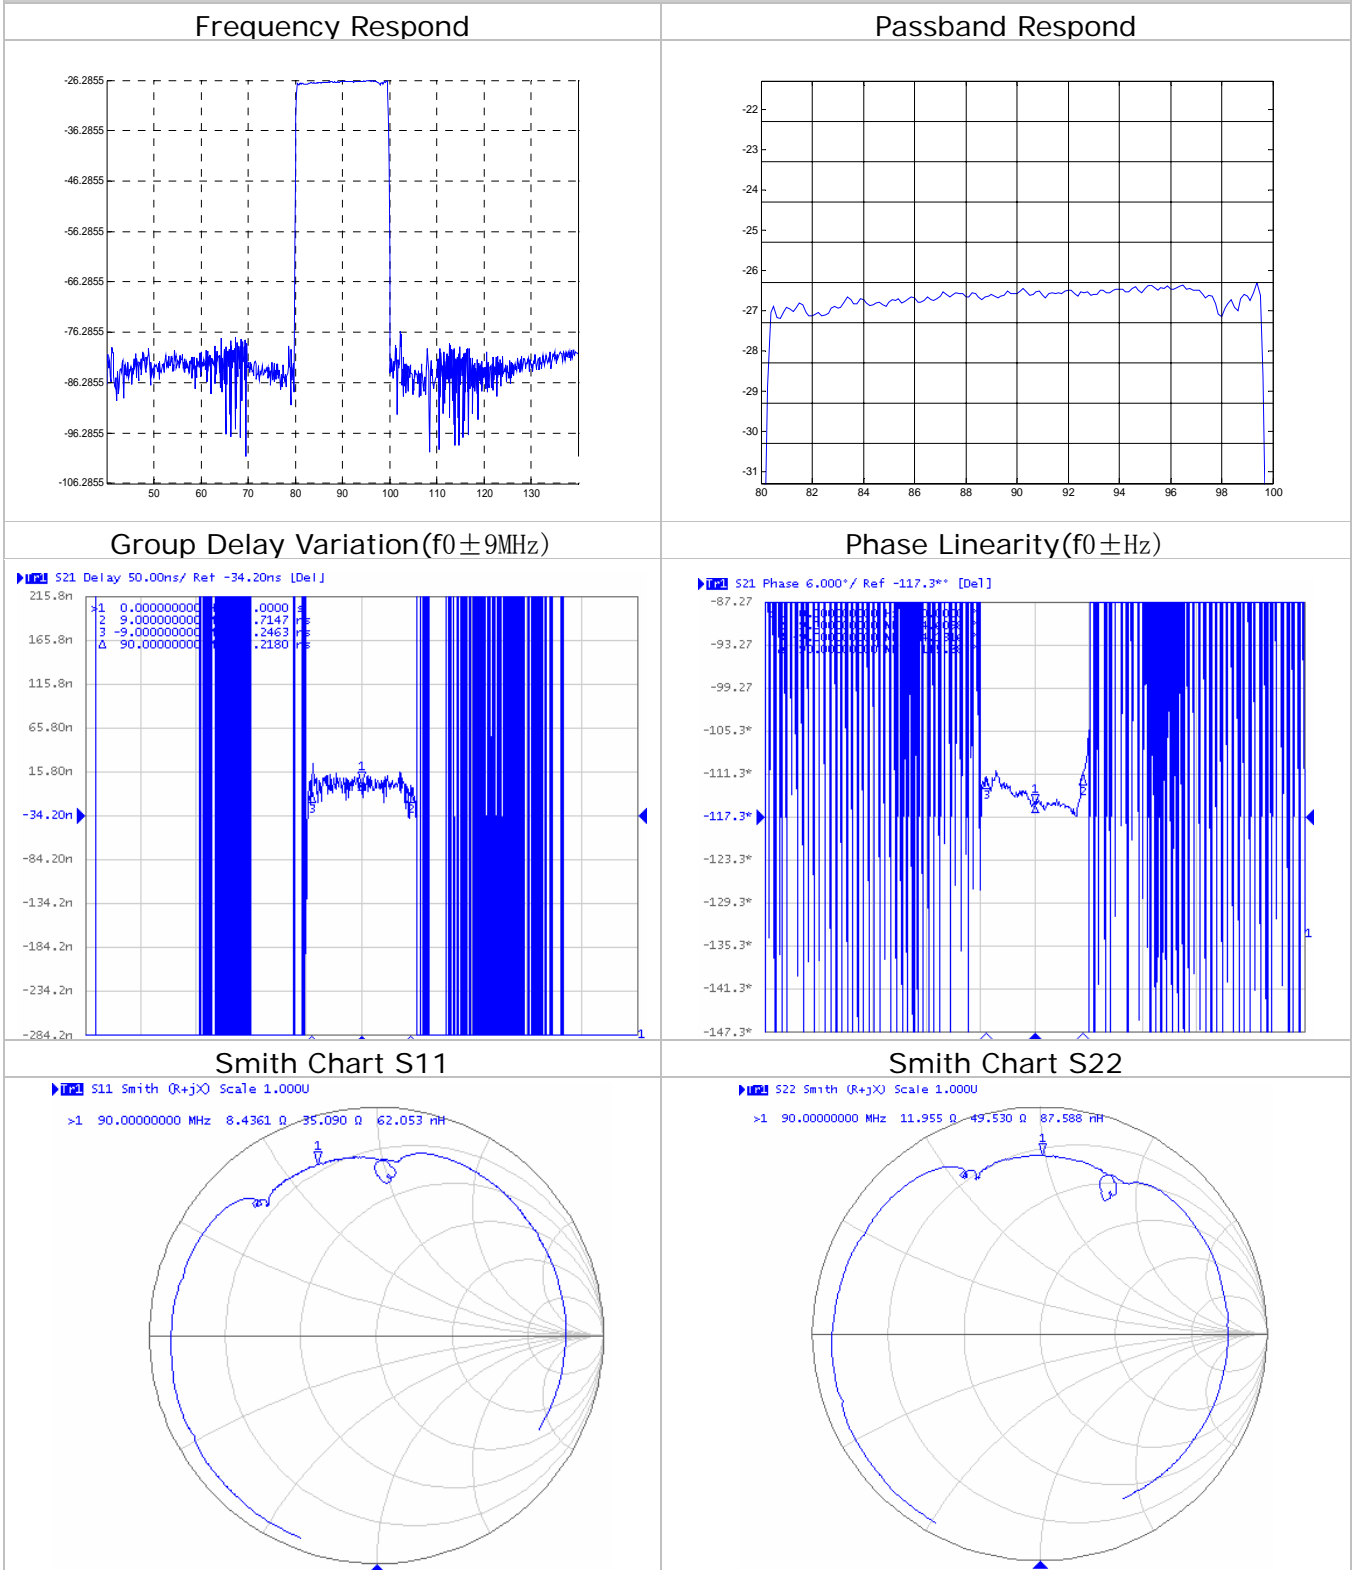

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBN09014	
Rev. Date	2006-3-20	
Rev.	1.0	Page 3/3