

# Distinctive Characteristics

International certifications from UL, CSA, VDE, SEMKO, and SEV.

High torque bushing construction prevents rotation or separation from frame during installation.

Stainless steel frame resists corrosion and increases environmental safety.

Case/base of heat resistant resin meets UL94V-0 flammability standard.


Contacts of special silver alloy resist arcing and guarantee stable electrical contact and long life.

High insulating barriers increase isolation of circuits in double pole devices and provide added protection to contact points.


Prominent external insulating barriers increase insulation resistance and dielectric strength.

Epoxy sealed terminals prevent entry of flux, solvents, and other contaminants.

Clinching of the frame to the case well above the base and terminals provides 4,000V dielectric strength.

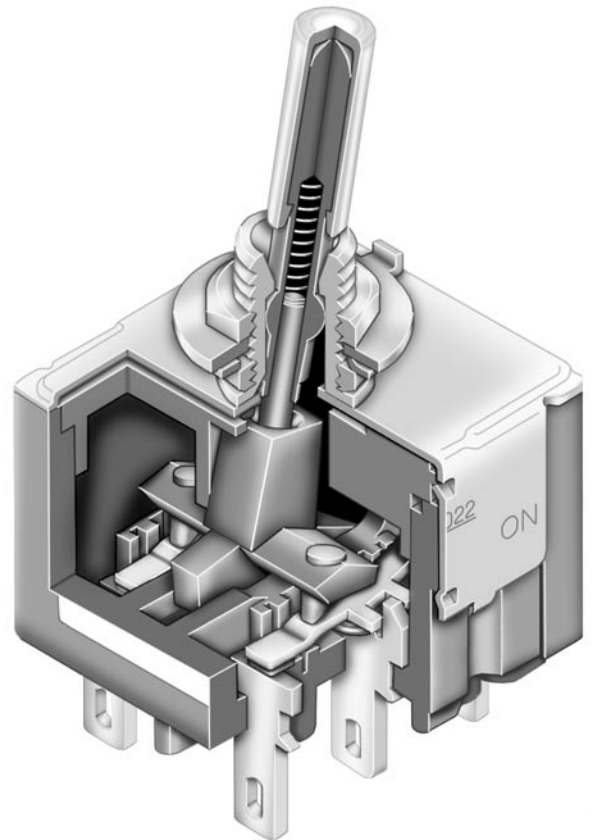

Actual Size

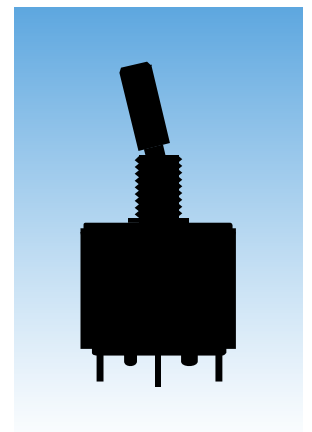

# General Specifications

### Electrical Capacity

<b>Resistive Load:</b>	10A @ 125V AC or 6A @ 250V AC
<b>Motor Load:</b>	400W @ 125V AC
<b>Lamp Load:</b>	2A @ 125V AC for On-Off-On circuit & 3A @ 125V AC for other circuits

### Other Ratings

<b>Contact Resistance:</b>	10 milliohms maximum
<b>Insulation Resistance:</b>	1,000 megohms minimum @ 500V DC
<b>Dielectric Strength:</b>	2,000V AC minimum between contacts for 1 minute minimum; 4,000V AC minimum between contacts & case for 1 minute minimum
<b>Mechanical Life:</b>	100,000 operations minimum
<b>Electrical Life:</b>	25,000 operations minimum
<b>Angle of Throw:</b>	25°

### Materials & Finishes

<b>Toggle Cap:</b>	Brass with nickel plating
<b>Lever:</b>	Brass with chrome plating
<b>Bushing:</b>	Brass with nickel plating
<b>Frame:</b>	Stainless steel
<b>Case/Base:</b>	Diallyl phthalate resin (UL94V-0)
<b>Movable Contacts:</b>	Silver alloy with silver plating
<b>Stationary Contacts:</b>	Pure silver with silver plating
<b>Terminals:</b>	Copper with silver plating







### Environmental Data

<b>Operating Temp Range:</b>	-10°C through +85°C (+14°F through +185°F)
<b>Humidity:</b>	90 ~ 95% humidity for 96 hours @ 40°C (104°F)
<b>Vibration:</b>	10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
<b>Shock:</b>	50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

### Installation

<b>Soldering Time &amp; Temp:</b>	Wave Soldering Recommended (Straight PC): See Profile A in Supplement section. Manual Soldering: See Profile A in Supplement section.
-----------------------------------	--

### Standards & Certifications

<b>Flammability Standards:</b>	UL94V-0 rated case/base
 <b>UL Recognized:</b>	All models recognized at 10A @ 125V AC & 6A @ 250V AC; UL File No. WOYR2.E44145. Add "/U" to end of part number to order UL mark on switch.
 <b>C-UL Recognized:</b>	All models recognized at 10A @ 125V AC & 6A @ 250V AC; C-UL File No. WOYR8.E44145. Add "/C-UL" to end of part number to order C-UL mark on switch.
 <b>CSA Certified:</b>	All models certified at 10A @ 125V AC & 6A @ 250V AC; CSA File No. 023535-0-000. Add "/C" to end of part number to order CSA mark on switch.
 <b>VDE Approved:</b>	All models approved at 10A @ 125V AC & 6A @ 250V AC; License No. 119174. Marking on switch is standard.
 <b>SEMKO Approved:</b>	P2011, P2012, P2013, P2021, P2022 models approved at 10A @ 125V AC & 6A @ 125/250V AC; Reference No. 9915205/01-02. Marking on switch is standard.
 <b>SEV Approved:</b>	All models with Quick Connect Terminals approved at 10A @ 125V AC & 6A @ 125/250V AC; (P2013 for micro-switch only); Authorization No. 02.0466. Marking on switch is standard.

### TYPICAL SWITCH ORDERING EXAMPLE

P20

POLES & CIRCUITS				
11	SPST	ON	NONE	OFF
12	SPDT	ON	NONE	ON
13	SPDT	ON	OFF	ON
21	DPST	ON	NONE	OFF
22	DPDT	ON	NONE	ON
23	DPDT	ON	OFF	ON

22


TOGGLES & BUSHINGS	
No Code	.512" (13.0mm) White Cap with 6mm Bushing
E	.450" (11.4mm) Flatted with 6mm Bushing
B	.689" (17.5mm) Large Bat with 12mm Bushing
D	.748" (19.0mm) White Capped Column with 12mm Bushing

B

TERMINALS	
No Code	Solder Lug
P	Straight PC
Z	.187" (4.75mm) Quick Connect

### DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

#### P2022B

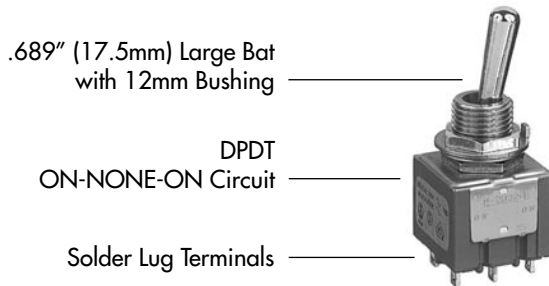

#### IMPORTANT:



VDE, SEMKO & SEV are marked on approved models. Switches are supplied without UL, C-UL & CSA marking unless specified. Specific models & ratings noted on General Specifications page.


### POLES & CIRCUITS

		Toggle Position			Connected Terminals			Throw & Schematics
Pole	Model	Down	Center	Up	Down	Center	Up	Note: Terminal numbers are on the switch.
		Keyway	Keyway	Keyway	Keyway	Keyway	Keyway	
SP	P2011	ON	NONE	OFF	1-1b	OPEN	OPEN	SPST
SP	P2012 P2013	ON ON	NONE OFF	ON ON	1-1b	OPEN	1-1a	SPDT
DP	P2021	ON	NONE	OFF	1-1b 2-2b	OPEN	OPEN	DPST
DP	P2022 P2023	ON ON	NONE OFF	ON ON	1-1b 2-2b	OPEN	1-1a 2-2a	DPDT

### TOGGLES & BUSHINGS


**No Code**

**.512" (13.0mm)**  
White Cap with  
6mm Bushing




**E**

**.450" (11.4mm)**  
Flatted with  
6mm Bushing




**B**

**.689" (17.5mm)**  
Large Bat with  
12mm Bushing




**D**

**.748" (19.0mm)**  
White Capped Column  
with 12mm Bushing




#### Panel Cutouts


Panel Thickness  
with Keyway  
.134" (3.4mm)  
maximum




Panel Thickness  
with Locking Ring  
.102" (2.6mm)  
maximum



Panel Thickness  
with Keyway  
.256" (6.5mm)  
maximum



Panel Thickness  
with Locking Ring  
.217" (5.5mm)  
maximum



#### Standard Hardware


**For 6mm Bushing:** 1 Locking Ring AT507M, 1 Internal Tooth Lockwasher AT509, 2 Hex Nuts AT513M

**For 12mm Bushing:** 1 Hex Face Nut AT503M, 1 Locking Ring AT506M, 1 Internal Tooth Lockwasher AT508, 1 Hex Mounting Nut AT527M

### TERMINALS


**No Code**

**Solder Lug**




**Z**

**.187" (4.75mm)**  
Quick Connect




**P**


**Straight PC**




**SPST**




**SPDT**



**DPST**



**DPDT**






### TYPICAL SWITCH DIMENSIONS

**6mm Bushing**

**P2011, P2012, P2013**



**P2012**

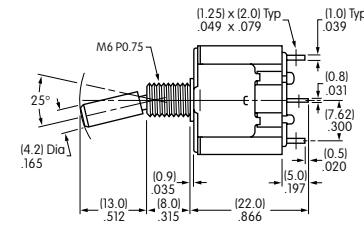




P2011 models do not have terminal 1a.

**12mm Bushing**

**P2021B, P2022B, P2023B**



**P2022B**

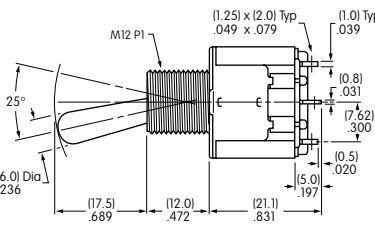

P2021 models do not have terminals 1a & 2a.