


## ● Features:

1. Chip material: GaAsP/GaP
2. Emitted color : Yellow
3. Lens Appearance : Yellow Diffused
4. Low power consumption.
5. High efficiency.
6. Versatile mounting on P.C. Board or panel.
7. Low current requirement.
8. 3mm diameter package

## ● Applications:

1. TV set
2. Monitor
3. Telephone
4. Computer
5. Circuit board

## ● Package dimensions:

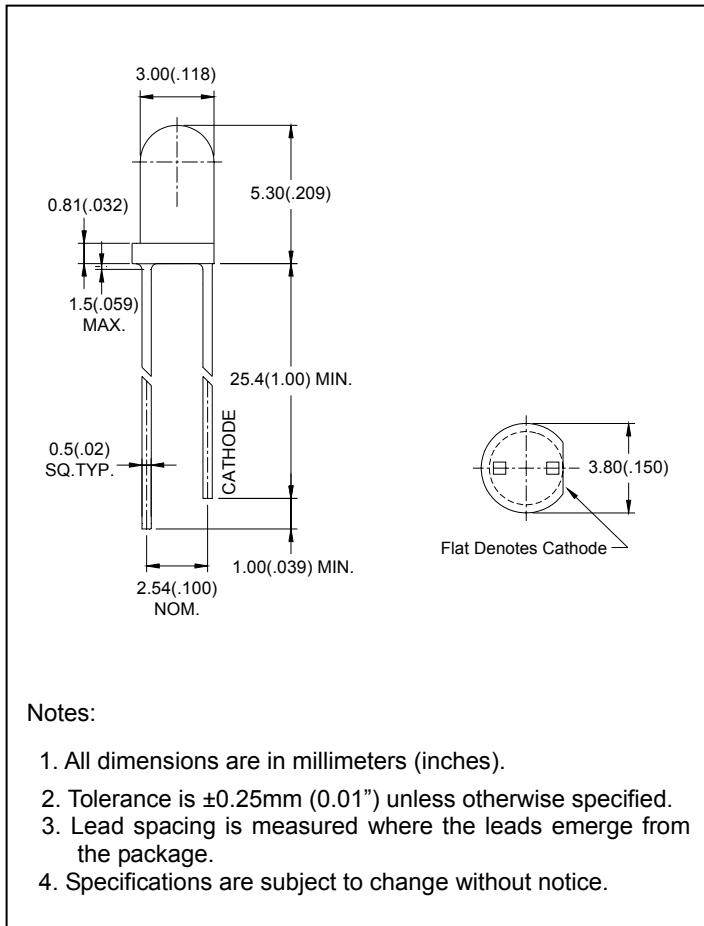

## ● Absolute Maximum Ratings( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Rating	Unit
Power Dissipation	P <sub>d</sub>	80	mW
Forward Current	I <sub>F</sub>	30	mA
Peak Forward Current <sup>*1</sup>	I <sub>FP</sub>	150	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	T <sub>opr</sub>	-40°C~80°C	
Storage Temperature	T <sub>stg</sub>	-40°C~85°C	
Soldering Temperature	T <sub>sol</sub>	260°C (for 5 seconds)	

<sup>\*1</sup>Condition for I<sub>FP</sub> is pulse of 1/10 duty and 0.1msec width.

## ● Electrical and optical characteristics(Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF=20mA	-	2.1	2.6	V
Luminous Intensity	IV	IF=20mA	-	30	-	mcd
Reverse Current	IR	VR=5V	-	-	100	µA
Peak Wave Length	$\lambda_p$	IF=20mA	-	585	-	nm
Dominant Wave Length	$\lambda_d$	IF=20mA	582	-	595	nm
Spectral Line Half-width	$\Delta\lambda$	IF=20mA	-	35	-	nm
Viewing Angle	$2\theta_{1/2}$	IF=20mA	-	35	-	deg

## ● Typical Electro-Optical Characteristics Curves

Fig.1 Relative intensity vs. Wavelength

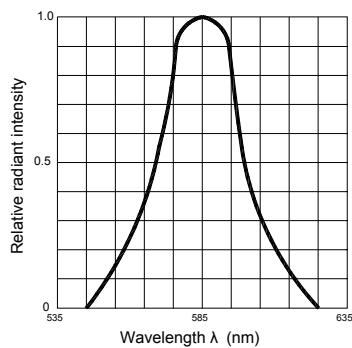


Fig.2 Forward current derating curve vs. Ambient temperature

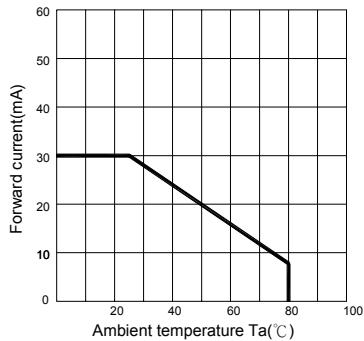


Fig.3 Forward current vs. Forward voltage

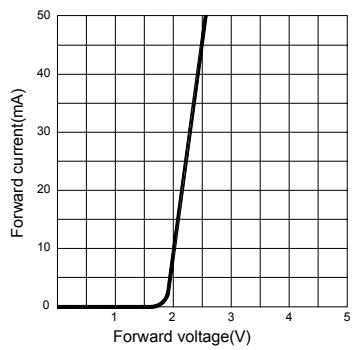


Fig.4 Relative luminous intensity vs. Ambient temperature

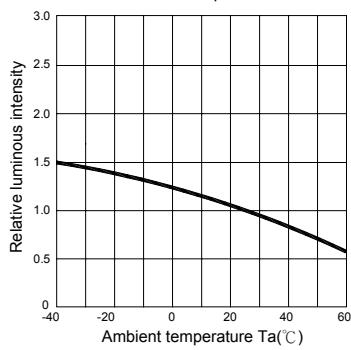


Fig.5 Relative luminous intensity vs. Forward current



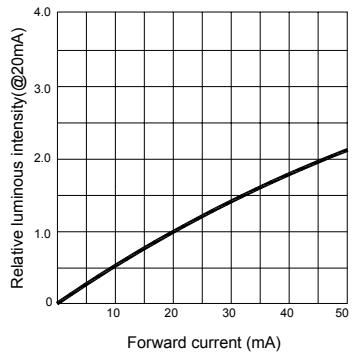


Fig.6 Radiation diagram

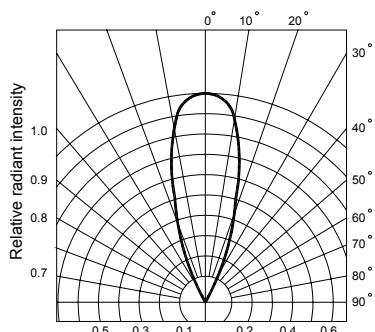

## ● Tapping and packaging specifications(Units: mm)

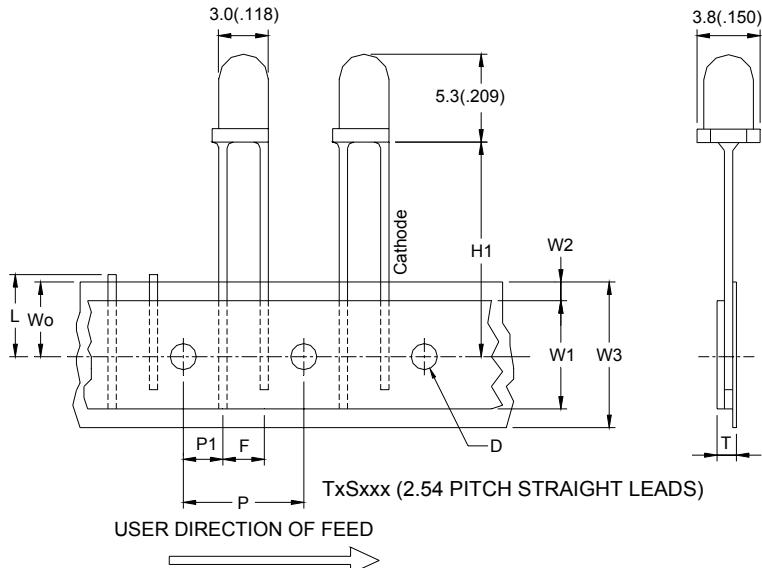

H1	18.0 (.709) $\pm$ 0.5
L	11.0 (.433) Max.
Wo	9.0 (.35)
P1	5.0 (.196)
F	2.54 (0.1)
P	12.5 (.49)
D	$\phi$ 4.0 (.157)
W1	10.0 (.394)
W2	4.0 (.157) Max.
W3	18.0 (.708)
T	1.42 (.055) Max.

Notes: 1. All dimensions are in millimeter (inch).

2. Tolerance is  $\pm 0.25$ mm (0.01") unless otherwise specified.

3. Lead spacing is measured where the leads emerge from the package.

4. The stopper is used as the tie bar.

## ● Bin Limits

### 1. Intensity Bin Limits (At $I_F = 20$ mA)

Bin Code	Min. (mcd)	Max. (mcd)
:	:	:
K	11.0	21.0
L	16.0	32.0
M	24.0	48.0
N	37.0	72.0
P	55.0	110.0
:	:	:

## ● Bin : x

↑  
Intensity bin code