



1. Mechanical Dimensions:

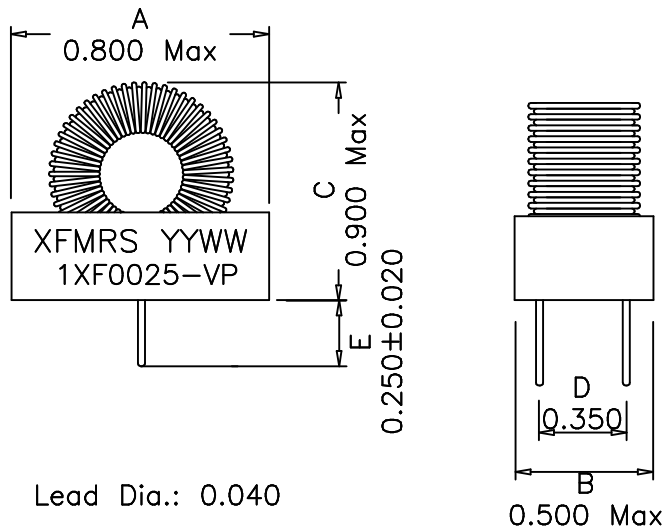

Lead Dia.: 0.040

2. Schematic:



3. Electrical Specifications:

Inductance: 25uH ±10% @10KHz, 100mV
 OCL: 21.25uH Typ @10KHz, 100mV 4Adc
 DC Res.: 0.025 Ohms Maximum

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: -40°C to +85°C

DOC. REV. A/3

XFMRs Inc.	Title: VERTICAL INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	P/N: 1XF0025-VP	REV. A
	DWN.	廖玉坤	Dec-26-01
	CHK.	李清儿	Dec-26-01
	APP.	Isaiah M	Dec-26-01