



1. CONFIGURATION & DIMENSIONS :

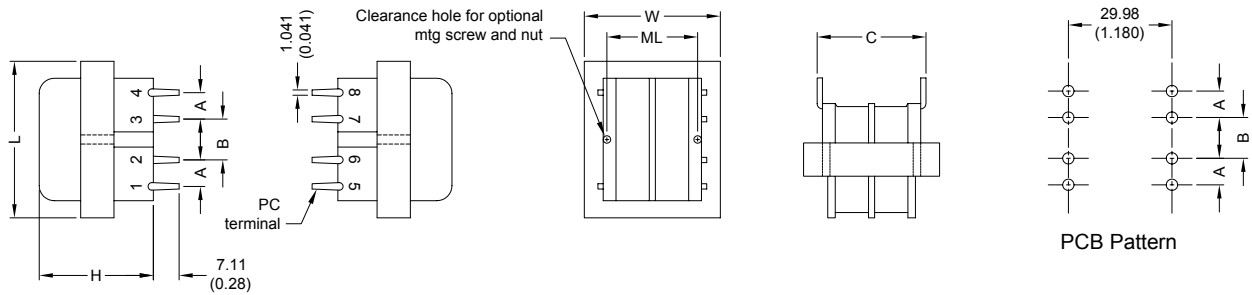

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
2	1.1	35.50 (1.40)	30.00 (1.180)	24.00 (0.95)	----	6.35 (.250)	6.35 (.250)	30.48 (1.200)	None	73

2. SCHEMATIC :



3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|------------------------------|
| a. Primary Voltage | AC 115/230 V 56/60 Hz . |
| b. No Load Primary Current | Less Than 10mA . |
| Input AC 115V 60Hz . | Less Than 10mA . |
| Input AC 230V 50Hz . | Series AC 37.80V . |
| c. Secondary Voltage (±5%) | Parallel AC 18.90V . |
| d. Secondary Load Current | Series 0.045A . |
| | Parallel 0.09A . |
| e. Full Load Primary Current | Less Than 20mA . |
| Input AC 115V 60Hz . | Less Than 15mA . |
| Input AC 230V 50Hz . | Series 24.00V . |
| f. Full Load Secondary Voltage (±5%) | Parallel 12.00V . |
| g. DC Resistance | |
| Pin 1-2 | Primary = 2236 Ohm . |
| Pin 3-4 | = 3016 Ohm . |
| Pin 5-6 | Secondary = 65.60 Ohm . |
| Pin 7-8 | = 84.40 Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (HI-POT) | AC 2500V 60Hz 1 Minutes . |
| j. Temperature Rise | Less Than 60 Deg C . |
| k. Core Size | EI-35 x 7.00 m/m . |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 1