


Model WS100 with analog output Explosion-proof



Sensor for hostile environments and offshore applications, with compression-proof sealing

- Protection class IP68
- Measurement ranges:
0 ... 2000 mm und 0 ... 3500 mm
- Analog output
- $\text{C} \text{E II 2GD EEx d IIC T6 IP67}$ (being prepared)
- Also available as non-ex version in an anodized aluminium housing

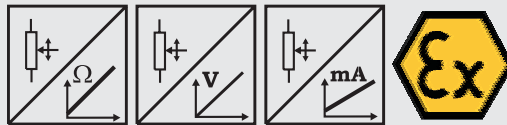

Specifications	Outputs	Potentiometer: 1 k Ω Voltage: 0...10 V Current: 4...20 mA, 2 or 3 wire
	Material	Stainless steel or aluminium; cable: stainless steel
Resolution	Essentially infinite	
Sensing device	Hybrid precision potentiometer	
Connection	Cable output, standard length 1.5 m	
Linearity	Up to ± 0.05 % full scale	
Weight	Approx. 13 kg (stainless steel)	
Temperature range	-20 to +70 $^{\circ}\text{C}$	
Conformity to standards		
Explosion-proof	EN 50014:2000; EN 50018:2000; EN 50281-1:1999	
EMC	EN 61326:2004	
Protection class of housing	EN 60529:2000, IP 67	
Shock	EN 60068-2-27:1993, 50 g 11 ms, 100 shocks	
Vibration	EN 60068-2-6:1995, 20 g, 10 Hz...2 kHz, 10 cycles	

Order code WS100 Analog	Model name	WS100xxx - [] - [] - [] - [] - []
	WS100EXD = Ex version WS100AL = Non-ex version in aluminium housing	
	Measurement Range (in mm) 2000 / 3500	
	Outputs (see pages 57 and 58) R1K = potentiometer 1 k Ω (other values on request) 10V = with 0 ... 10 V signal conditioner 420A = mit 4 ... 20 mA signal conditioner (2 wire) 420T = mit 4 ... 20 mA signal conditioner (3 wire) Other outputs on request	
	Linearity L10 = ± 0.10 % option: L05 = $\pm 0,05$ % L25 = ± 0.25 %	
	Connection KAB1,5M = cable output, length 1.5 m (standard)	
	Cable fixing M4 = M4 cable fixing SB0 = Cable clip	


Order Example: WS100EXD - 2000 - 420A - L10 - KAB1,5M - M4

Model WS100 with analog output Explosion-proof




Cable forces typical at 20 °C	Range	Maximum pull-out force	Minimum pull-in force
	[mm]	[N]	[N]
	2000	5.2	2.8
3500	6.2	3.0	

Outline drawing
WS100 - 2000

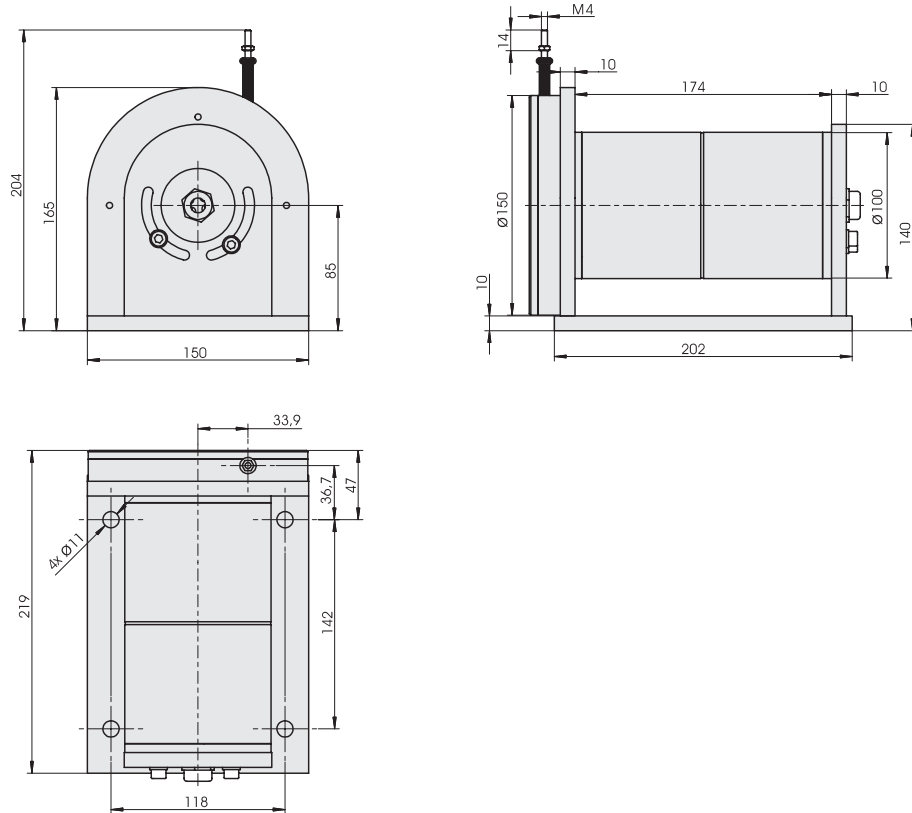

Outline drawing
WS100 - 3500

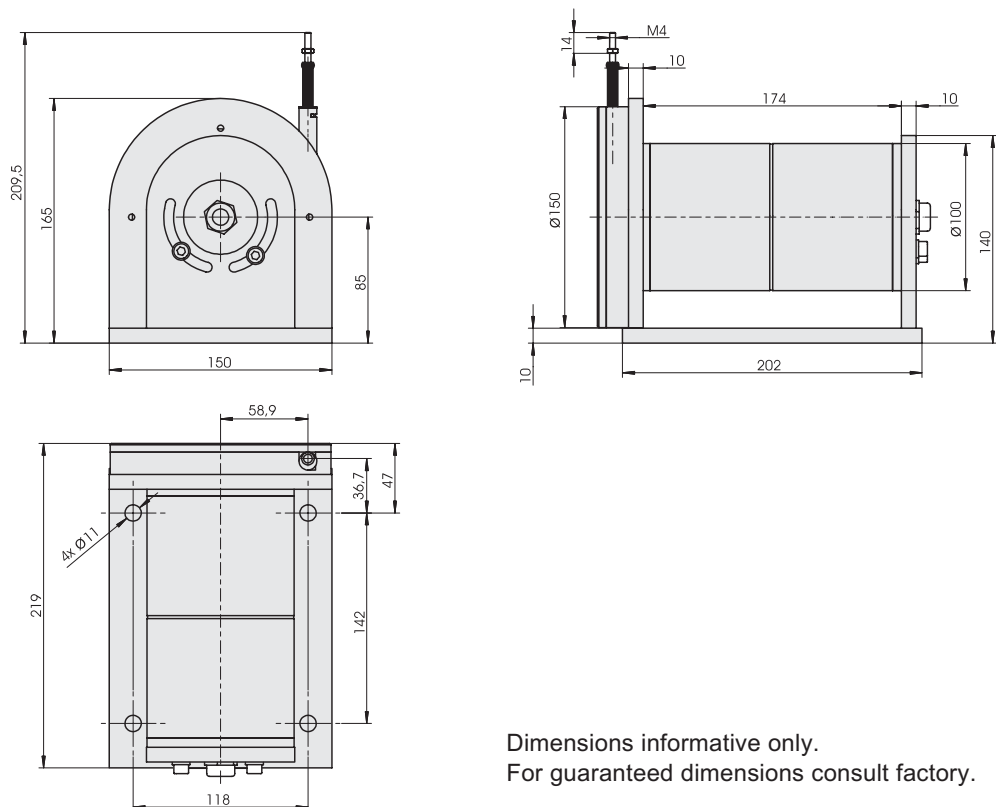

Dimensions informative only.
For guaranteed dimensions consult factory.

Model WS100 with incremental encoder output Explosion-proof



Sensor for hostile environments and offshore applications, with compression-proof sealing

- Protection class IP68
- Measurement ranges:
0 ... 2000 mm and 0 ... 3500 mm
- With incremental encoder output
- CE II 2GD EEx d IIC T6 IP67 (being prepared)
- Also available as non-ex version in an anodized aluminium housing



Specifications		
Outputs		Incremental encoder output HTL or TTL compatible
Material		Stainless steel or aluminium; cable: stainless steel
Resolution		2000 mm: 5 or 10 pulses per mm 3500 mm: 2.75 or 5.5 pulses per mm
Sensing device		Incremental encoder
Connection		Cable output, standard length 1.5 m
Linearity		Up to $\pm 0.05\%$ full scale
Weight		Approx. 13 kg (stainless steel)
Temperature		-20 to +70 °C
Conformity to standards		
	Explosion-proof	EN 50014:2000; EN 50018:2000; EN 50281-1:1999
	EMC	EN 61326:2004
	Protection class of housing	DIN EN 60529:2000, IP 67
	Shock	DIN EN 60068-2-27:1993, 50 g 11 ms, 100 shocks
	Vibration	DIN EN 60068-2-6:1995, 20 g, 10 Hz ... 2 kHz, 10 cycles

Order code WS100 Incremental	Model name	Measurement Range (in mm)	Pulses per mm	Outputs (see page 60)	Connection	Cable fixing
	WS100EXD = Ex-version WS100AL = Non-ex version in aluminium housing	2000 / 3500	2000 mm: 5 / 10 3500 mm: 2.75 / 5.5	IE24LI = Incremental encoder TTL compatible inverted IE24HI = Incremental encoder HTL compatible inverted	KAB1,5M = Cable output, length 1.5 m (standard)	M4 = M4 cable fixing SB0 = Cable clip


Order Example: WS100EXD - 2000 - 10 - IE24HI - KAB1,5M - M4

Model WS100 with incremental encoder output Explosion-proof




Cable forces typical at 20 °C	Range	Maximum pull-out force	Minimum pull-in force
	[mm]	[N]	[N]
	2000	5.2	2.8
3500	6.2	3	

Outline drawing
WS100 - 2000

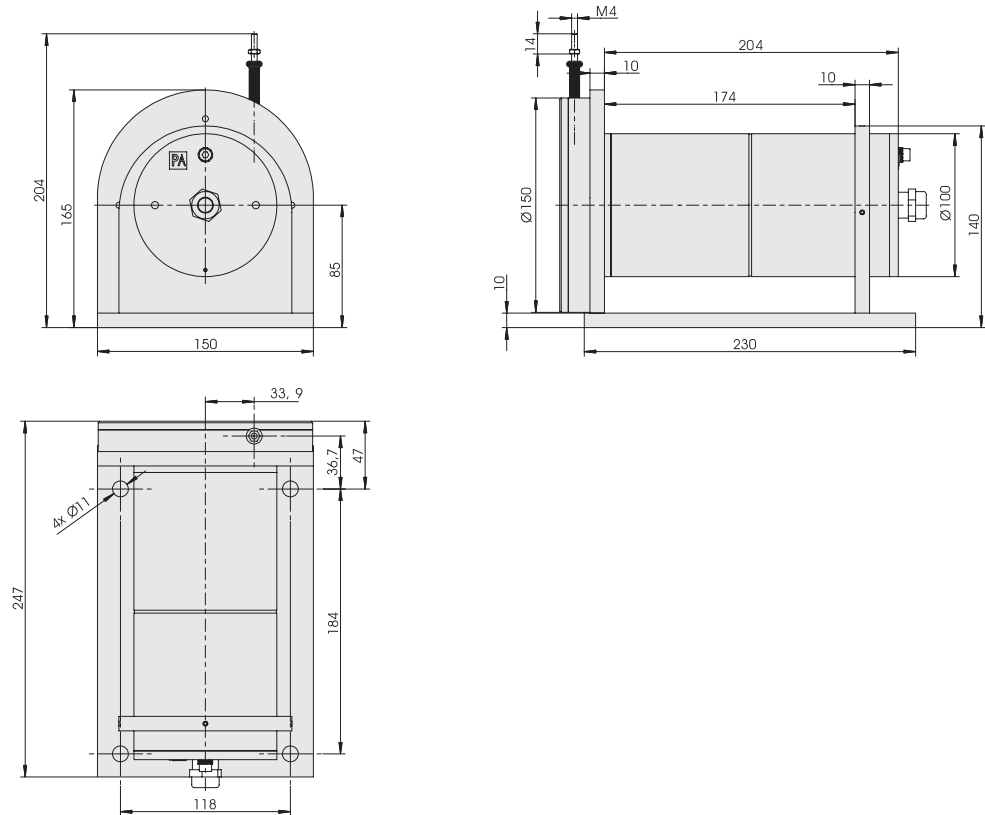

Outline drawing
WS100 - 3500

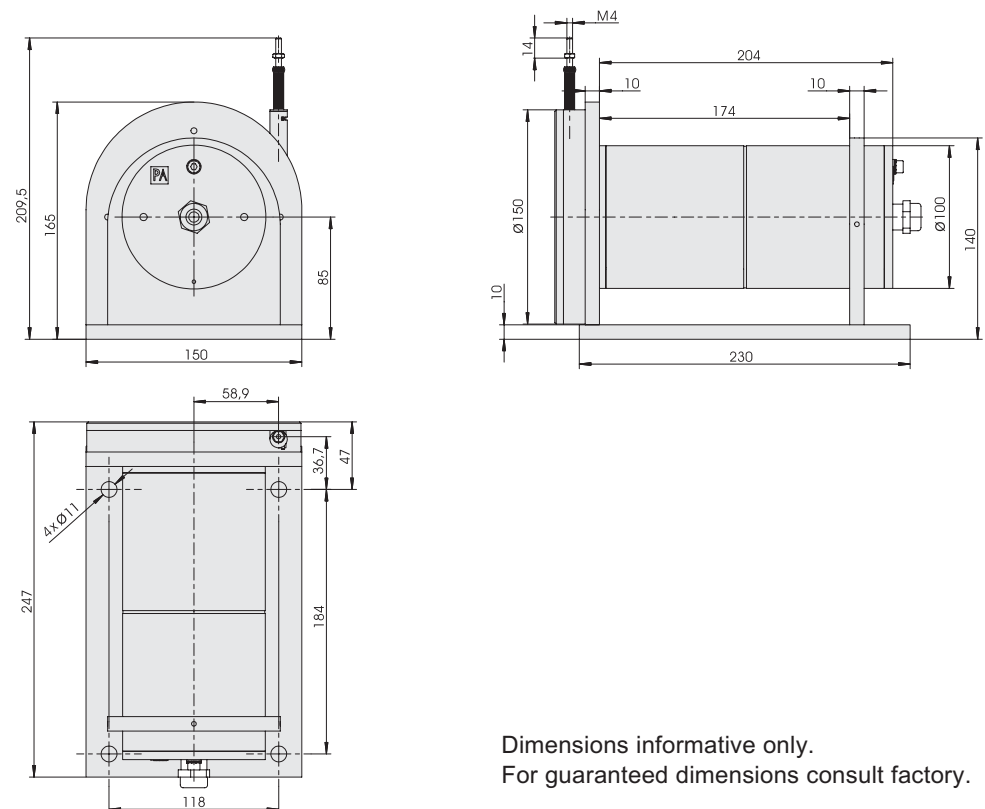

Dimensions informative only.
For guaranteed dimensions consult factory.


Output Specifications

R1K and 10V for WS position sensors




Voltage divider R1K Potentiometer 	Excitation Voltage	32 VDC max. at 1 k Ω (input power 1 W max.)
	Potentiometer Impedance	1 k Ω \pm 10%
	Thermal coefficient	\pm 25 x 10 ⁻⁶ / °C full scale
	Sensitivity	Depends on measurement range, individual sensitivity of sensor specified on label
	Voltage Divider Utilization Range	Approx. 3% ... 97% of full range
	Operating Temperature	-20 ... +85 °C


Signal diagram

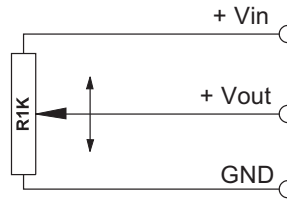

Note: The potentiometer must be connected as a voltage divider. The input impedance of the following processing circuit should be 10 M Ω min.

Signal conditioner 10V Voltage output 	Excitation Voltage	+18 ... +27 V DC non stabilized
	Excitation Current	20 mA max.
	Output Voltage	0 ... +10 V DC
	Output Current	2 mA max.
	Output Load	> 5 k Ω
	Stability (Temperature)	\pm 50 x 10 ⁻⁶ / °C full scale
	Protection	Reverse polarity, short circuit
	Output Noise	0,5 mV _{RMS}
	Operating Temperature	-20 ... +85 °C
	EMC	According to EN 61326:2004

Signal diagram

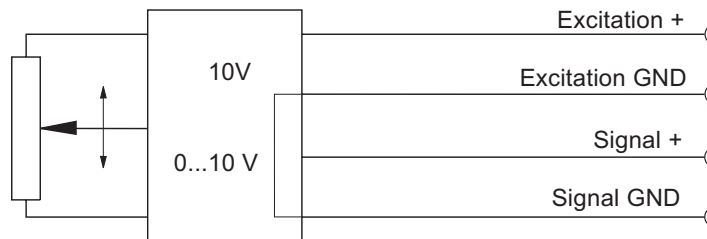


Signal Wiring	Output signals		Cable color	Connector pin no.
	R1K	10V		
	+ Vin	Excitation +	White	1
	GND	Excitation GND	Brown	2
	+ Vout	Signal +	Green	3
		Signal GND	Yellow	4


Connection

Mating Connector

View to solder terminals



CONN-DIN-8F-W




CONN-M12-8F-G


Output Specifications


420A and 420T for WS position sensors




Signal conditioner 420A Current output (2 wire) 	Excitation Voltage	+12 ... 27 VDC non stabilized, measured at the sensor terminals
	Excitation Current	35 mA max.
	Output Current	4 ... 20 mA equivalent to 0 ... 100% range
	Stability (Temperature)	$\pm 100 \times 10^{-6} / ^\circ\text{C}$ full scale
	Protection	Reverse polarity, short circuit
	Output Noise	0.5 mV _{RMS}
	Operating Temperature	-20 ... +85 °C
	EMC	According to EN 61326:2004

Signal Diagram

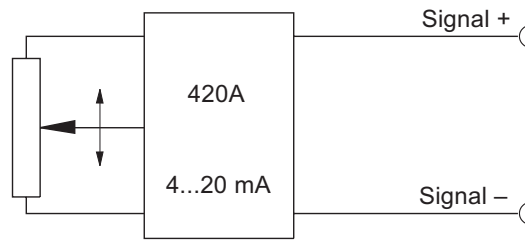

Signal Conditioner 420T Current output (3 wire) 	Excitation Voltage	+18...+27 V DC non stabilized
	Excitation Current	40 mA max.
	Load Resistor	350 Ω max.
	Output Current	4 ... 20 mA equivalent to 0 ... 100% range
	Stability (Temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ full scale
	Protection	Reverse polarity, short circuit
	Output Noise	0.5 mV _{RMS}
	Operating Temperature	-20 ... +85 °C
	EMC	According to EN 61326:2004


Signal diagram

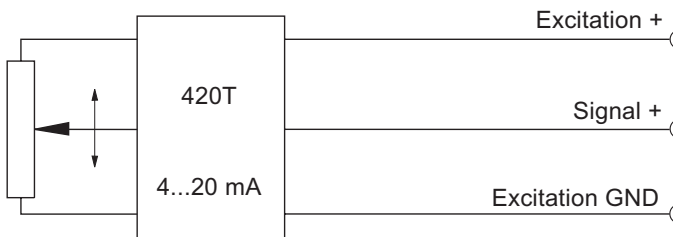

Signal Wiring	Output signals		Cable color	Connector pin no.
	420A	420T		
Signal +		Excitation +	White	1
Signal -		Excitation GND	Brown	2
		Signal +	Green	3

Connection

Mating Connector


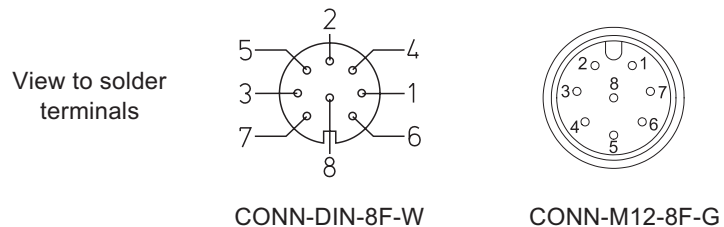


Output Specification


PMU for WS position sensors



Signal Conditioner PMU, adjustable Voltage output and current output (3 wire)	Excitation voltage	+18 ... 27 V DC
	Excitation current	50 mA max.
	Voltage output	0 ... 10 V
	Output current	10 mA max.
	Output load	1 kΩ min.
	Current output	4 ... 20 mA (3 wire)
	Load resistor	500 Ω max.
	Adjustment	
	Activation of offset and gain adjust	Connect with excitation GND (0 V)
	Scalable range	90 % max. full scale
	Stability (Temperature)	$\pm 50 \times 10^{-6} / ^\circ\text{C}$ full scale
	Protection	Reverse polarity, short circuit
	Output noise	1 mV _{eff}
Operating temperature	-20 ... +85 °C	
EMC	According to EN 61326:2004	




Signal diagram

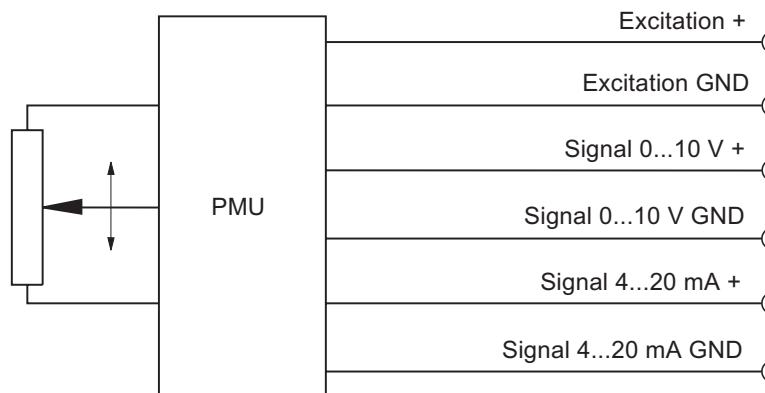

Signal wiring	Output signals	Connector pin no.
	Excitation +	1
	Excitation GND	2
	Signal 0...10 V +	3
	Signal 0...10 V GND	4
	Signal 4...20 mA +	5
	Signal 4...20 mA GND	6
	Offset	7
	Gain	8

Connection


Mating Connector

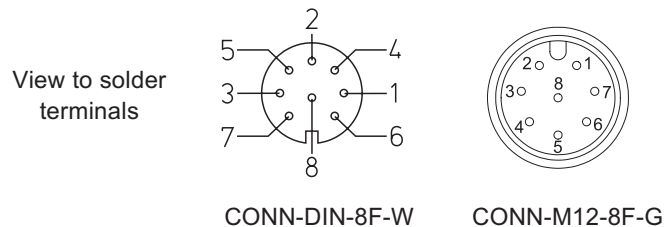


Output Specifications

IE24LI and IE24HI for WS position sensors




IE24LI and IE24HI incremental	IE24LI		IE24HI
		Excitation voltage	5 V DC $\pm 10\%$
	Excitation current	100 mA max.	
	Output frequency	200 kHz	
	Output	Push-pull and inverted signals	
	Output current	10 mA max.	
	Output voltage	Depending on the excitation voltage	
	Stability (temperature)	$\pm 20 \times 10^{-6} / ^\circ\text{C}$ f.s. (sensor mechanism)	
	Operation temperature	-20 ... +85 $^\circ\text{C}$	
	Protection	Short circuit	
	EMC	According to EN 61326:2004	

Output signals

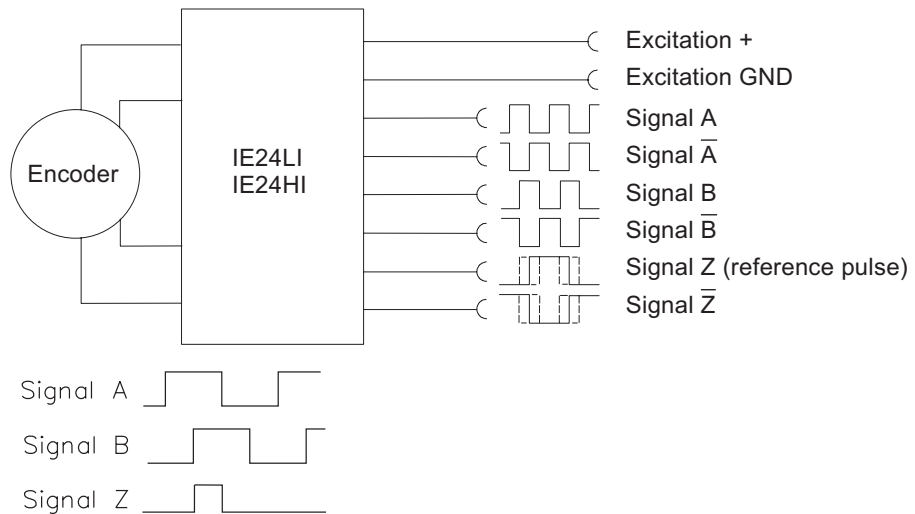

Output circuit and recommended processing input circuit

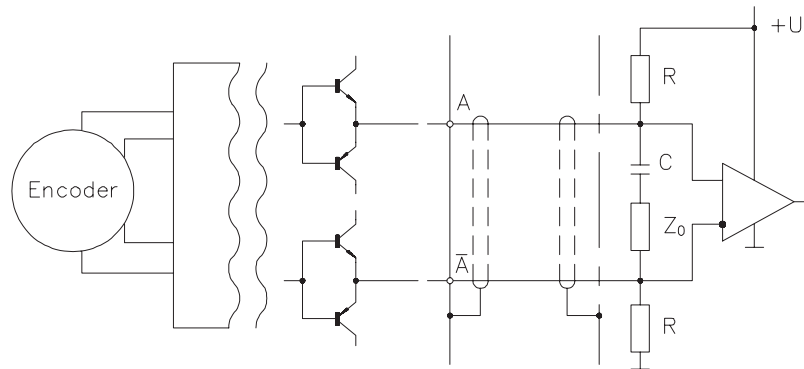

Signal wiring	Output signals	Cable color	Connector pin no.
	Excitation +	Brown	1
	Excitation GND	White	2
	Signal B (A + 90°)	Grey	3
	Signal A	Green	4
	Signal \bar{B}	Pink	5
	Signal \bar{A}	Yellow	6
	Signal Z (reference pulse)	Blue	7
	Signal \bar{Z}	Red	8

Connection

Mating connector

