



CRYSTAL CONTROLLED OSCILLATORS

14 PIN DIP 5.0V STRATUM 3 PLUS HCMOS OCXO



ABSOLUTE MAXIMUM RATINGS

TABLE 1.0

PARAMETER	UNITS	MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Storage Temperature		-40	-	85	°C	
Supply Voltage	(Vcc)	-0.5	-	7.0	Vdc	

OPERATING SPECIFICATIONS

TABLE 2.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
Center Frequency	(Fo)	9.00	-	20.00	MHz	
Frequency Calibration		-0.30	-	0.30	ppm	1
Frequency vs. Change in Temperature		-0.21	-	0.21	ppm	2
Frequency vs. Change in Supply Voltage		-0.05	-	0.05	ppm	3
Frequency vs. Change in Load		-0.02	-	0.02	ppm	4
Frequency Aging Daily		-	-	2	ppb/day	
Frequency Aging per year		-0.2	-	0.2	ppm	
Total Frequency Tolerance		-1.5	-	1.5	ppm	5
Operating Temperature Range		-20	-	70	°C	
Supply Voltage	(Vcc)	4.75	5.00	5.25	Vdc	
Supply Current	(Icc)	-	-	300	mA	
Supply Current Steady State @25°C	(Icc)	-	75	-	mA	
Allan Variance (1 second)		-	5.00E-10	-		
Jitter (10Hz to 10 MHz)		-	-	1	ps RMS	
SSB Phase Noise at 1Hz offset		-	-70	-	dBc/Hz	
SSB Phase Noise at 10Hz offset		-	-100	-	dBc/Hz	
SSB Phase Noise at 100Hz offset		-	-125	-	dBc/Hz	
SSB Phase Noise at 1KHz offset		-	-140	-	dBc/Hz	
SSB Phase Noise at 10KHz offset		-	-150	-	dBc/Hz	
Start Up Time: Oscillator		-	-	10	mS	
Warm Up Time		-	-	5	Minutes	6
Retrace		-0.3	-	0.3	ppm	7
TDEV @ 1.0 Sec.		-	-	1	nS	
TDEV @ 4.0 Sec.		-	-	2	nS	

AGOF5S3P

DESCRIPTION

The Connor-Winfield AGOF5S3P is a hermetically sealed 14 Pin DIP, 5.0V Oven Controlled Crystal Oscillator (OCXO) with a HCMOS / TTL compatible output. The AGOF5S3P is designed for higher stability Stratum 3 Plus applications requiring low jitter and tight calibration.

FEATURES

5.0V OPERATION

FREQUENCY STABILITY ±0.21ppm

TEMPERATURE RANGE: -20 to 70°C

OVERALL FREQUENCY TOLERANCE : ±1.5ppm over Twenty Years.

OVERALL AGING: ±0.5ppm over Twenty Years

RoHS 5/6 COMPLIANT

ORDERING INFORMATION

AGOF5S3P - 10.00MHz

OCXO
SERIES

CENTER
FREQUENCY

HCMOS OUTPUT CHARACTERISTICS

TABLE 3.0

PARAMETER		MINIMUM	NOMINAL	MAXIMUM	UNITS	NOTE
LOAD		12	15	18	pf	
Voltage (High)	(Voh)	4.75	-	-	Vdc	8
(Low)	(Vol)	-	-	0.4	Vdc	8
Current (High)	(Ioh)	-4	-	-	mA	
(Low)	(Iol)	-	-	4	mA	
Duty Cycle at 50% of Vcc		45	50	55	%	
Rise / Fall Time 10% to 90%		-	-	6	nS	

PACKAGE CHARACTERISTICS

TABLE 4.0

Package	14 pin DIP, hermetically sealed, grounded case, welded package
---------	--

Notes:

- 1) Initial calibration @ 25°C at time of shipment.
- 2) Frequency vs. temperature stability, -20 to 70°C absolute.
- 3) Frequency stability per 5% change in supply voltage.
- 4) Frequency stability per 5% change in load
- 5) Inclusive of calibration, operating temperature range, supply voltage change, load change, shock and vibration and aging over 20 years.
- 6) Measured @ 25°C, within 5 minutes, the unit will be within +/-0.5ppm of nominal.
- 7) 24 hours off then 60 minutes on at a constant temperature and voltage.
- 8) Supply voltage at 5.00 Vdc.

Specifications subject to change without notice.

CRYSTAL CONTROLLED OSCILLATORS

ENVIRONMENTAL CHARACTERISTICS

Temperature Cycle: Per MIL-STD-883, Method 1010, Condition B. -55°C to 125°C, 20 cycles, 10 minute dwell, 1 minute transition.

Gross Leak Test: Per MIL-STD-202, Method 112, Condition D. No bubbles in flourinert (FC-43) at 125°C ±5°C for 20 seconds.

SOLDERING

Pin Solderability: Per MIL-STD-883, Method 200. 8 hour steam age prior to 254°C ±5°C Solder pot dip, 95% Coverage.

Resistance to Solder Heat: Per MIL-STD-202, Method 210, Condition C. Wave: Topside board-mount product, 260°C ±5°C for 20 Seconds.


MECHANICAL CHARACTERISTICS

Vibration: Per MIL-STD-202, Method 204, Condition A. 10G's peak, 10Hz to 500Hz, 15minute cycles 12 times each perpendicular axis.


Shock: Per MIL-STD-202, Method 213, Condition D. 500G's, 1ms, halfsine, 3 shocks per direction.

Moisture Resistance: Per MIL-STD-202, Method 106. 95% RH @ 65°C, 10 cycles 10°C to 65°C.


Package Outline and Pin Connections

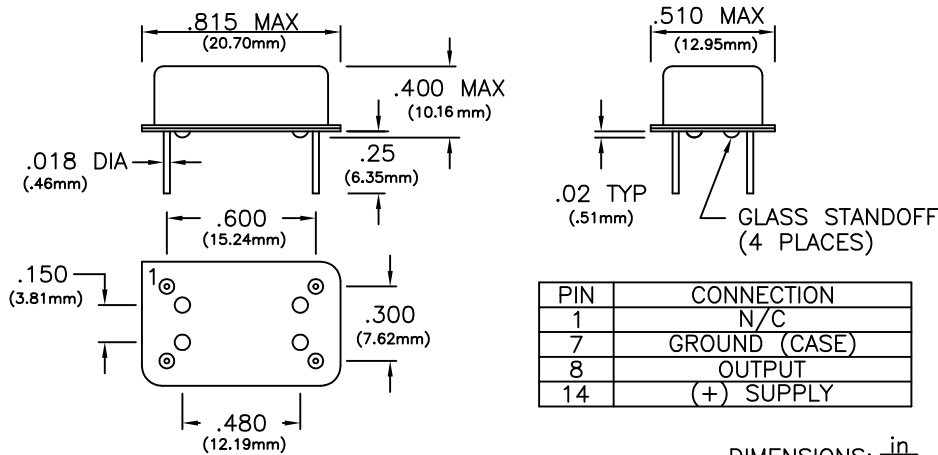

Test Circuit

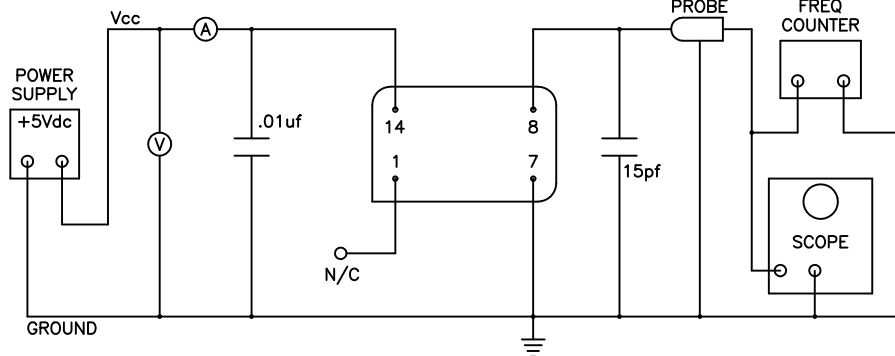

Solder Profile

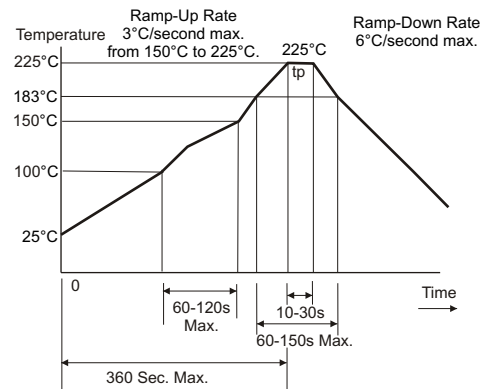

Specifications subject to change without notice.