

ULTRA MINIATURE CERAMIC SMD CRYSTAL



ABM8

3.2 x 2.5 x 0.7mm

ABM8



RoHS
Compliant

FEATURES:

- Low in height; suitable for thin equipment.
- Ceramic package and metal lid assures high reliability.
- Tight tolerance and stability available.
- Suitable for solder reflow.
- High precision crystal, fundamental mode.

APPLICATIONS:

- High density applications.
- Modems, communication and test equipment.
- PCMCIA, Wireless applications.

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ABM8 Series
Frequency Range	10.00 MHz - 60.00 MHz
Operation Mode	Fundamental
Operating Temperature	-10°C to +60°C (see options)
Storage Temperature	-55°C to +125°C
Frequency Tolerance at +25°C	± 50 ppm max. (see options)
Frequency Stability over the Operating Temp. (Ref to +25°C)	± 50 ppm max. (see options)
Equivalent Series Resistance	See Table 1
Shunt Capacitance C ₀	7pF max.
Load Capacitance C _L	18pF (see options)
Drive Level	100μΩ max., 10μΩ Typical
Aging at 25°C First Year	± 5ppm max.
Insulation Resistance	500MΩ min. @ 100Vdc ± 15V

TABLE 1

FREQ (MHz)	ESR (Ω)max.
10.000 - 15.999	200
16.000 - 19.999	100
20.000 - 29.999	80
30.000 - 60.000	50

OPTIONS AND PART IDENTIFICATION (Left blank if standard):

ABM8□ - Frequency - □ - R□□□ - □ - □ - □ - □

Height (mm)	
Blank	0.70+/-0.10
1	0.65+/-0.05
2	0.60+/-0.10
3	0.55+/-0.05

Frequency
XX.XXXX MHz

Load Capacitance
Please specify CL in pF or S for Series (minimum 7pF)

*Consult with ABRACON for CL value under 10pF.)

ESR
RXXX (value in ohms if it is custom.)

Operating Temp.
E 0°C to +70°C
B -20°C to +70°C
C -30°C to +70°C
N -30°C to +85°C
D -40°C to +85°C

*Contact ABRACON for wider temp range.

Freq. Tolerance
1 ± 10 ppm
7 ± 15 ppm
2 ± 20 ppm
3 ± 25 ppm
4 ± 30 ppm

Packaging
T Tape and Reel


Please see Page 6 for quantity

Freq. Stability
U ± 10 ppm (*)
G ± 15 ppm (*)
X ± 20 ppm
W ± 25 ppm
Y ± 30 ppm
H ± 35 ppm
Z ± 100 ppm (#)

(*) -10°C to +60°C only

(#) For extended temperatures

*Contact ABRACON for tighter freq. stability.



ULTRA MINIATURE CERAMIC SMD CRYSTAL




ABM8

3.2 x 2.5 x 0.7mm


ABM8



OUTLINE DRAWING: Please see Table 2 below for height and chamfer information

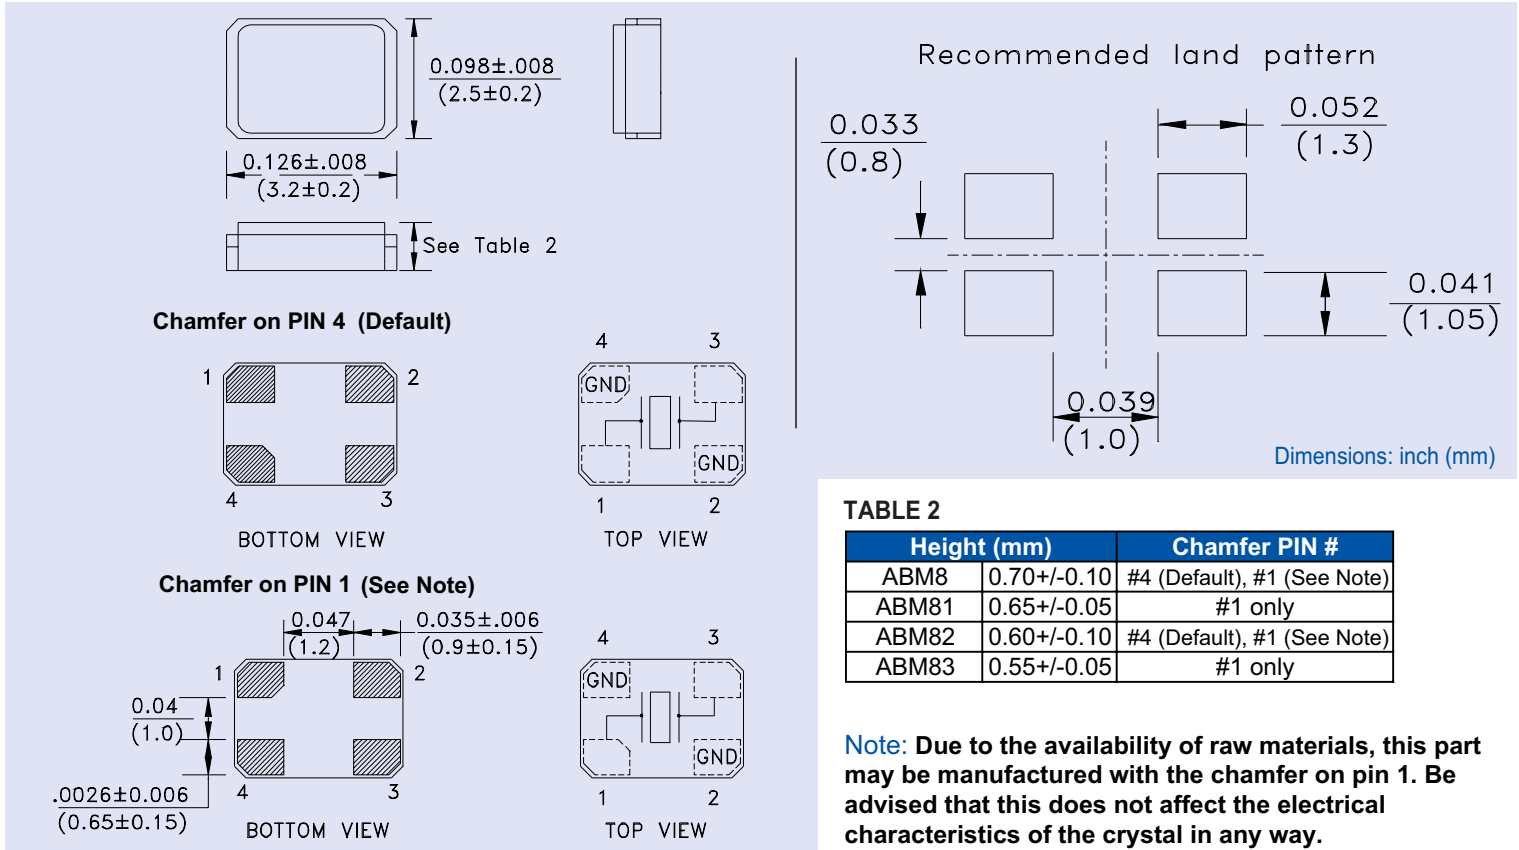

TAPE & REEL:

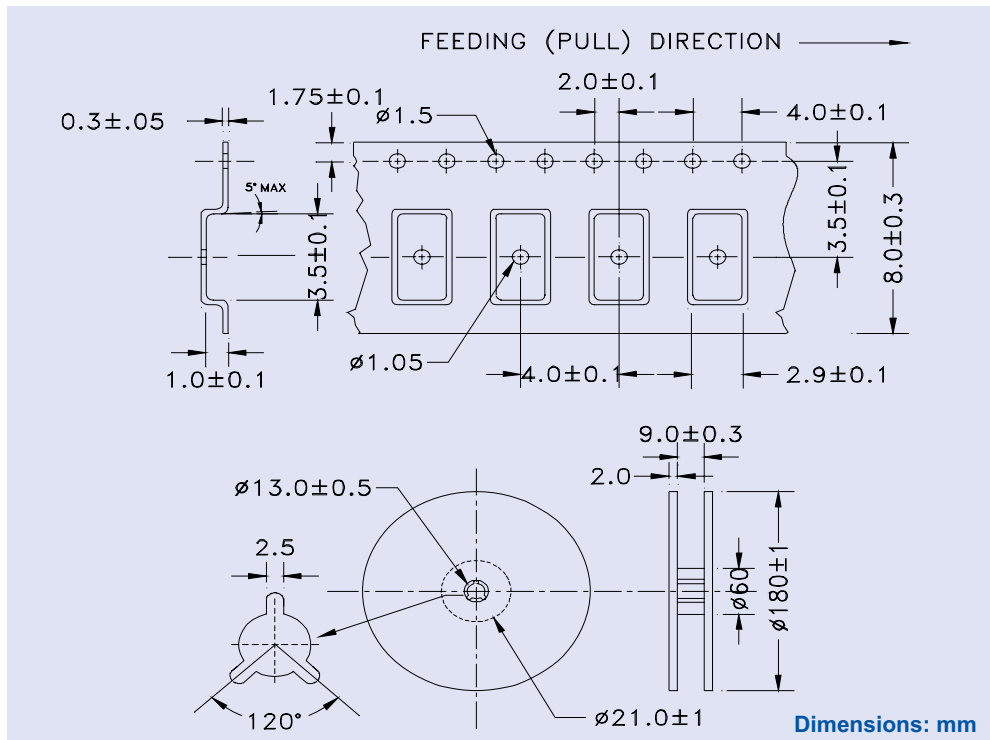

Tape and reel (1,000pcs/reel) : ABM8, ABM82
Tape and reel (3,000pcs/reel) : ABM81, ABM83