

**LED DOT MATRIX**
**BL-M15X882**
**Features:**

- 38.00mm (1.5") F 3.7 dot matrix LED display.
- Low current operation.
- Excellent character appearance.
- Easy mounting on P.C. Boards or sockets.
- I.C. Compatible.
- ROHS Compliance.


**Super Bright**
**Electrical-optical characteristics: (Ta=25 ° C) (Test Condition: IF=20mA)**

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ <sub>p</sub> (nm)	Typ	Max	
BL-M15A882S-XX	BL-M15B882S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	250
BL-M15A882D-XX	BL-M15B882D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	320
BL-M15A882UR-XX	BL-M15B882UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	400
BL-M15A882E-XX	BL-M15B882E-XX	Orange	GaAsP/GaP	635	2.10	2.50	190
BL-M15A882Y-XX	BL-M15B882Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	190
BL-M15A882G-XX	BL-M15B882G-XX	Green	GaP/GaP	570	2.20	2.50	195

**Ultra Bright**
**Electrical-optical characteristics: (Ta=25 ° C) (Test Condition: IF=20mA)**

Part No		Chip			VF Unit:V		Iv TYP.(mcd)
Row Cathode Column Anode	Row Anode Column Cathode	Emitted Color	Material	λ <sub>p</sub> (nm)	Typ	Max	
BL-M15A882UHR-XX	BL-M15B882UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	400
BL-M15A882UE-XX	BL-M15B882UE-XX	Ultra Orange	AlGaInP	630	2.10	2.50	235
BL-M15A882YO-XX	BL-M15B882YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	235
BL-M15A882UY-XX	BL-M15B882UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	235
BL-M15A882UG-XX	BL-M15B882UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	250
BL-M15A882PG-XX	BL-M15B882PG-XX	Ultra Pure Green	InGaN	525	3.80	4.50	270
BL-M15A882B-XX	BL-M15B882B-XX	Ultra Blue	InGaN	470	2.70	4.20	180
BL-M15A882W-XX	BL-M15B882W-XX	Ultra White	InGaN	/	2.70	4.20	235

--XX: Surface / Lens color :

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

**LED DOT MATRIX**
**BL-M15X882**
**Absolute maximum ratings (Ta=25°C)**

Parameter		S	D	UR	E	Y	G	Unit
Forward Current $I_f$		25	25	25	25	25	30	mA
Power Dissipation $P_d$		60	60	60	60	60	65	mW
Reverse Voltage $V_R$		5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)		150	150	150	150	150	150	mA
Operation Temperature $T_{OPR}$	-40 to +80							°C
Storage Temperature $T_{STG}$	-40 to +85							°C
Lead Soldering Temperature $T_{SOL}$	Max.260±5 °C for 3 sec Max. (1.6mm from the base of the epoxy bulb)							°C

**■ Absolute maximum ratings (Ta=25°C)**


Parameter	UHR	UE	YO	UY	UG	PG	B	W	Unit
Forward Current $I_f$	30	30	30	30	30	30	30	30	mA
Power Dissipation $P_d$	75	65	65	65	75	110	120	120	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	100	100	mA
Operation Temperature $T_{OPR}$	-40 to +80								°C
Storage Temperature $T_{STG}$	-40 to +85								°C
Lead Soldering Temperature $T_{SOL}$	Max.260±5 °C for 3 sec Max. (1.6mm from the base of the epoxy bulb)								°C

LED DOT MATRIX


BL-M15X882

■ Package configuration & Internal circuit diagram


BL-M15X882 Series

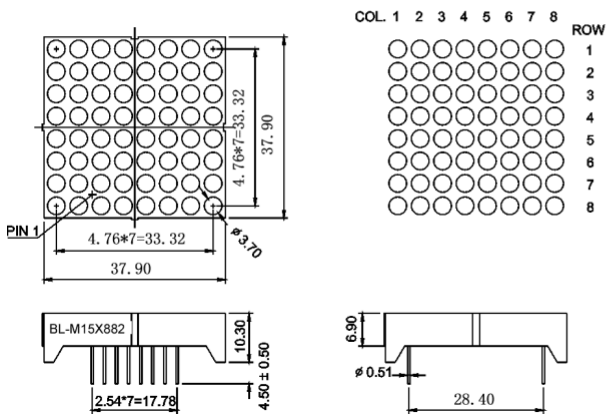

BL-M15A882

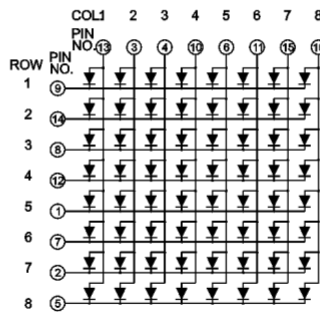

BL-M15B882

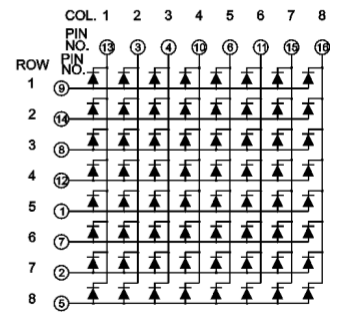


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.


## LED DOT MATRIX

BL-M15X882


### Typical electrical-optical characteristics curves:

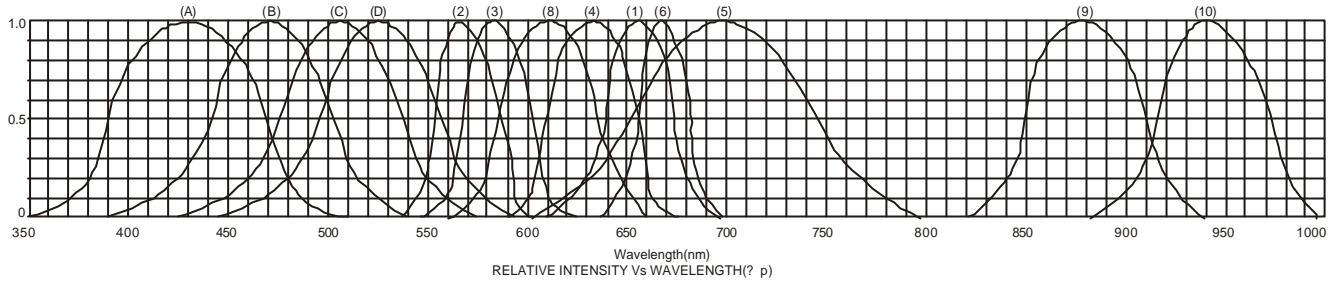


- |   |                                      |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red                | (9) - GaAlAs 880nm                   |
| (2) - GaP 570nm/Yellow Green              | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow              | (A) - GaN/SiC 430nm/Blue             |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue           |
| (5) - GaP 700nm/Bright Red                | (C) - InGaN/SiC 505nm/Ultra Green    |
| (6) - GaAlAs/GaAs 660nm/Super Red         | (D) - InGaAl/SiC 525nm/Ultra Green   |
| (8) - GaAsP/GaP 610nm/Super Red           |                                      |

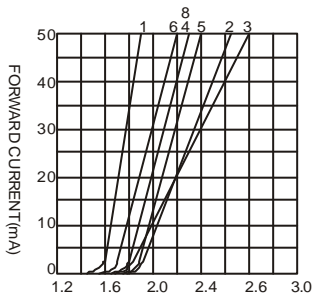


FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS.  
FORWARD VOLTAGE

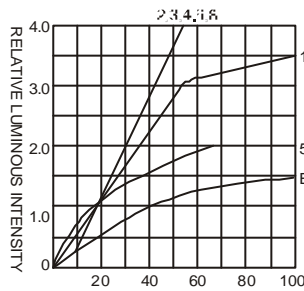


FORWARD CURRENT (mA)  
RELATIVE LUMINOUS  
INTENSITY VS. FORWARD  
CURRENT

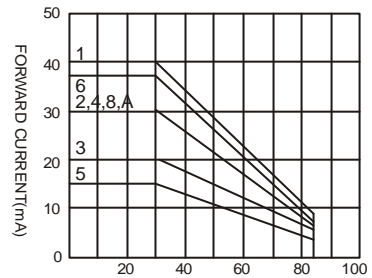


AMBIENT TEMPERATURE Ta ( )  
FORWARD CURRENT VS. AMBIENT  
TEMPERATURE

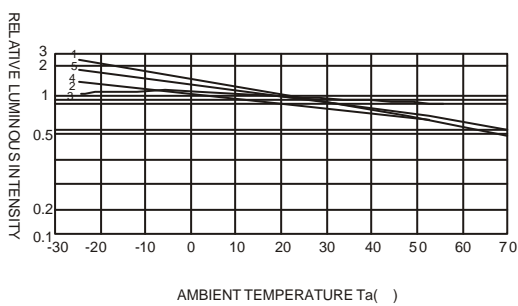

AMBIENT TEMPERATURE Ta ( )

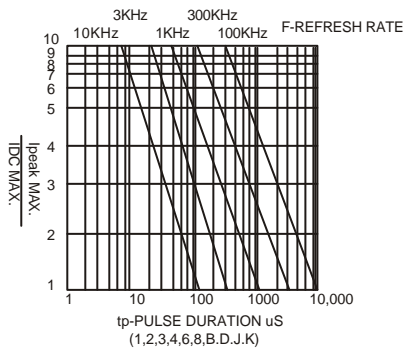

tp-PULSE DURATION µS  
(1,2,3,4,6,8,B,D,J,K)

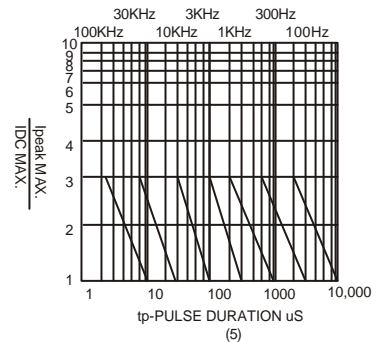

(5)

NOTE:25 free air temperature unless otherwise specified